



netZero^{usa}
LED LIGHTING SOLUTIONS

2022 PRODUCT CATALOG

Revision 22.6



nZLED[®]
AMERICAN ENGINEERED

nZGUV[®]
GERMICIDAL LIGHTING

888.326.2220
netzero-usa.com



● A SEAMLESS CUSTOMER EXPERIENCE

NetZero USA® is a nationwide, end-to-end provider of commercial LED lighting solutions. We design, manufacture, install, finance, warranty and service our products.

Our unique approach combines state-of-the-art technology with innovative programs to deliver efficient lighting solutions in a seamless customer experience.

Our mission is to be a trusted partner, delivering the right amount of light with the most amount of life, while reducing energy waste, at a net-zero cost to our customers.

● REDEFINING THE LIGHTING INDUSTRY

NetZero USA® is the lighting industry's first – and only – vertically integrated energy reduction company. From product design and manufacturing, to installation and service, and everything in between, we exercise full control over our products and services.

We partner with global industry leaders to bring the latest technology to market and facilitate our best-in-class programs. Our national footprint of NetZero USA® locations gives us the ability to manage projects of any size; across multiple states, regions, and regulatory bodies.



NO CAPITAL REQUIRED

You're already paying for your new lights. Our innovative Z.E.R.O. Funding Program® allows us to use the money you're currently over-paying to your utility to fund your LED upgrade. This means no out-of-pocket expense to you.



AN A.C.E. UP OUR SLEEVES

One size does not fit all. Our proprietary A.C.E. Energy Analysis® is a free, comprehensive assessment process that produces effective lighting and energy-reduction solutions – customized for the exact needs of your facility.



BUILT FOR MAX LIFE

Never pay for lighting maintenance again. Our state-of-the-art NZLED® lighting products are American designed and engineered using premium components. Manufactured by us for maximum life, they're backed by our industry-leading, **Non-Prorated Product Warranty**.



USING GUV TO DISINFECT

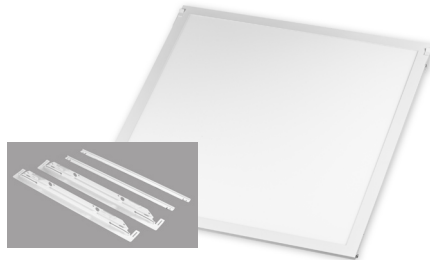
Comprehensive, highly effective, delivered UV-C light in multiple different solutions for disinfection and sanitization purposes. FDA compliant and EPA registered.



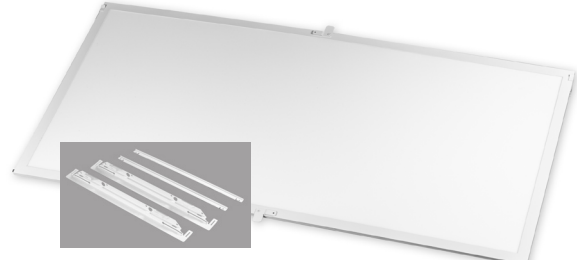
FLAT PANEL SERIES	1	CANOPY LIGHT SERIES.....	27
RETROFITS	1	PRODUCTS	27
REPLACEMENTS / NEW CONSTRUCTION	2		
ACCESSORIES	3	WALL PACK SERIES	28
		PRODUCTS	28
CENTER BASKET SERIES	4	ACCESSORIES	31
RETROFITS	4		
REPLACEMENTS / NEW CONSTRUCTION	5	COBB LIGHT SERIES.....	32
		PRODUCTS	32
LENSED RETROFIT STRIP KIT SERIES	6		
PRODUCTS	6	HID RETROFIT SERIES.....	34
ACCESSORIES	8	PRODUCTS	34
RETROFIT STRIP KIT SERIES.....	9	SENSORS / SWITCHES.....	36
PRODUCTS	9	PRODUCTS	36
ACCESSORIES	12		
		POWER SERIES	37
SHOP LIGHT RETROFIT SERIES.....	13	SURGE SUPPRESSION	37
PRODUCTS	13	STEP DOWN TRANSFORMER.....	38
		EMERGENCY BATTERY PACK.....	39
HIGH BAY SERIES.....	15		
PRODUCTS	15	EGRESS SECURITY SERIES	40
ACCESSORIES	17	PRODUCTS	40
VAPOR TIGHT SERIES	18	GERMICIDAL UV SERIES.....	41
PRODUCTS	18	UPPER-ROOM UNIT	41
		HANDHELD UNIT	42
DOWN LIGHT SERIES.....	19	PORTABLE TOWER UNIT.....	43
PRODUCTS	19	REPLACEMENT BULBS	44
ACCESSORIES	22	PORTABLE BATTERY	45
FLOOD LIGHT SERIES	23	ADMINISTRATIVE	46
PRODUCTS	23	CONTACTS	46
AREA LIGHT SERIES	24		
PRODUCTS	24		
ACCESSORIES	26		

SERIES PRODUCTS

NZLED® 7225.1



NZLED® 7436.1



Part Number	NZ-7225.1-QQ	NZ-7436.1-QQ
Description	Dual 3-Way Switching 2' X 2' Retrofit Flat Panel	Dual 3-Way Switching 2' X 4' Retrofit Flat Panel
Type	Retrofit	Retrofit
Applications	Indoor Luminaires: 2x2 Troffer	Indoor Luminaires: 2x4 Troffer
CCT	Onboard 3-Way Switch: 3500K / 4000K / 5000K	Onboard 3-Way Switch: 3500K / 4000K / 5000K
Input Power	Onboard 3-Way Switch: 18W / 22W / 25W	Onboard 3-Way Switch: 23W / 30W / 36W
Lumen Output	2358-2394 / 2816-2860 / 3125-3175	3013-3059 / 3840-3900 / 4500-4572
Certifications	DLC, UL 1598C	DLC, UL 1598C
Dimensions	23.8"W x 23.9"H x 1.09"D	47.8"W x 23.9"H x 1.09"D
Driver	NZUSA External	NZUSA External
Grounded	YES	YES
Housing Color	White	White
Warranty	7 Years	7 Years
L70 Lifetime	>100K Hours	>100K Hours
Input Voltage	AC100-277V	AC100-277V
Operating Temp.	-4°F TO 113°F	-4°F TO 113°F
IP Rating	IP40	IP40
0-10V Dimmable	YES	YES
User-Tunable	Dual Switching: CCT, Input Power	Dual Switching: CCT, Input Power
Controls Compatible	YES	YES
Dark Sky Compliant	—	—
Accessories	—	—
Options	—	—
Ordering Notes	—	—

CERTIFICATIONS

	NZLED® 7225.1	NZLED® 7436.1
DLC Model No.	NZ-7225.1-QQ	NZ-7436.1-QQ
DLC ID	PLYP4Y6IHXTZ	PL1ZNP76RJSB
UL No.	E491844	E491844

SERIES PRODUCTS


	NZLED® 8240.2	NZLED® 8450.2
		
Part Number	NZ-8240.2	NZ-8450.2
Description	Dual 3-Way Switching 2' X 2' Standard Flat Panel	Dual 3-Way Switching 2' X 4' Standard Flat Panel
Type	Replacement / New Construction	Replacement / New Construction
Applications	Indoor Luminaires: 2x2 Troffer	Indoor Luminaires: 2x4 Troffer
CCT	3500K / 4000K / 5000K	3500K / 4000K / 5000K
Input Power	25W / 30W / 40W	30W / 40W / 50W
Lumen Output	3000-3050 / 3510-3570 / 4400-4480	3630-3690 / 4680-4760 / 5550-5650
Certifications	DLC, UL 1598C	DLC, UL 1598C
Dimensions	23.7"W x 23.7"H x 1.09"D	47.72"W x 23.7"H x 1.09"D
Driver	NZUSA External	NZUSA External
Grounded	YES	YES
Housing Color	White	White
Warranty	7 Years	7 Years
L70 Lifetime	>100K Hours	>100K Hours
Input Voltage	AC100-277V	AC100-277V
Operating Temp.	-4°F TO 113°F	-4°F TO 113°F
IP Rating	IP40	IP40
0-10V Dimmable	YES	YES
User-Tunable	Dual Switching: CCT, Input Power	Dual Switching: CCT, Input Power
Controls Compatible	YES	YES
Dark Sky Compliant	—	—
Accessories	8240PM, 8240SM	8450PM, 8450SM
Options	Factory-installed BBU, PN 8240.2-EM	Factory-installed BBU, PN 8450.2-EM
Ordering Notes	—	—

CERTIFICATIONS

	NZLED® 8240.2	NZLED® 8450.2
DLC Model No.	NZ-8240.2	NZ-8450.2
DLC ID	PLN9ALVQ5V3Q	PLY32VIFOK67
UL No.	E491844	E491844



SERIES ACCESSORIES

	ACC 8240-SM	ACC 8450-SM	ACC 8000-BBU
			
Part Number	8240.2SM	8450.2SM	8000-BBU
Description	2' X 2' Flat Panel Surface Mount	2' X 4' Flat Panel Surface Mount	Universal BBU Mounting Bracket
Fits Products	8240.2	8450.2	8240.2, 8450.2
Ordering Notes	—	—	—

SERIES PRODUCTS

	NZLED® 1230.1	NZLED® 1434.1
		
Part Number	NZ-1230.1-QQ	NZ-1434.1-QQ
Description	Dual 3-Way Switching 2' X 2' Retrofit Center Basket	Dual 3-Way Switching 2' X 4' Retrofit Center Basket
Type	Retrofit	Retrofit
Applications	Indoor Luminaires: 2x2 Troffer	Indoor Luminaires: 2x4 Troffer
CCT	Onboard 3-Way Switch: 3500K / 4000K / 5000K	Onboard 3-Way Switch: 3500K / 4000K / 5000K
Input Power	Onboard 3-Way Switch: 18W / 25W / 32W	Onboard 3-Way Switch: 28W / 34W / 42W
Lumen Output	2358-2394 / 3200-3250 / 4000-4064	3668-3724 / 4352-4420 / 5250-5334
Certifications	DLC, UL 1598C	DLC, UL 1598C
Dimensions	23.8" x 23.9"	47.88" x 23.9"
Driver	NZUSA External	NZUSA External
Grounded	YES	YES
Housing Color	White	White
Warranty	7 Years	7 Years
L70 Lifetime	>100K Hours	>100K Hours
Input Voltage	AC120-277V	AC120-277V
Operating Temp.	-4°F TO 122°F	-4°F TO 122°F
IP Rating	IP60	IP60
0-10V Dimmable	YES	YES
User-Tunable	Dual Switching: CCT, Input Power	Dual Switching: CCT, Input Power
Controls Compatible	YES	YES
Dark Sky Compliant	—	—
Accessories	—	—
Options	—	—
Ordering Notes	—	—

CERTIFICATIONS

	NZLED® 1230.1	NZLED® 1434.1
DLC Model No.	NZ-1230.1-QQ+(Blank or -EM)	NZ-1434.1-QQ+(Blank or -EM)
DLC ID	PLE81EVJQ40	PLACSM4F40T4
UL No.	E491905	E491905

SERIES PRODUCTS

	NZLED® 3230.2	NZLED® 3434.2
		
Part Number	NZ-3230.2-QQ	NZ-3434.2-QQ
Description	Dual 3-Way Switching 2' X 2' Standard Center Basket	Dual 3-Way Switching 2' X 4' Standard Center Basket
Type	Replacement / New Construction	Replacement / New Construction
Applications	Indoor Luminaires: 2x2 Troffer	Indoor Luminaires: 2x4 Troffer
CCT	Onboard 3-Way Switch: 3500K / 4000K / 5000K	Onboard 3-Way Switch: 3500K / 4000K / 5000K
Input Power	Onboard 3-Way Switch: 20W / 25W / 30W	Onboard 3-Way Switch: 25W / 30W / 34W
Lumen Output	2500-2540 / 3125-3175 / 3750-3810	3125-3175 / 3750-3810 / 4250-4318
Certifications	DLC, UL 1598C	DLC, UL 1598C
Dimensions	23.8" x 23.8"	47.8" x 23.8"
Driver	NZUSA External	NZUSA External
Grounded	YES	YES
Housing Color	White	White
Warranty	7 Years	7 Years
L70 Lifetime	>100K Hours	>100K Hours
Input Voltage	AC120-277V	AC120-277V
Operating Temp.	-4°F TO 122°F	-4°F TO 122°F
IP Rating	IP60	IP60
0-10V Dimmable	YES	YES
User-Tunable	Dual Switching: CCT, Input Power	Dual Switching: CCT, Input Power
Controls Compatible	YES	YES
Dark Sky Compliant	—	—
Accessories	—	—
Options	—	—
Ordering Notes	—	—

CERTIFICATIONS

	NZLED® 3230.2	NZLED® 3434.2
DLC Model No.	NZ-3230.2-QQ	NZ-3434.2-QQ
DLC ID	PLXE62XUMNK5	PLYTOZIEQVAF
UL No.	E491844	E491844

SERIES PRODUCTS



Part Number	0325	0345	0445
Description	30W 2' 5yr Lensed Retrofit Strip Kit	30W 4' 5yr Lensed Retrofit Strip Kit	40W 4' 5yr Lensed Retrofit Strip Kit
Type	Magnetic Retrofit	Magnetic Retrofit	Magnetic Retrofit
Applications	2x2 Interior	2x4 Interior	2x4 Interior
CCT	4000K, 5000K	4000K, 5000K	4000K, 5000K
Input Power	30W	30W	40W
Lumen Output	3166	3462	4580
Certifications	DLC, ETL	DLC, ETL	DLC, ETL
Dimensions	24"	48"	48"
Driver	NZUSA External	NZUSA External	NZUSA External
Grounded	YES	YES	YES
Housing Color	—	—	—
Warranty	5 Years	5 Years	5 Years
L70 Lifetime	>100K Hours	>100K Hours	>100K Hours
Input Voltage	AC100-277V	AC100-277V	AC100-277V
Operating Temp.	23°F TO 122°F	23°F TO 122°F	23°F TO 122°F
IP Rating	IP64	IP64	IP64
0-10V Dimmable	YES	YES	YES
User-Tunable	—	—	—
Controls Compatible	YES	YES	YES
Dark Sky Compliant	—	—	—
Accessories	0302, 0304, 0034	0302, 0304, 0036	0302, 0304, 0038
Options	—	—	—
Ordering Notes	Specify desired CCT at time of order.	Specify desired CCT at time of order.	Specify desired CCT at time of order.

CERTIFICATIONS

	NZLED® 0325	NZLED® 0345	NZLED® 0445
DLC Model No.	NZ-LT-2*2-2-230-X2Y1	NZ-LT-2*4-4-230-X2Y1	NZ-LT-2*4-4-240-X2Y1
DLC ID	PNZVH268, PRZANK61	PZPQ46N9, P5EJ7CN1	PSEKFXNQ, PY2DWB6B
ETL No.	5006786	5006786	5006786

SERIES PRODUCTS




Part Number	NZLED® 0327	NZLED® 0347	NZLED® 0447
Description	30W 2' 7yr Lensed Retrofit Strip Kit	30W 4' 7yr Lensed Retrofit Strip Kit	40W 4' 7yr Lensed Retrofit Strip Kit
Type	Magnetic Retrofit	Magnetic Retrofit	Magnetic Retrofit
Applications	2x2 Interior	2x4 Interior	2x4 Interior
CCT	4000K, 5000K	4000K, 5000K	4000K, 5000K
Input Power	30W	30W	40W
Lumen Output	3113	3337	4397
Certifications	DLC, ETL	DLC, ETL	DLC, ETL
Dimensions	24"	48"	48"
Driver	NZUSA External	NZUSA External	NZUSA External
Grounded	YES	YES	YES
Housing Color	—	—	—
Warranty	7 Years	7 Years	7 Years
L70 Lifetime	>100K Hours	>100K Hours	>100K Hours
Input Voltage	AC100-277V	AC100-277V	AC100-277V
Operating Temp.	23°F TO 122°F	23°F TO 122°F	23°F TO 122°F
IP Rating	IP67	IP67	IP67
0-10V Dimmable	YES	YES	YES
User-Tunable	—	—	—
Controls Compatible	YES	YES	YES
Dark Sky Compliant	—	—	—
Accessories	0302, 0304, 0035	0302, 0304, 0037	0302, 0304, 0039
Options	—	—	—
Ordering Notes	Specify desired CCT at time of order.	Specify desired CCT at time of order.	Specify desired CCT at time of order.

CERTIFICATIONS

	NZLED® 0327	NZLED® 0347	NZLED® 0447
DLC Model No.	NZ-LT-2*2-2-230-X2Y2	NZ-LT-2*4-4-230-X2Y2	NZ-LT-2*4-4-240-X2Y2
DLC ID	PC9CQSYV, PN5WTWMA	PGKR1RPJ, PW27Z1XJ	PT6G24U3, PBXEX71P
ETL No.	5006786	5006786	5006786



SERIES ACCESSORIES

	ACC 0302-4/5	ACC 0304-4/5	ACC 0031, 0032, 0033, 0034
			
Part Number	0302-4/5	0304-4/5	0031, 0032, 0033, 0034
Description	2' Lensed Retrofit Single Strip Adder	4' Lensed Retrofit Single Strip Adder	Pig Tail, 2, 3, 4 Leg Whip Connector
Fits Products	0325, 0345, 0327, 0347, 0445, 0447	0325, 0345, 0327, 0347, 0445, 0447	0325, 0345, 0327, 0347, 0445, 0447
Ordering Notes	Specify desired CCT at time of order.	Specify desired CCT at time of order.	Specify whip count at time of order.

SERIES PRODUCTS



	NZLED® 9822	NZLED® 9834
Part Number	9822	9834
Description	20W Strip Kit	30W Strip Kit
Type	Retrofit	Retrofit
Applications	2x2, 2x4 Interior	2x2, 2x4 Interior
CCT	3500K, 4000K, 5000K	3500K, 4000K, 5000K
Input Power	20W	30W
Lumen Output	2044-2814	2814-3318
Certifications	DLC, UL 1598C	DLC, UL 1598C
Dimensions	24"	24"
Driver	NZUSA External	NZUSA External
Grounded	YES	YES
Housing Color	—	—
Warranty	10 Years	10 Years
L70 Lifetime	>100K Hours	>100K Hours
Input Voltage	AC100-277V	AC100-277V
Operating Temp.	23°F TO 122°F	23°F TO 122°F
IP Rating	IP67	IP67
0-10V Dimmable	—	—
User-Tunable	—	—
Controls Compatible	YES	YES
Dark Sky Compliant	—	—
Accessories	9290, 9291, 9292, 9293, 9294	9290, 9291, 9292, 9293, 9294
Options	—	—
Ordering Notes	—	—

CERTIFICATIONS

	NZLED® 9822	NZLED® 9834
DLC Model No.	NZ-20-9822	NZ-30-9834
DLC ID	PHFTW2FV, P5S9H5HF, P9CTAH9U, P4PZEJG7, P93PSW6R, P9EYAVNT	PVBK7AS2, PU9XBN4T, PX3SW142, P44CECXZ, PM4SFB1R, P9XAP1X6, PFXMZ57Q
UL No.	E466556	E466556

SERIES PRODUCTS

	NZLED® 9844	NZLED® 9844-D
Part Number	9844	9844D
Description	40W Strip Kit	40W Strip Kit Dimmable
Type	Retrofit	Retrofit
Applications	2x2, 2x4 Interior	2x2, 2x4 Interior
CCT	3500K, 4000K, 5000K	3500K, 4000K, 5000K
Input Power	40W	40W
Lumen Output	3432-4544	4202-4454
Certifications	DLC, UL 1598C	DLC, UL 1598C
Dimensions	24"	24"
Driver	NZUSA External	NZUSA External
Grounded	YES	YES
Housing Color	—	—
Warranty	10 Years	10 Years
L70 Lifetime	>100K Hours	>100K Hours
Input Voltage	AC100-277V	AC100-277V
Operating Temp.	23°F TO 122°F	23°F TO 122°F
IP Rating	IP67	IP67
0-10V Dimmable	—	YES
User-Tunable	—	—
Controls Compatible	YES	YES
Dark Sky Compliant	—	—
Accessories	9290, 9291, 9292, 9293, 9295	9290, 9291, 9292, 9293, 9296
Options	—	—
Ordering Notes	—	—

CERTIFICATIONS

	NZLED® 9844	NZLED® 9844-D
DLC Model No.	NZ-40-9844	NZ-40D-9844
DLC ID	PA4WF3B4, PSZMC5UQ, P9F57K2K, P1VNQFKS, PWMYYMRA, P3PWM45, PAM6XH5X, P7YD7HJF, PPSHXHXJ	PQ3FTUJ8, PXUECXSA, PQAJNVA
UL No.	E466556	E466556

SERIES PRODUCTS


	NZLED® 9844-IO	NZLED® 9866
Part Number	9844I/O	9866
Description	40W Strip Kit In/Outboard	60W Strip Kit (6 Strip)
Type	Retrofit	Retrofit
Applications	2x2, 2x4 Interior	2x2, 2x4 Interior
CCT	3500K, 4000K, 5000K	3500K, 4000K, 5000K
Input Power	40W	60W
Lumen Output	4120-4280	6241-6615
Certifications	DLC, UL 1598C	DLC, UL 1598C
Dimensions	24"	24"
Driver	NZUSA External	NZUSA External
Grounded	YES	YES
Housing Color	—	—
Warranty	10 Years	10 Years
L70 Lifetime	>100K Hours	>100K Hours
Input Voltage	AC100-277V	AC100-277V
Operating Temp.	23°F TO 122°F	23°F TO 122°F
IP Rating	IP67	IP67
0-10V Dimmable	—	—
User-Tunable	—	—
Controls Compatible	YES	YES
Dark Sky Compliant	—	—
Accessories	9290, 9291, 9292, 9293, 9297	9290, 9291, 9292, 9293, 9298
Options	—	Product available in 8-strip configuration, Part No. 9868
Ordering Notes	Product will be shipped as (2) 9822 kits.	—

CERTIFICATIONS

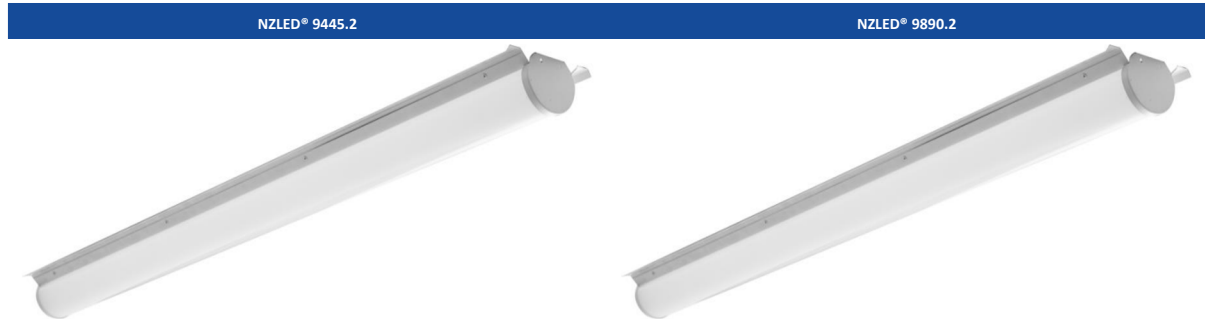
	NZLED® 9844-IO	NZLED® 9866
DLC Model No.	*Use 9822 (x2)	NZ-60-9866
DLC ID	*Use 9822 (x2)	PJRX1GYC, PZVYSJEU, PHGC8S49
UL No.	E466556	E466556

SERIES ACCESSORIES

	ACC 9290	ACC 9291	ACC 9292
			
Part Number	9290	9291	9292
Description	46.5" Strip Kit Curved Diffuser	2 Strip Adder	2' X 4' Strip Kit Diffuser
Fits Products	9834, 9844, 9844-D, 9844-IO, 9866, 9868	9834, 9844, 9844-D, 9844-IO, 9866, 9869	9834, 9844, 9844-D, 9844-IO, 9866, 9870
Ordering Notes	—	Available in 3500K, 4000K, 5000K	—

	ACC 9293	ACC 9294
		
Part Number	9293	9294
Description	Strip Kit Switch Base	Strip Kit Parts Kit
Fits Products	9834, 9844, 9844-D, 9844-IO, 9866, 9871	9834, 9844, 9844-D, 9844-IO, 9866, 9872
Ordering Notes	—	—

SERIES PRODUCTS



	NZLED® 9445.2	NZLED® 9890.2
Part Number	NZ-9445.2-QQ	NZ-9890.2-QQ
Description	Dual 3-Way Switching 4' Retrofit Shop Light	Dual 3-Way Switching 8' Retrofit Shop Light
Type	Retrofit	Retrofit
Applications	4' Linear Interior	8' Linear Interior
CCT	3500 / 4000 / 5000K	3500 / 4000 / 5000K
Input Power	34W / 38W / 45W	65W / 75W / 90W
Lumen Output	4624-5940	8840-11,880
Certifications	DLC, UL 1598C	DLC, UL 1598C
Dimensions	48.35" x 5.76" x 2.36"	96.7" x 5.76" x 2.36"
Driver	NZUSA External	NZUSA External
Grounded	YES	YES
Housing Color	White	White
Warranty	7 Years	7 Years
L70 Lifetime	>100K Hours	>100K Hours
Input Voltage	AC120-277V	AC120-277V
Operating Temp.	-4°F TO 122°F	-4°F TO 122°F
IP Rating	IP61	IP61
0-10V Dimmable	YES	YES
User-Tunable	—	—
Controls Compatible	YES	YES
Dark Sky Compliant	—	—
Accessories	—	—
Options	—	—
Ordering Notes	—	—

CERTIFICATIONS

	NZLED® 9445.2	NZLED® 9890.2
DLC Model No.	NZ-9445-QQ	NZ-9890-QQ
DLC ID	PL64P444TOXB	PL0DC8G4MFRL
UL No.	E491905	E491906



SERIES PRODUCTS



	NZLED® 9432	NZLED® 9865
Part Number	NZ-9432	NZ-9865
Description	32W 4' Retrofit Shop Light	65W 8' Retrofit Shop Light
Type	Retrofit	Retrofit
Applications	4' Linear Interior	8' Linear Interior
CCT	5000K	5000K
Input Power	32W	65W
Lumen Output	4288	8580
Certifications	DLC, UL 1598C	DLC, UL 1598C
Dimensions	48.35" x 5.76" x 2.36"	96.7" x 5.76" x 2.36"
Driver	NZUSA External	NZUSA External
Grounded	YES	YES
Housing Color	White	White
Warranty	5 Years	5 Years
L70 Lifetime	>100K Hours	>100K Hours
Input Voltage	AC120-277V	AC120-277V
Operating Temp.	-4°F TO 122°F	-4°F TO 122°F
IP Rating	IP61	IP61
0-10V Dimmable	YES	YES
User-Tunable	—	—
Controls Compatible	YES	YES
Dark Sky Compliant	—	—
Accessories	—	—
Options	—	—
Ordering Notes	—	—

CERTIFICATIONS

	NZLED® 9432	NZLED® 9865
DLC Model No.	NZ 9432 5000 Y	NZ 9865 5000 Y
DLC ID	PL36YF6URFZY	PLNDYPKCMXK5
UL No.	E491905	E491906

SERIES PRODUCTS



	NZLED® 9081	NZLED® 9110.4	NZLED® 9160.4
Part Number	NZ-9080.43	NZ-9110.4	NZ-9160.4
Description	80W Low Bay	105W Mid Bay	155W Mid / High Bay
Type	Replacement	Replacement	Replacement
Applications	Low Bay Interior	Mid Bay Interior	Mid/High Bay Interior
CCT	5000K	5000K	5000K
Input Power	80W	105W	155W
Lumen Output	10113	13755	21222
Certifications	DLC, UL 1598C	DLC, UL 1598C	DLC, UL 1598C
Dimensions	23.82" x 12.6" x 2.2"	24.8" x 14.96" x 2.16"	24.8" x 14.96" x 2.16"
Driver	NZUSA External	NZUSA External	NZUSA External
Grounded	YES	YES	YES
Housing Color	White	White	White
Warranty	7 Years	7 Years	7 Years
L70 Lifetime	>100K Hours	>100K Hours	>100K Hours
Input Voltage	AC120-277V	AC120-277V	AC120-277V
Operating Temp.	-4°F TO 104°F	-4°F TO 104°F	-4°F TO 104°F
IP Rating	IP61	IP61	IP61
0-10V Dimmable	YES	YES	YES
User-Tunable	—	—	—
Controls Compatible	YES	YES	YES
Dark Sky Compliant	—	—	—
Accessories	9081-WC, 9000-PM	9110-FM, 9110-WC, 9000-PM	9160-FM, 9160-WC, 9000-PM
Options	—	—	—
Ordering Notes	—	—	—

CERTIFICATIONS

	NZLED® 9081	NZLED® 9110.4	NZLED® 9160.4
DLC Model No.	NZ-9080.43 5000K	NZ 9110.3 5000 Y	NZ 9160.3 5000 Y
DLC ID	PMPDZSP	PLZ3OMXCFOKV	PL5572BW0YIC
ETL No.	E498108	E498108	E498108

SERIES PRODUCTS

NZLED® 9220.4



NZLED® 9321.4

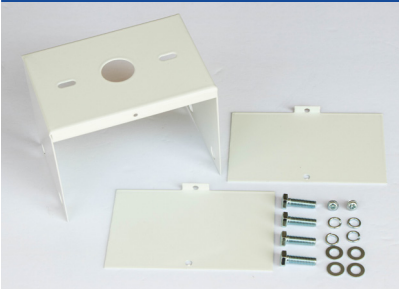
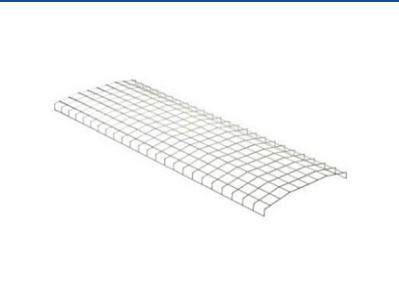


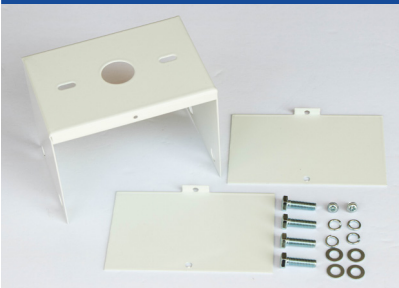
Part Number	NZ-9220.4	NZ-9321.4
Description	210W High Bay	300W High Bay
Type	Replacement	Replacement
Applications	High Bay Interior	High Bay Interior
CCT	5000K	5000K
Input Power	210W	300W
Lumen Output	28165	33600
Certifications	DLC, UL 1598C	DLC, UL 1598C
Dimensions	24.8" x 18.9" x 2.16"	46.5" x 14.96" x 2.16"
Driver	NZUSA External	NZUSA External
Grounded	YES	YES
Housing Color	White	White
Warranty	7 Years	7 Years
L70 Lifetime	>100K Hours	>100K Hours
Input Voltage	AC120-277V	AC120-277V
Operating Temp.	-4°F TO 104°F	-4°F TO 104°F
IP Rating	IP61	IP61
0-10V Dimmable	YES	YES
User-Tunable	—	—
Controls Compatible	YES	YES
Dark Sky Compliant	—	—
Accessories	9220-FM, 9220-WC, 9000-PM	9321-FM, 9321-WC, 9000-PM
Options	—	—
Ordering Notes	—	—

CERTIFICATIONS

	NZLED® 9220.4	NZLED® 9321.4
DLC Model No.	NZ 9220.3 5000 Y	NZ 9320 5000K
DLC ID	PLH9VO6FX2WU	PGVN5PJN
UL No.	E498108	E498108

SERIES ACCESSORIES

	ACC 9000.3-PM	ACC 9000.3-SMK	ACC 9081/9110/9160/9220/9321-WC
			
Part Number	9000.3-PM	9000.3-SMK	9081/9110/9160/9220/9321-WC
Description	Universal High Bay Pendant Mount	Universal High Bay Surface Mount	Low & High Bay Wire Cages
Fits Products	9110, 9160.3, 9220.4, 9321.4	ALL	ALL
Ordering Notes	-	-	-

	ACC 9081-PM	ACC 9000.3/4-OS
		
Part Number	9081-PM	9000.3/4-OS
Description	80W Low Bay Pendant Mount	Universal High Bay Occ Sensor
Fits Products	9081	ALL
Ordering Notes	-	-

SERIES PRODUCTS

NZLED® 3364-C



NZLED® 3384.1



Part Number	TP-4FT-36-DNA	NZ-3384.1
Description	36W 4' Vapor Tight (Dust Tight)	38W 4' Vapor Tight (Water Tight)
Type	Replacement	Replacement
Applications	Linear Interior	Linear Interior/Exterior
CCT	5000K	5000K
Input Power	36W	38W
Lumen Output	4524.48	4940
Certifications	DLC, UL1598C	DLC, UL1598C
Dimensions	47.24" x 3.7" x 2.36"	47.24" x 3.7" x 2.36"
Driver	NZUSA Internal	NZUSA Internal
Grounded	YES	YES
Housing Color	White	White
Warranty	5 Years	5 Years
L70 Lifetime	>100K Hours	>100K Hours
Input Voltage	AC90-305V	AC120-277V
Operating Temp.	-13°F TO 104°F	-13°F TO 104°F
IP Rating	IP61	IP65
0-10V Dimmable	YES	YES
User-Tunable	—	—
Controls Compatible	YES	YES
Dark Sky Compliant	—	—
Accessories	—	—
Options	—	—
Ordering Notes	—	—

CERTIFICATIONS

	NZLED® 3364-C	NZLED® 3384.1
DLC Model No.	NZ-336450K-D	NZ-3384.1 Y
DLC ID	PRUPM4ZE	PLUG2JTRIABO
UL No.	E498108	E498108

SERIES PRODUCTS

NZLED® 6166.3



NZLED® 6228.3



Part Number	NZ-6166.3	NZ-6228.3
Description	Dual 3-Way Switching 6" Downlight	Dual 3-Way Switching 8" Downlight
Type	Retrofit	Retrofit
Applications	Indoor Luminaires	Indoor Luminaires
CCT	Onboard 3-Way Switch: 3000K / 4000K / 5000K	Onboard 3-Way Switch: 3000K / 4000K / 5000K
Input Power	Onboard 3-Way Switch: 8W / 12W / 16W	Onboard 3-Way Switch: 12W / 16W / 22W
Lumen Output	~800-1600	~1200-2200
Certifications	Energy Star, ETL	Energy Star, ETL
Dimensions	8-5/16" x 4-3/8"	10-5/16" x 4-7/8"
Driver	NZUSA	NZUSA
Grounded	YES	YES
Housing Color	White	White
Warranty	5 Years	5 Years
L70 Lifetime	>100K Hours	>100K Hours
Input Voltage	120-277VAC	120-277VAC
Operating Temp.	-20°C ~65°C	-20°C ~65°C
IP Rating	Wet Locations (UL 1598)	Wet Locations (UL 1598)
0-10V Dimmable	0-10V	0-10V
User-Tunable	CCT, Input Power	CCT, Input Power
Controls Compatible	—	—
Dark Sky Compliant	YES	YES
Accessories	6" Goof Ring, 6000-R6	8" Goof Ring, 6000-R8
Options	—	—
Ordering Notes	—	—

CERTIFICATIONS

	NZLED® 6166.3	NZLED® 6228.3
ETL No.	5006786	5006786
Energy Star No.	2389650	2389658

SERIES PRODUCTS

	NZLED® 6156.2	NZLED® 6158.2
		
Part Number	6156.2	6158.2
Description	15W 6" Down Light	15W 8" Down Light
Type	Retrofit	Retrofit
Applications	6 Inch Interior	8 Inch Interior
CCT	4000K	4000K
Input Power	15W	15W
Lumen Output	1215	1230
Certifications	Energy Star, UL 1598C	Energy Star, UL 1598C
Dimensions	7.6" x 5.45"	9.2" x 6.05"
Driver	NZUSA External	NZUSA External
Grounded	YES	YES
Housing Color	Silver	Silver
Warranty	5 Years	5 Years
L70 Lifetime	>100K Hours	>100K Hours
Input Voltage	AC120-347V	AC120-347V
Operating Temp.	-4°F TO 122°F	-4°F TO 122°F
IP Rating	IP30	IP30
0-10V Dimmable	YES	YES
User-Tunable	—	—
Controls Compatible	YES	YES
Dark Sky Compliant	—	—
Accessories	—	—
Options	—	—
Ordering Notes	Fits 6" min to 7.5" max diameters.	Fits 7.4" min to 8.9" max diameters.

CERTIFICATIONS

	NZLED® 6156.2	NZLED® 6158.2
UL No.	E491844	E491844
Energy Star No.	CS23305	CS23305

SERIES PRODUCTS

	NZLED® 6156	NZLED® 6258
		
Part Number	NZ-61564000	NZ-6258 4000
Description	15W 6" Down Light (120V)	25W 8" Down Light (120V)
Type	Retrofit	Retrofit
Applications	6 Inch Interior	8 Inch Interior
CCT	4000K	4000K
Input Power	15W	25W
Lumen Output	1050	1700
Certifications	Energy Star, UL 1598C	Energy Star, UL 1598C
Dimensions	7.32" x 4.69"	7.72" x 5.25"
Driver	NZUSA External	NZUSA External
Grounded	YES	YES
Housing Color	White	White
Warranty	5 Years	5 Years
L70 Lifetime	>100K Hours	>100K Hours
Input Voltage	AC120V	AC120V
Operating Temp.	-4°F TO 122°F	-4°F TO 122°F
IP Rating	IP30	IP30
0-10V Dimmable	YES	—
User-Tunable	—	—
Controls Compatible	—	—
Dark Sky Compliant	—	—
Accessories	—	—
Options	—	—
Ordering Notes	Use only for 120V applications.	Use only for 120V applications.

CERTIFICATIONS

	NZLED® 6156	NZLED® 6258
UL No.	E491844	E491844
Energy Star No.	CS23305	CS23305



SERIES ACCESSORIES

	ACC 6000-R6	ACC 6000-R8
		
Part Number	6000-R6	6000-R8
Description	6" Goof Ring	8" Goof Ring
Fits Products	6166.3	6228.3
Ordering Notes	-	-

SERIES PRODUCTS

	NZLED® 2750.2	NZLED® 4150-F
		
Part Number	NZ-2750.6-CHDA1	4150-F
Description	50W CCT-Switchable Ground-Mount Flood Light	150W Multi-Mount Flood Light
Type	Replacement / New Construction	Replacement
Applications	Exterior Flood	Exterior Flood / Parking
CCT	3000K / 4000K / 5000K	5000K
Input Power	50W	150W
Lumen Output	7048	19819
Certifications	DLC, UL 1598C	DLC, UL 1598C
Dimensions	10.2" x 8.5" x 2.1"	13.1" x 20.2" x 3.2"
Driver	NZUSA	Meanwell Internal
Grounded	YES	YES
Housing Color	Brown	Brown
Warranty	5 Years	5 Years
L70 Lifetime	>100K Hours	>100K Hours
Input Voltage	AC100-277V	AC100-277V
Operating Temp.	-4°F TO 113°F	-4°F TO 113°F
IP Rating	IP65	IP65
0-10V Dimmable	—	YES
User-Tunable	CCT	—
Controls Compatible	—	—
Dark Sky Compliant	—	—
Accessories	—	4000-PC
Options	—	Photocell add-on: 4000-PC
Ordering Notes	—	Includes 4000-FM Flood Mount

CERTIFICATIONS

	NZLED® 2750.2	NZLED® 4150-F
DLC Model No.	NZ-2750.6-CHDA1	NZ-4150.7WCT3B1-50
DLC ID	PLZUFZ1QI4E3	PLPHBRJYI7T2
UL No.	E498108	E498108

SERIES PRODUCTS

NZLED® 4150.8



NZLED® 4185.10



Part Number	NZ-4150.8-CT3A2-BR10SPA&D50	NZ-4185.10-50L01DM1
Description	150W Multi-Mount Area Light	Wattage-Switchable Area Light
Type	Replacement / New Construction	Replacement / New Construction
Applications	Exterior Flood / Parking	Exterior Flood / Parking
CCT	5000K	5000K
Input Power	150W	150W / 185W / 200W
Lumen Output	21000	19500 / 24050 / 26000
Certifications	DLC, UL 1598C	DLC, ETL
Dimensions	13.1" x 20.2" x 3.2"	13.1" x 27" x 3.5"
Driver	Meanwell	NZUSA
Grounded	YES	YES
Housing Color	Brown	Brown
Warranty	5 Years	5 Years
L70 Lifetime	>100K Hours	>100K Hours
Input Voltage	AC100-277V	AC100-277V
Operating Temp.	-4°F TO 113°F	-4°F TO 113°F
IP Rating	IP65	IP65
0-10V Dimmable	YES	YES
User-Tunable	—	—
Controls Compatible	—	—
Dark Sky Compliant	—	—
Accessories	4150-FM, 4000-PC	—
Options	—	—
Ordering Notes	Includes AM/DM mount, others available separately	Includes 4185-DM mount

CERTIFICATIONS

	NZLED® 4150.8	NZLED® 4185.10
DLC Model No.	NZ-4150.8-CT3A2-abcdef	NZ-4185.10-50L01DM1
DLC ID	PL6OCUD61ZRM	REGISTERED
UL No.	E498108	—
ETL No.	—	500786

SERIES PRODUCTS

	NZLED® 4200.8	NZLED® 4300.7
		
Part Number	NZ-4200.8-CT3A2-BR10SPA&D50	NZ-4300.7WCT3B1-BRSA&D50
Description	200W Multi-Mount Area Light	300W Multi-Mount Area Light
Type	Replacement / New Construction	Replacement / New Construction
Applications	Exterior Flood / Parking	Exterior Flood / Parking
CCT	5000K	5000K
Input Power	200W	300W
Lumen Output	26819	38852
Certifications	DLC, UL 1598C	DLC, UL 1598C
Dimensions	13.1" x 27" x 3.5"	13.1" x 27" x 3.5"
Driver	Meanwell	Meanwell
Grounded	YES	YES
Housing Color	Brown	Brown
Warranty	5 Years	5 Years
L70 Lifetime	>100K Hours	>100K Hours
Input Voltage	AC100-277V	AC100-277V
Operating Temp.	-4°F TO 113°F	-4°F TO 113°F
IP Rating	IP65	IP65
0-10V Dimmable	YES	YES
User-Tunable	–	–
Controls Compatible	–	–
Dark Sky Compliant	–	–
Accessories	4200-FM, 4000-PC	4300-FM, 4000-PC
Options	–	–
Ordering Notes	Includes AM/DM mount, others available separately	Includes AM/DM mount, others available separately

CERTIFICATIONS

	NZLED® 4200.8	NZLED® 4300.7
DLC Model No.	NZ-4200.8-CT3A2-abcdef	NZ-4300.7WCT3B1-50
DLC ID	PL7S9JLD32VC	PLO1E0EB432V
UL No.	E498108	E498108

SERIES ACCESSORIES

	ACC 4000-FM	ACC 4185-DM	ACC 4000-AM/DM
Part Number	NZ-4150/4200/4300-FM	NZ-4185-DM	NZ-4000-AM/DM
Description	Flood Light Mount	Area Light Direct Mount	Area Light Universal Arm / Direct Mount
Fits Products	4150.8, 4200.8, 4300.7	4185.10	4150.8, 4200.8, 4300.7
Ordering Notes	Included with 4150-F Flood Light	Included with 4185.10 Area Light	Included with 4150.8, 4200.8, 4300.7 Area Lights

	ACC 4000-PC
Part Number	NZ-4000-PC
Description	Area Light / Flood Light Photo Cell
Fits Products	4150, 4200.8, 4300
Ordering Notes	—

SERIES PRODUCTS

NZLED® 40255.3



NZLED® 8150.3



Part Number	NZ-40255WASA2-WH50	NZ-8150.3JB-150WSAMA2-WH50
Description	55W Parking Garage Light	150W Canopy Light
Type	Replacement	Replacement
Applications	Interior / Exterior	Interior / Exterior
CCT	5000K	5000K
Input Power	55W	150W
Lumen Output	6416	15934
Certifications	DLC, UL 1598C	DLC, UL 1598C
Dimensions	9.49" x 9.49" x 3.74"	14.96" x 14.96" x 2.83"
Driver	NetZero USA	NetZero USA
Grounded	YES	YES
Housing Color	White	White
Warranty	5 Years	7 Years
L70 Lifetime	>100K Hours	>100K Hours
Input Voltage	AC100-277V	AC100-277V
Operating Temp.	-4°F TO 113°F	-4°F TO 113°F
IP Rating	IP65	IP65
0-10V Dimmable	-	-
User-Tunable	-	-
Controls Compatible	-	-
Dark Sky Compliant	-	-
Accessories	-	-
Options	-	-
Ordering Notes	-	-

CERTIFICATIONS

	NZLED® 40255.3	NZLED® 8150.3
DLC Model No.	NZ 40255XY 5K	NZ-8150 (5000K)
DLC ID	PLW96A967NGE	PF1F9E2W
UL No.	E498108	E498108

SERIES PRODUCTS

NZLED® 4060M.5



NZLED® 4100M.5



Part Number	NZ-4060M.5-HBSGDA1	NZ-4100M.5-DBSGDA1
Description	CCT Switchable 60W Wall Pack w/ Photocell	CCT Switchable 100W Wall Pack w/ Photocell
Type	New / Replacement	New / Replacement
Applications	Outdoor Luminaires: Mid Output	Outdoor Luminaires: High Output
CCT	Onboard 3-Way Switch: 3000K / 4000K / 5000K	Onboard 3-Way Switch: 3000K / 4000K / 5000K
Input Power	60W	100W
Lumen Output	8000 / 8700 / 8200	14400 / 15600 / 15000
Certifications	DLC, UL 1598C	DLC, UL 1598C
Dimensions	14.37"W x 9.33"H x 7.36"D	14.37"W x 9.33"H x 7.36"D
Driver	NZUSA	NZUSA
Grounded	YES	YES
Housing Color	Brown	Brown
Warranty	7 Years	7 Years
L70 Lifetime	>100K Hours	>100K Hours
Input Voltage	120-277VAC	120-277VAC
Operating Temp.	-40°F TO 122°F, Sensor:-13°F TO 122°F, Emergency: 32°F TO 104°F	-40°F TO 122°F, Sensor:-13°F TO 122°F, Emergency: 32°F TO 104°F
IP Rating	IP65	IP65
0-10V Dimmable	YES	YES
User-Tunable	CCT - 3000K / 4000K / 5000K	CCT - 3000K / 4000K / 5000K
Controls Compatible	-	-
Dark Sky Compliant	-	-
Accessories	-	-
Options	-	-
Ordering Notes	-	-

CERTIFICATIONS

	NZLED® 4060M.5	NZLED® 4100M.5
DLC Model No.	NZ-4060M.5-HBSGDA1-abcefg	NZ-4100M.5-DBSGDA1-abce
DLC ID	PLWSP94R6FHI	PLRIBS7JS425
UL No.	E498108	E498108

SERIES PRODUCTS

NZLED® 4060.1-DS

NZLED® 4100.1-DS



Part Number	NZ-4060.1.DS-D4CYT3DA1	NZ-4100.1.DS-DSCYT3DA1
Description	CCT Switchable 60W Full Cutoff Wall Pack w/ Photocell	CCT Switchable 100W Full Cutoff Wall Pack w/ Photocell
Type	Replacement / New Construction	Replacement / New Construction
Applications	Exterior Dark Sky	Exterior Dark Sky
CCT	Onboard 3-Way Switch: 3000K / 4000K / 5000K	Onboard 3-Way Switch: 3000K / 4000K / 5000K
Input Power	60W	100W
Lumen Output	7620	4880 / 5680 / 5040
Certifications	DLC, UL 1598C	DLC, UL 1598C
Dimensions	14.17" x 9.25" x 6.54"	14.17" x 9.65" x 9.25"
Driver	NZUSA Internal	NZUSA Internal
Grounded	YES	YES
Housing Color	Brown	Brown
Warranty	7 Years	7 Years
L70 Lifetime	>100K Hours	>100K Hours
Input Voltage	AC100-277V	AC100-277V
Operating Temp.	-4°F TO 113°F	-4°F TO 113°F
IP Rating	IP65	IP65
0-10V Dimmable	-	-
User-Tunable	CCT - 3000K / 4000K / 5000K	CCT - 3000K / 4000K / 5000K
Controls Compatible	-	-
Dark Sky Compliant	YES	YES
Accessories	-	-
Options	-	-
Ordering Notes	-	-

CERTIFICATIONS

	NZLED® 4060.1-DS	NZLED® 4100.1-DS
DLC Model No.	NZ-4060.1DS-D4CYT3DA1-abcdegh	NZ-4100.1DS
DLC ID	PLNS5ZB1GYAC	REGISTERED
UL No.	E498108	E498108

SERIES PRODUCTS

NZLED® 4020.2



NZLED® 4060.1-R



Part Number	NZ-4020WBFA2-BRP50	NZ-4060.1.RW1CYT1DA2
Description	20W Mini Wall Pack w/ Photocell	CCT Switchable 60W Rotating Wall Pack w/ Photocell
Type	Replacement / New Construction	Replacement / New Construction
Applications	Exterior	Exterior
CCT	5000K	Onboard 3-Way Switch: 3000K / 4000K / 5000K
Input Power	20W	60W
Lumen Output	2147	7200-7500
Certifications	DLC, UL 1598C	DLC, UL 1598C
Dimensions	8.58" x 5.79" x 2.91"	9.13" x 8.86" x 5.2"
Driver	NZUSA Internal	NZUSA Internal
Grounded	YES	YES
Housing Color	Brown	Brown
Warranty	7 Years	7 Years
L70 Lifetime	>100K Hours	>100K Hours
Input Voltage	AC100-277V	AC100-277V
Operating Temp.	-4°F TO 113°F	-4°F TO 113°F
IP Rating	IP65	IP61
0-10V Dimmable	-	-
User-Tunable	-	CCT - 3000K / 4000K / 5000K
Controls Compatible	-	-
Dark Sky Compliant	-	-
Accessories	-	4060-R.1P
Options	-	-
Ordering Notes	-	-

CERTIFICATIONS

	NZLED® 4020.2	NZLED® 4060.1-R
DLC Model No.	NZ-4020WBFA2-BRP50	NZ-4060.1R-W1CYT1DA2-abcef
DLC ID	REGISTERED	PL1TWOLHQQ9P
UL No.	E498108	E498108



SERIES ACCESSORIES

ACC 4060-R.1P



Part Number	4060-R.1P
Description	Rotating Wallpack Mounting Plate
Fits Products	4060.1-R
Ordering Notes	-

SERIES PRODUCTS

NZLED® 6009

NZLED® 6030



Part Number	2373	2330
Description	9W Edison Base Cobb Light	30W Mogul Base Cobb Light
Type	Retrofit	Retrofit
Applications	Various Interior / Exterior	Various Interior / Exterior
CCT	5000K	5000K
Input Power	9W	30W
Lumen Output	1170	3400
Certifications	UL 1598C	UL 1598C
Dimensions	5.7" x 1.77"	9.06" x 3.66"
Driver	NetZero USA	NetZero USA
Grounded	YES	YES
Housing Color	—	—
Warranty	5 Years	5 Years
L70 Lifetime	>100K Hours	>100K Hours
Input Voltage	AC100-277V	AC100-277V
Operating Temp.	-4°F TO 113°F	-4°F TO 113°F
IP Rating	IP64	IP64
0-10V Dimmable	—	—
User-Tunable	—	—
Controls Compatible	—	—
Dark Sky Compliant	—	—
Accessories	—	—
Options	—	—
Ordering Notes	—	—

CERTIFICATIONS

	NZLED® 6009	NZLED® 6030
UL No.	E491906	E491906

SERIES PRODUCTS

NZLED® 6080

NZLED® 6100



Part Number	80w E39	100w E39
Description	80W Mogul Base Cobb Light	100W Mogul Base Cobb Light
Type	Retrofit	Retrofit
Applications	Various Interior / Exterior	Various Interior / Exterior
CCT	5000K	5000K
Input Power	80W	100W
Lumen Output	9400	11600
Certifications	UL 1598C	UL 1598C
Dimensions	9.06" x 3.66"	9.06" x 3.66"
Driver	NetZero USA	NetZero USA
Grounded	YES	YES
Housing Color	—	—
Warranty	5 Years	5 Years
L70 Lifetime	>100K Hours	>100K Hours
Input Voltage	AC100-277V	AC100-277V
Operating Temp.	-4°F TO 113°F	-4°F TO 113°F
IP Rating	IP64	IP64
0-10V Dimmable	—	—
User-Tunable	—	—
Controls Compatible	—	—
Dark Sky Compliant	—	—
Accessories	—	—
Options	—	—
Ordering Notes	—	—

CERTIFICATIONS

	NZLED® 6080	NZLED® 6100
UL No.	E491906	E491906

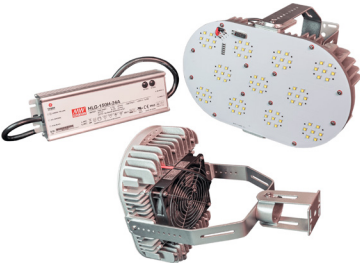


SERIES PRODUCTS

	NZLED® 9035	NZLED® 9080	NZLED® 9120
Part Number	NZ-9035	NZ-9080	NZ-9120
Description	35W HID Retrofit	80W HID Retrofit	120W HID Retrofit
Type	Retrofit	Retrofit	Retrofit
Applications	High Bay, Parking, Flood, Wallpack	High Bay, Parking, Flood, Wallpack	High Bay, Parking, Flood, Wallpack
CCT	5000K	5000K	5000K
Input Power	35W	80W	120W
Lumen Output	3629	8963	13690
Certifications	DLC, UL 1598C	DLC, UL 1598C	DLC, UL 1598C
Dimensions	(7.09-8.27)" x 5.2" x 5.12"	(9.25-11.22)" x 6.3" x (5.12-5.9)"	(9.25-11.22)" x 6.3" x (5.12-5.9)"
Driver	NZUSA External	NZUSA External	NZUSA External
Grounded	YES	YES	YES
Housing Color	—	—	—
Warranty	7 Years	7 Years	7 Years
L70 Lifetime	>100K Hrs	>100K Hrs	>100K Hrs
Input Voltage	AC100-277V	AC100-277V	AC100-277V
Operating Temp.	-4°F TO 131°F	-4°F TO 131°F	-4°F TO 131°F
IP Rating	IP40	IP40	IP40
0-10V Dimmable	—	—	—
User-Tunable	—	—	—
Controls Compatible	—	—	—
Dark Sky Compliant	—	—	—
Accessories	—	—	—
Options	—	—	—
Ordering Notes	—	—	—

CERTIFICATIONS

	NZLED® 9035	NZLED® 9080	NZLED® 9120
DLC Model No.	NZ-9035 (5000K)	NZ-9080 (5000K)	NZ-9120 (5000K)
DLC ID	P8PB4C36	PMFX6W2X, PSHT5HAV	P676FDA3, PZHW48Z
UL No.	E491905	E491905	E491905

SERIES PRODUCTS

	NZLED® 9150	NZLED® 9200	NZLED® 9300.2
			
Part Number	NZ-9150	NZ-9200	NZ-93005U
Description	150W HID Retrofit	200W HID Retrofit	300W HID Retrofit
Type	Retrofit	Retrofit	Retrofit
Applications	High Bay, Parking, Flood, Wallpack	High Bay, Parking, Flood, Wallpack	High Bay, Parking, Flood, Wallpack
CCT	5000K	5000K	5000K
Input Power	150W	200W	300W
Lumen Output	16790	22850	32390
Certifications	DLC, UL 1598C	DLC, UL 1598C	DLC, UL 1598C
Dimensions	(12.8-13.98)" x 7.17" x (5.12-6.3)"	(12.8-13.98)" x 7.17" x (5.12-6.3)"	(14.96-17.52)" x 10.24" x (5.12-6.3)"
Driver	NZUSA External	NZUSA External	NZUSA External
Grounded	YES	YES	YES
Housing Color	—	—	—
Warranty	7 Years	7 Years	7 Years
L70 Lifetime	>100K Hrs	>100K Hrs	>100K Hrs
Input Voltage	AC100-277V	AC100-277V	AC100-277V
Operating Temp.	-4°F TO 131°F	-4°F TO 131°F	-4°F TO 131°F
IP Rating	IP40	IP40	IP40
0-10V Dimmable	—	—	—
User-Tunable	—	—	—
Controls Compatible	—	—	—
Dark Sky Compliant	—	—	—
Accessories	—	—	—
Options	—	—	—
Ordering Notes	—	—	—

CERTIFICATIONS

	NZLED® 9150	NZLED® 9200	NZLED® 9300.2
DLC Model No.	NZ-9150 (5000K)	NZ-9200 (5000K)	—
DLC ID	PR81FYDX, P5QRB38C	PVQMWS7X, PSUMAH7K	—
UL No.	E491905	E491905	E491906

SERIES PRODUCTS

	NZLED® 5008	NZLED® 7001.1
		
Part Number	5008	7001.1
Description	Wall Mount Occupancy Sensor	Wall Switch Dimmer
Type	Wall Mounted	Wall Mounted
Applications	Interior	Interior
CCT	–	–
Certifications	ETL	UL
Dimensions	–	–
Driver	–	–
Grounded	–	–
Housing Color	–	–
Warranty	3 Years	3 Years
L70 Lifetime	–	–
Lumen Output	–	–
Input Power	–	–
Input Voltage	–	–
Operating Temp.	–	–
IP Rating	–	–
0-10V Dimmable	–	–
User-Tunable	–	–
Controls Compatible	–	–
Dark Sky Compliant	–	–
Accessories	–	–
Ordering Notes	–	–

CERTIFICATIONS

	NZLED® 5008	NZLED® 7001.1
DLC Model No.	–	–
DLC ID	–	–
UL No.	–	✓
ETL No.	✓	–
Energy Star No.	–	–

SERIES PRODUCTS

	NZLED® 9001	NZLED® 9001
		
Part Number	9001	9002
Description	Parallel Surge Suppression 120-347V	Parallel Surge Suppression 480V
Type	Surge Suppression	Surge Suppression
Applications	Interior / Exterior	Interior / Exterior
CCT	—	—
Certifications	UL	UL
Dimensions	—	—
Driver	—	—
Grounded	—	—
Housing Color	—	—
Warranty	3 Years	3 Years
L70 Lifetime	—	—
Lumen Output	—	—
Input Power	—	—
Input Voltage	—	—
Operating Temp.	—	—
IP Rating	—	—
0-10V Dimmable	—	—
User-Tunable	—	—
Controls Compatible	—	—
Dark Sky Compliant	—	—
Accessories	—	—
Ordering Notes	—	—

CERTIFICATIONS

	NZLED® 9001	NZLED® 9001
DLC Model No.	—	—
DLC ID	—	—
UL No.	✓	✓
ETL No.	—	—
Energy Star No.	—	—

SERIES PRODUCTS

NZLED® 4827



NZLED® 4827-38



Part Number	4827	4827.38
Description	250W 480V to 277V Step Down Transformer	380W 480V to 277V Step Down Transformer
Type	Transformer	Transformer
Applications	Interior / Exterior	Interior / Exterior
CCT	—	—
Certifications	UL	UL
Dimensions	—	—
Driver	—	—
Grounded	—	—
Housing Color	—	—
Warranty	3 Years	3 Years
L70 Lifetime	—	—
Lumen Output	—	—
Input Power	—	—
Input Voltage	—	—
Operating Temp.	—	—
IP Rating	—	—
0-10V Dimmable	—	—
User-Tunable	—	—
Controls Compatible	—	—
Dark Sky Compliant	—	—
Accessories	—	—
Ordering Notes	—	—

CERTIFICATIONS

	NZLED® 4827	NZLED® 4827-38
DLC Model No.	—	—
DLC ID	—	—
UL No.	✓	✓
ETL No.	—	—
Energy Star No.	—	—

SERIES PRODUCTS

	NZLED® 9111-8.3	NZLED® 9111-12	NZLED® 9111-25H
			
Part Number	9111.8.3	9111.12	9111.25H
Description	8W Troffer Emergency Battery Pack	12W High Bay / HID Emergency Battery Pack	25W High Bay / HID Emergency Battery Pack
Type	Battery	Battery	Battery
Applications	Interior	Interior	Interior
CCT	—	—	—
Certifications	ETL	ETL	ETL
Dimensions	—	—	—
Driver	—	—	—
Grounded	YES	YES	YES
Housing Color	—	—	—
Warranty	5 Years	5 Years	5 Years
L70 Lifetime	—	—	—
Lumen Output	—	—	—
Wattage	8W	12W	25W
Input Voltage	AC120-277V	AC120-277V	AC120-277V
Operating Temp.	>122°F	>122°F	>122°F
IP Rating	—	—	—
0-10V Dimmable	—	—	—
User-Tunable	—	—	—
Controls Compatible	—	—	—
Dark Sky Compliant	—	—	—
Accessories	—	—	—
Ordering Notes	—	—	—

CERTIFICATIONS

	NZLED® 9111-8.3	NZLED® 9111-12	NZLED® 9111-25H
DLC Model No.	—	—	—
DLC ID	—	—	—
UL No.	—	—	—
ETL No.	✓	✓	✓
Energy Star No.	—	—	—

SERIES PRODUCTS

	NZLED® 9008.1	NZLED® 9010.1	NZLED® 9006.1
			
Part Number	9008.1	9010.1	9006.1
Description	LED Exit Sign	LED Dual-Head Exit Emergency Combo	LED Dual-Head Emergency Light
Type	Replacement	Replacement	Replacement
Applications	Interior	Interior	Interior
CCT	–	–	–
Certifications	UL	UL	UL
Dimensions	–	–	–
Driver	–	–	–
Grounded	YES	YES	YES
Housing Color	White w/ Red Letters	White w/ Red Letters	White
Warranty	5 Years	5 Years	5 Years
L70 Lifetime	–	–	–
Lumen Output	–	–	–
Input Power	–	–	–
Input Voltage	AC120-277V	AC120-277V	AC120-277V
Operating Temp.	68°F TO 86°F	68°F TO 86°F	68°F TO 86°F
IP Rating	UL Listed for damp locations (0°C – 50°C)	UL Listed for damp locations (0°C – 40°C)	UL Listed for damp locations (0°C – 50°C)
0-10V Dimmable	–	9.6V long life, maintenance-free, rechargeable NiCd battery	3.6V long life, maintenance-free, rechargeable NiCd battery
User-Tunable	–	Minimum 90-minute emergency illumination	Minimum 90-minute emergency illumination
Controls Compatible	–	–	–
Dark Sky Compliant	–	–	–
Options	SDT: Self-diagnostic feature performs monthly, bi-annual, and annual tests to ensure reliable operation and meet electrical and life safety codes.	SDT: Self-diagnostic feature performs monthly, bi-annual, and annual tests to ensure reliable operation and meet electrical and life safety codes.	SDT: Self-diagnostic feature performs monthly, bi-annual, and annual tests to ensure reliable operation and meet electrical and life safety codes.
Ordering Notes	White with green lettering available by special order. SDT self-diagnostic feature available by special order.	SDT self-diagnostic feature available by special order.	SDT self-diagnostic feature available by special order.

CERTIFICATIONS

	NZLED® 9008.1	NZLED® 9010.1	NZLED® 9006.1
DLC Model No.	–	–	–
DLC ID	–	–	–
UL No.	✓	✓	✓
ETL No.	–	–	–
Energy Star No.	–	–	–

SERIES PRODUCTS

NZGUV® UR-140



Description	Germicidal 253.7 Non-Ionizing UV-C Upper-room Unit
Type	Disinfecting Luminaire
EPA Registration	Reg. No. 98440-DV-2, EST. No. 98440-GA-1
UV-C Wavelength	253.7 nm
Actinic Irradiance	16.8 mJ / m² per second at 200mm
Beam Angle	180° Horizontally, 35° Vertically
Input Voltage	120V 50/60Hz
Dimensions	48" W x 5" H x 8.6875" D
Weight	10 lbs
Operating Temp.	23°F TO 100°F
Power Cord	Hard-wired
Lamps	(1x) NetZero USA® 36W 253.7 nm quartz germicidal high intensity UVC lamp with aluminum end caps and G13 sockets
Housing	Lightweight aluminum with highly reflective interior for increased germicidal intensity
Warranty	5 Years (excluding bulbs)
On/Off Safety Switch	YES

PRODUCT APPROVALS

	NZGUV® UR-140
UL Safety Tested & Certified	✓
EPA Registered	✓
UL 153 Compliant	✓
CSA C22.2 #2520.4 Compliant	✓
Mil-Spec 461F	✓
RoHS Compliant, BAA Compliant	✓
FCC Compliant, Part 15 Class A	✓

SERIES PRODUCTS

NZGUV® HH-217



Description	Portable germicidal 253.7 Non-ionizing UV-C Handheld Unit
Type	Disinfecting Luminaire
EPA Registration	Reg. No. 98440-DV-1, EST. No. 98440-GA-1
UV-C Wavelength	253.7 nm
Actinic Irradiance	16.8 mJ / m² per second at 200mm
Input Voltage	120V 50/60Hz
Dimensions	24" x 8.625" x 8.5"
Weight	5 lbs
Operating Temp.	23°F TO 100°F
Power Cord	20 Ft, 3-Prong
Lamps	(2x) NetZero USA® 17W 253.7 nm quartz germicidal high intensity UVC lamps with aluminum end caps and G13 sockets
Housing	Lightweight aluminum with highly reflective interior for increased germicidal intensity
Warranty	5 Years (excluding bulbs)
On/Off Safety Switch	YES
Included PPE	1 Pair UV-C Gloves, 1 UV-C Face Shield, 1 UV-C Protective Suit

PRODUCT APPROVALS

NZGUV® HH-217

UL Safety Tested	✓
EPA Registered	✓
UL 153 Compliant	✓
CSA C22.2 #2520.4 Compliant	✓
Mil-Spec 461F	✓
RoHS Compliant, BAA Compliant	✓
FCC Compliant, Part 15 Class A	✓

SERIES PRODUCTS

NZGUV® DT-836



Description	8-Bulb Germicidal UV-C Portable Disinfecting Tower
Type	Disinfecting Luminaire
EPA Registration	Reg. No. 98440-DV-2, EST. No. 98440-GA-1
UV-C Wavelength	253.7 nm
Beam Angle	360°
Input Voltage	120V 50/60Hz
Operating Temp.	23°F TO 100°F
Power Cord	20' Power cord
Lamps	(8x) NetZero USA® 36W 253.7 nm quartz UV-C lamp
Lamp Rated Life	9000 hours
Housing	Steel construction
Warranty	5 Years (excluding bulbs)
Coverage Area	1000 sq. ft.
Motion Sensor Safety Cutoff	✓
Remote Control On/Off Switch	✓

PRODUCT APPROVALS

NZGUV® DT-836

Timer Control	✓
EPA Registered	✓
UL 153 Compliant	✓
CSA C22.2 #2520.4 Compliant	✓
RoHS Compliant, BAA Compliant	✓
FCC Compliant, Part 15 Class A	✓
FIFRA Compliant	✓

SERIES PRODUCTS

NZGUV® UVC-T8-17



NZGUV® UVC-T8-36



Description	2 ft 17W 253.7 nm quartz UV-C lamp	4 ft 36W 253.7 nm quartz UV-C lamp
Width	589mm	1199mm
Rated Power	17W	36W
Irradiation Intensity (uW/c m ²)	≥75	≥120
Current	280 mA	330 mA
Tube Voltage	94-104V	110-130V
Irradiation Intensity Duration - 1000h	≥88%	≥88%
Irradiation Intensity Duration - 2000h	≥82%	≥82%
Irradiation Intensity Duration - 5000h	≥70%	≥70%
Irradiation Intensity Duration - 8000h	≥50%	≥50%
Wavelength	253.7 nm	253.7 nm
Average Lifetime	≥9000 hours	≥9000 hours
Switching Life - ON/OFF: 45S/15S	Average>8000 / Single tube>6000. No black end in 1000 times.	Average>8000 / Single tube>6000. No black end in 1000 times.
Low Voltage Lifetime	Below 120V: More than 1000 hours lifetime, no black end in 300 hours.	Below 120V: More than 1000 hours lifetime, no black end in 300 hours.
Filament Type	9711	9711
Filament Cold Resistance	2.5±10% Ω	2.5±10% Ω
High Purity Mercury (99.9999%)	15mg	25mg
Aluminum Socket	G13	G13
Diameter (mm)	24.5+ -0.5mm T8	24.5+ -0.5mm T8
Tube Material	Quartz glass, hydroxy≤10, Non-Ozone	Quartz glass, hydroxy≤10, Non-Ozone

SERIES PRODUCTS

NZGUV® HH-PPP



Description	288Wh Portable Power Pack for NZGUV® UV-C Handheld Unit
Type	Portable Rechargeable Battery
Battery Capacity	12V 24 Ah 288Wh (3.7V, 78000 mAh)
Rated Power	350W
AC Input	AC:US-110V60Hz/EU-220V50Hz
Solar Input	12-18V (18V50-150W)
DC Output	12V12A
USB Output	5V2.1A x 4
Type-C Output	5V3A
Cigarette Port Output	12V
Output Waveform	Pure Sine Wave
Transient Response Time	5MS
Operation Temperature	-20°C~60°C
Multiple Protection	Short circuit, Over current, Over power, Over-discharge, Over charge
Dimensions	28.5 x 15 x 14 cm
Weight	9.9 lbs
Warranty	2 Years



Sales Support	National Key Accounts	<i>Danny Broadway</i>	danny.broadway@netzero-usa.com
	National Distribution Network	<i>Jeremy Smith</i>	jeremy.smith@netzero-usa.com
	National Channel Sales	<i>Mark Sennett</i>	mark.sennett@netzero-usa.com
Product Orders	Product Orders	<i>Submit to:</i>	orders@netzero-usa.com
Product Support	Marketing	<i>Anthony Meeks</i>	anthony.meeks@netzero-usa.com
	Account Management	<i>Laura Kaufenberg</i>	laura.k@netzero-usa.com
	Technical & Installation	<i>Jeffery Bell</i>	jeffb@netzero-usa.com
Operations Support	Operations	<i>Cheryl Flynn</i>	cheryl.flynn@netzero-usa.com
	Financing	<i>Amanda Howard</i>	amanda@netzero-usa.com
	Product RMA / Warranty	<i>Svetlana Zhavoronkova</i>	svetlana.z@netzero-usa.com
	Inventory, Shipping, Order Tracking	<i>Chip Amann</i>	chip@netzero-usa.com
Submission Emails	Inputs for Proposals	<i>Submit to:</i>	proposals@netzero-usa.com
	Lease Applications	<i>Submit to:</i>	nzfinancialdivision@netzero-usa.com
	Case Study Requests	<i>Submit to:</i>	cases@netzero-usa.com