

Rental Solutions Guide

All the gear you need

VERSION 6.0




HercRentals[®]

Call 888-777-2700 for rates and reservations
[HercRentals.com](https://www.HercRentals.com)



We equip our customers and communities to build a brighter future.

Herc Rentals® is one of the leading equipment rental suppliers with approximately 275 company-operated locations, principally in North America. With more than 50 years of experience, Herc Rentals is a full-line equipment rental supplier in key markets, including commercial and residential construction, industrial and manufacturing, civil infrastructure, automotive, government and municipalities, energy, remediation, emergency response, facilities, entertainment and agriculture, as well as refineries and petrochemicals. The equipment rental business is supported by ProSolutions® (our industry-specific solutions-based services), and our ProContractor professional grade tools, commercial vehicles, and pump, power and climate control product offerings, all of which are aimed at helping customers work more efficiently, effectively and safely. For more information visit [HercRentals.com](https://www.HercRentals.com).

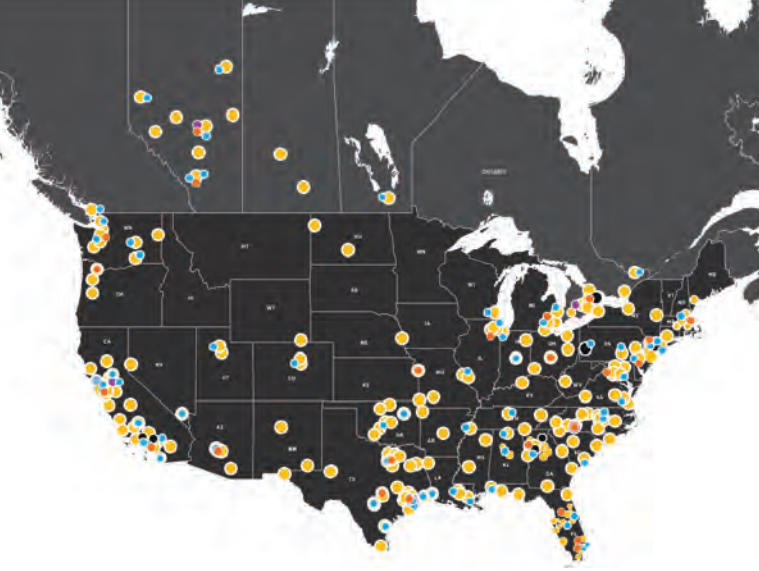



9

Aerial

Single person lifts, scissor lifts, articulating and telescopic booms

17

Air Compressors and Air Tools

Wide variety of air compressors, aftercoolers and air tools

25

Climate Control

A/C units, chillers, heaters, dehumidifiers and air movers

39

Compaction

Plate compactors, rammers, walk-behind rollers, ride-on asphalt rollers and ride-on soil rollers

43

Concrete and Flooring

Saws, drills, mixers, trowels, grinders, scrapers, sweepers, scrubbers, and more

59

Earthmoving

Compact track loaders, excavators, dozers, tractors, wheel loaders and more

69

Tools

Light construction tools, electric tools, and mechanical and industrial grade tools

85

Lawn

Augers, mowers, chain saws, stump grinders, trenchers, wood chippers and more

89

Lighting

Electric LED light towers, engine driven light towers, metal halide light towers, solar and small portable

95

Material Handling

Material and contractor lifts, forklifts, telehandlers, jack and cylinders, cranes and more

109

Pump and Power

Electric pumps, diaphragm pumps, diesel pumps, power generation, fuel tanks, and load banks

123

Trucks and Trailers

Wide variety of trucks and trailers with customization options.

133

Job Site and Traffic

Pedestrian and traffic barriers, message boards, storage containers and more

SERVICES AND INFORMATION

Safety First

Safe operation of our rental equipment is a top priority. SAFETY FIRST. SAFETY ALWAYS.

We offer Equipment Safe Operation Training with top-notch instructors for many of the equipment categories we rent.

All courses include hands-on practical training and evaluation. Upon successful course completion, you'll be issued a wallet card and certificate for the following operator certification courses:

- Aerial (Scissor, Boom, Manually Propelled MEWP)
- Forklift Class I, IV, V
- Variable Reach & Straight Mast Forklift Class VII

Training is available at your local branch or we can come to your job site.

Rental Terms

Herc Rentals provides daily, weekly, monthly and long-term rentals. Acceptable forms of payment are checks and major credit cards, or if you're a frequent customer, we invite you to open a commercial account with us.

Please note: two forms of identification are required from all customers who do not have a commercial account, preferably a valid driver's license and a major credit card.

For your convenience, visit [HercRentals.com/us/credit](https://www.herc.com/us/credit) to download, or complete our online credit application.

Transportation Services

Herc Rentals has one of the largest equipment delivery fleets in North America. Utilizing our special delivery fleet, we ensure your equipment arrives safely and on time.

Rental Protection Plan (RPP)

Herc Rentals offers you peace of mind when RPP is accepted at the start of the rental. This limits your out-of-pocket costs when accidental damages or theft occur on the jobsite. Have a Certificate of Insurance (COI)? RPP can bridge the gap in your insurance when the damage isn't costly enough to submit a claim, but is more than your deductible. Herc Rentals' RPP provides you a true worry-free rental experience.

Refueling and Cleaning Services

All equipment is delivered clean and with a full tank of fuel, and if returned in the same condition, no charges apply. For your convenience upon return, we offer cleaning and refueling services.

Refueling

Customer must refuel to starting level prior to return; or, refuel upon return. Fees will be based on gallons used. Refueling rates include costs for fuel tanks, maintenance, and labor.

Cleaning

Equipment must be cleaned prior to return; if not returned clean, fees will be assessed to bring equipment to rental-ready condition. Cleaning rates include costs for labor and materials.

Preventative Maintenance Services

To maintain the highest level of operating performance of our fleet of generators, pumps, carry deck cranes and similar equipment, Herc Rentals performs preventative maintenance as recommended by the manufacturer. In addition, Herc Rentals complies with all inspection requirements and applies a Preventative Maintenance (PM) charge associated with performing the maintenance and service.

The PM charge is a per hour charge that is applied to every hour the equipment is operating or running while on rent. The PM charge is between \$1 - \$4 depending on the type and size of the equipment and the number of hours which is determined by the meter machine installed on the equipment. PM charges are billed monthly based on 160 hours of use. At time of final invoice, the PM charge for the time on rent will be adjusted up or down to reflect actual hours used. Inspection fees may apply separately or as part of the PM charge. The PM charge is not a tax, or a government mandated charge and Herc Rentals may change it from time to time in its discretion.



SAFETY TRAINING

At Herc Rentals, we have the equipment safety training where and when you need it. We have a wide range of high quality operator safety training classes. Our classroom and hands-on training sessions help meet your training requirements while preparing each operator to get the job done right.

MEWP / Forklift Familiarization Upon Delivery

Upon delivery, the driver shall complete the following with the person receiving the mobile elevating work platform/ forklift:

- Identify the weather resistant compartment (for manual storage)
- Confirm that the manuals, as specified by the manufacturer, are on the MEWP/Forklift.
- Review control functions with the operator or person designated by the customer
- Review safety devices specific to the model MEWP/ Forklift being delivered

General Training

Our General Training format includes:

- Formal instruction (e.g., lecture, discussion, written material and manufacturer's training material)
- Practical training (demonstrations and exercises performed by the trainee)
- Evaluation of the operator's performance in the workplace (in collaboration with the customer)

In our courses we review

- Equipment-related topics
- Workplace-related topics
- Plant/Site specific rules



Difference Between General Training + Familiarization

GENERAL TRAINING	FAMILIARIZATION
Classroom/Formal Training	Hands-On Instruction only
Hands-On Evaluation	Time 10-45 minutes

Familiarization Does Not Satisfy Requirements for Certification

Herc Rentals can deliver Equipment Safe Operation Training to our customers using our Qualified Instructors for the following equipment we rent:

Powered Industrial Trucks (Forklifts) as required by OSHA 1910.178 and 1926.602:

- Internal Combustion Engine Trucks (solid/cushion tires) (Class IV)
- Internal Combustion Engine Trucks (pneumatic tires) (Class V)
- Rough Terrain Forklift Trucks (straight/vertical mast and variable/extended reach) (telescopic) (Class VII)
- Electric Motor Rider Trucks (Class I)
- Electric Motor Narrow Aisle Trucks (Class II)
- Electric Motor Hand Trucks or Hand/Rider Trucks (Class III)

Mobile Elevating Work Platforms (formerly Aerial Work Platform) covered by ANSI/SIA Standards:

- Vehicle Mounted Towable Boom Lift
- Manually Propelled Elevating Platform
- Boom Supported Elevating Work Platform
- Self-Propelled Elevating Work Platform

Other Equipment Safe Operator Training

- Courses Offered
- Skid Steer
- Backhoe
- Excavator
- Atrium Boom Lift

Train the Trainer Courses

- Mobile Elevating Work Platform (formerly Aerial Work Platform)
- Powered Industrial Trucks (Forklifts)

Silica Dust Training

- Silica Dust
- Personal protective equipment requirements

BENEFITS OF RENTING

Assistance from experienced professionals:

Renting not only helps reduce costs, it also provides access to expert knowledge and training. It allows customers to take advantage of professionals who will:

- We handle all of the essentials and more, including transportation, training, service, and setup.
- Access and secure the right equipment.
- Propose specialized equipment applications, such as aerial, pump & power, trucks, earthmoving and more.

Renting allows the customer to take on a wide variety of jobs and projects without the worry of necessary capital required to purchase.

- Seasonal and large jobs require specialized equipment that can be obtained by renting.
- Renting allows for equipment to be available 24-7.

ENVIRONMENTAL MANAGEMENT POLICY

Herc Rentals Inc. is committed to minimizing the impact of operations on the environment by implementing programs that incorporate sound environmental policy and sustainability practices. We will operate in accordance with all relevant local, state, and federal regulations and will strive to use pollution prevention and best management practices throughout our branches. Our corporate operations will provide the guidance and resources to our operations as regulation changes or conditions are found that need to be addressed. The support and guidance to the Policy can be found in the Environmental Procedures.

Herc Rentals is committed to:

- Handle, store, and dispose of substances that are defined as hazardous material in compliance with local, state, and federal regulations.
- Reduce, reuse, and recycle our waste products when applicable.
 - Company goal to reduce intensity of non-hazardous landfilled waste by 25% from 2019 baseline by 2030.
 - Continue to monitor hazardous waste activity to

New Equipment

Herc Rentals makes significant annual investments in the newest, most advanced equipment on the market.

Other Benefits

- Environmentally Friendly – “Clean & Green”
- Because rental equipment is newer, renting instead of buying ensures that customers have access to the most fuel-efficient and emission controlled equipment on the market
- All rental stores in California with certain types of equipment are required to be in compliance with CARB regulations
- These regulations can be implemented in other parts of the U.S.

- ensure recycling and incineration are utilized over landfill disposals.
- Minimize water consumption and ensure safe treatment within our branches by incorporating innovative design of wastewater treatment systems.
- Minimize energy consumption by employing energy reducing initiatives.
 - Company goal to reduce Scope 1 and Scope 2 greenhouse gas emissions intensity by 25% from our 2019 baseline by 2030.
 - Update lighting and HVAC with lower energy consuming sources when applicable or expired.
 - Negotiate utility sources for most renewable source available when applicable, which includes solar power generation at Herc facilities when feasible.
- Conduct regular training for employees working with petroleum storage tanks.
- Develop and maintain appropriate emergency and spill response programs.
- Reduce environmental impact by utilizing low impact products where possible.
- Monitor the environmental impact of our business practices and review our progress on a continual basis.
- Promote environmental stewardship and best management practices to our customers, vendors, and employees.
- Continuously improve our Environmental Management System.

ECOCLEAN

Herc Rentals remains committed to minimizing the impact on the environment by continuing to add ECOCLEAN options to our fleet. Look for the ECOCLEAN options throughout our catalog that are geared to support reductions in greenhouse gas (GHG) emissions compared to standard diesel or gasoline models.

EPA reports nearly 80% of GHG emissions emitted to air come from carbon emissions. Along with electricity, transportation gas emissions account for more than 50% of all total US greenhouse gas emissions and 11% comes from residential and commercial mainly by the use of fossil fuels burned for heat.

When considering the best equipment options for your needs, below is a list of power sources with potential savings in GHG gas emissions depending on engine size:

Solar - Optimal with 100% savings on greenhouse gas emissions during operation compared to other power sources.

EV or battery - Depending on charging source, can save 50-75% of carbon emissions compared to fuel combustion. Zero emissions during operation (i.e., tailpipe emissions).

Propane - Considered harmless to soil or groundwater, freshwater or saltwater. Emits 10-50% less GHG emissions and considered cleaner than biodiesel, 30-80% less carbon monoxide and 20% less nitrogen oxide than gasoline, and nearly 100% less particulate matter than diesel. Not considered an air pollutant and safer to transport than other fuels.

Biofuel - Can achieve 40-86% emissions savings compared with petroleum diesel depending on blend and source. 11% less carbon monoxide and 10% less particulate matter than diesel.

Hybrid - Dual power sources – battery & diesel, can reduce emissions by going longer hours/distance on the

same amount of fuel, where emissions are reduced by 30-40% of conventional fuel models.

Diesel - Saves about 13% on CO2 emissions compared to gasoline powered engines per volume of fuel.

- Tier 4* engines reduce particulate matter (PM) and oxides of nitrogen (NOx) to near-zero levels).
- Non-Tier 4* engines emit more NOx and PM than hybrid engines.

Gasoline - Although per gallon carbon emissions are less than diesel, takes more gasoline to do same work as a diesel engine.

*Tier 4 refers to the emission milestone established in 2014 by the U.S. Environmental Protection Agency and the California Air Resources Board applicable to new engines found in off-road equipment, including construction, mining and agricultural equipment, marine vessels and workboats, locomotives and stationary engines found in industrial and power generation applications.



ELECTRIC LED LINK-TOWERS 

Features include:

- Stabilizing outriggers enable towers to withstand windy conditions
- Ideal for construction, outdoor events, sports venues, increase parking lot security, and more

154,000 LUMENS | **UNLIMITED RUN TIME**

Model	Power	Height	Run Time	Weight	Dimensions	Features
Model 1	1000W	15' - 20'	12 hrs	1500 lbs	10' x 10' x 10'	Stabilizing outriggers
Model 2	2000W	20' - 25'	12 hrs	2000 lbs	10' x 10' x 10'	Stabilizing outriggers
Model 3	3000W	25' - 30'	12 hrs	3000 lbs	10' x 10' x 10'	Stabilizing outriggers



The future of the equipment rental industry is here.

ProControlTM
NextGen



Fleet Management

Reduce downtime and eliminate redundancy with real-time actionable data from ProControl NextGen.

- Utilization
- Diagnostics
- Alerts



Account Management

Easy-to-use, intuitive, and customizable account management features include:

- Complete account view
- Corporate or subsidiary views
- Purchase order management
- Accurate billing
- Automatic billing notifications



Analytics and Reporting

Make informed decisions for your business with our robust reporting suite. Select from a library of pre-built reports or build your own.

- Customizable dashboard
- Schedule reports
- Send reports to account contacts



Learn more at [HercRentals.com](https://www.HercRentals.com)

HercRentals[®]



AERIAL



Single Person Lifts
Electric Scissor Lifts
Compact Electric Scissor Lifts
Rough Terrain Scissor Lifts
Articulating Boom Lifts
Vertical Mast Lifts

Towable Boom Lifts
Atrium Lifts
Hybrid Boom Lifts
Telescopic Boom Lifts

VERTICAL MAST LIFTS



Single person lifts are a safer and more efficient alternative to ladders.

8-35 FT
WORKING HEIGHT

7-32 FT
PLATFORM HEIGHT



Features and applications include:

- Allows you to work 360 degrees with both hands from a secure, stable platform
- FT40 and FT140 can be assembled and disassembled in minutes
- Lightweight for sensitive floor applications
- A great addition for construction sites, maintenance, industrial, retail and warehousing operations



MAKE	MODEL	PLATFORM HEIGHT	WORKING HEIGHT	POWER	PLATFORM CAPACITY	FLOOR LOAD GROUND PRESSURE	DIMENSIONS (LWH)	WEIGHT	CAT-CLASS
JLG	Ecolift 70	7 ft 3 in	13 ft 3 in	Manual	330 lb	Rear tires 74.2 psi, front tires 79.22 psi	50 in / 28 in / 76 in	672 lb	400-1050
JLG	FT70	7 ft	13 ft	Battery	330 lb	Rear pads 53.17 psi, front pads 32.37 psi	44 in / 30 in / 65 in	108 lb	400-1070
JLG	FT140	13 ft 6 in	19 ft 6 in	Battery	330 lb	64.83 psi	58 in / 64 in / 79 in	326 lb	400-1100
Genie	AWP-30S DC	29 ft 6 in	35 ft 6 in	Battery	350 lb	Rear pads 22 psi, front pads 20.6 psi	53 in / 29 in / 78 in	867 lb	400-1220
Genie	GR-12	11 ft 5 in	17 ft 5 in	Battery	500 lb	52.31 psi	53 in / 29 in / 62 in	1,581 lb	400-1270
Genie	GR-20	19 ft 11 in	25 ft 11 in	Battery	350 lb	66.92 psi	53 in / 32 in / 78 in	2,451 lb	400-1290
JLG	T26E	26 ft 5 in	8 ft 8 in	Battery	500 lb	265 psi	9 ft 3 in / 3 ft 9 in / 6 ft 7 in	6,900 lb	400-1310
JLG	T32E	32 ft 3 in	14 ft 11 in	Battery	500 lb	178 psi	11 ft 10 in / 3 ft 11 in / 6 ft 7 in	10,140 lb	400-1320

ELECTRIC SCISSOR LIFTS



Electric scissor lifts, capable of supporting two people, are ideal for indoor/outdoor construction and maintenance projects.

26-45 FT
WORKING HEIGHT

19-39 FT
PLATFORM HEIGHT



Features and applications include:

- Quiet and clean operation for a variety of environments
- Fits through most standard doorways, tight aisles and elevators
- Hydraulic fluid containment system available on 2021 JLG and Skyjack models
- Long battery life
- Non-marking tires
- Can be driven at full height



MAKE	MODEL	PLATFORM HEIGHT	WORKING HEIGHT	POWER	PLATFORM CAPACITY	WHEEL LOAD	DIMENSIONS (LWH)	WEIGHT	CAT-CLASS
Skyjack	SJIII 3219	19 ft	26 ft	Battery	550 lb	110 psi	70 in / 32 in / 79 in	2,580 lb	405-1090
JLG	2632ES	25 ft 6 in	31 ft 6 in	Battery	500/800 lb	90 psi	91 in / 32 in / 92 in	4,635 lb	405-1140
Genie	GS-3232	32 ft	38 ft	Battery	500 lb	113 psi	96 in / 32 in / 94 in	5,185 lb	405-1200
JLG	3246ES	31 ft 9 in	37 ft 9 in	Battery	700/1,000 lb	87 psi	99 in / 46 in / 93 in	4,975 lb	405-1210
Genie	GS-4047	39 ft	45 ft	Battery	550 lb	175 psi	96 in / 47 in / 100 in	7,185 lb	405-1260

COMPACT ELECTRIC SCISSOR LIFTS



Compact electric scissor lifts are built for light maintenance work and support up to two people.

19-24 FT
WORKING HEIGHT

13-19 FT
PLATFORM HEIGHT



Features and applications include:

- Long battery life
- Quiet and clean operation for a variety of environments
- Non-marking tires
- Fits through doorways and elevators
- Excellent for construction sites, maintenance, industrial, retail and warehousing operations

XTRA-DECK®

Pull-down Xtra-Deck gives additional 20 inch height for 1-person access through ceiling panels with guardrails on 4 sides.



MAKE	MODEL	PLATFORM HEIGHT	WORKING HEIGHT	POWER	PLATFORM CAPACITY	MACHINE LOAD	WHEEL LOAD	DIMENSIONS (LWH)	WEIGHT	CAT-CLASS
MEC	1330 SE	13 ft	19 ft	Battery	530 lb	201 psf	112 psi	58 in / 30 in / 74 in	1,900 lb	405-1060
MEC	1330 SE with Leak Control System	13 ft	19 ft	Battery	530 lb	201 psf	112 psi	58 in / 30 in / 74 in	1,900 lb	405-1060
MEC	Micro 13 Xtra-Deck™	13 ft	19 ft	Battery	530 lb	221 psf	120 psi	58 in / 30 in / 74 in	2,050 lb	405-1065
MEC	Micro 19	18 ft 4 in	24 ft	Battery	500 lb	224 psf	112 psi	60 in / 32 in / 79 in	2,690 lb	405-1085
MEC	Micro 19 Xtra Deck™	18 ft 4 in	24 ft	Battery	500 lb	233 psf	117 psi	60 in / 32 in / 79 in	2,820 lb	405-1087

ROUGH TERRAIN SCISSOR LIFTS

Electric scissor lifts are designed for outdoor aerial projects with limited access and less-than-ideal ground conditions.

32-53 FT
WORKING HEIGHT

26-53 FT
PLATFORM HEIGHT



Features and applications include:

- Quick set up
- Outriggers proved stability
- Foam filled tires only on Herc Rentals fleet
- Large decks allow additional space for more people and materials
- Ideal for outdoor construction sites, industrial use and more

* Guardrails in fixed position



MAKE	MODEL	PLATFORM HEIGHT	WORKING HEIGHT	POWER	PLATFORM CAPACITY	DIMENSIONS (LWH)	WEIGHT	CAT-CLASS
Genie	GS 2669 RT	26 ft 2 in	32 ft	Dual fuel	1,500 lb	10 ft 3 in / 5 ft 9 in / 8 ft 6 in	7,295 lb	405-1430
Genie	GS 2669 RT	26 ft 2 in	32 ft	Diesel	1,500 lb	10 ft 3 in / 5 ft 9 in / 8 ft 6 in	7,295 lb	405-1450
SkyJack	SJ 8841 RT	41 ft	47 ft	Dual fuel	1,500 lb	11 ft 5 in / 7.25 ft / 9 ft 6 in	10,880 lb	405-1780
SkyJack	SJ 8841 RT	41 ft	47 ft	Diesel	1,500 lb	11 ft 5 in / 7.25 ft / 9 ft 6 in	10,880 lb	405-1800
JLG	530 LRT	53 ft	53 ft	Dual fuel	1,500 lb	17 ft / 7 ft 7 in / 10 ft 1 in	17,000 lb	405-1850
JLG	530 LRT	53 ft	53 ft	Diesel	1,500 lb	17 ft / 7 ft 7 in / 10 ft 1 in	17,000 lb	405-1860

TOWABLE BOOM LIFTS



Towable boom lifts can be attached to any vehicle with a standard hitch and hauled to job sites at an industry-leading speed of 65 mph.

34-50 FT
PLATFORM HEIGHT

20-30 FT
OUTREACH



Features and applications include:

- Gasoline engine or 24V DC electric power
- Accessory mounting tray accommodates your generator, air compressor or pressure washer
- Great for tree trimming, indoor or outdoor decorating, construction, painting and maintenance



MAKE	MODEL	PLATFORM HEIGHT	OUTREACH	POWER	PLATFORM CAPACITY	DIMENSIONS (LWH)	WEIGHT	CAT-CLASS
JLG	T350	34 ft 5 in	20 ft 2 in	24V DC	500 lb	21 ft 9 in / 4 ft 11 in / 6 ft 6 in	3,400 lb	410-1010
JLG	T500J	50 ft	30 ft	24V DC	500 lb	27 ft 4 in / 5 ft 8 in / 7 ft 5 in	4,800 lb	410-1030

ATRIUM LIFTS



Atrium lifts or compact crawlers allow you to access job sites in tough to reach places whether you have to squeeze through narrow doorways, gates, down stairs or aisles.

50-89 FT
PLATFORM HEIGHT

21-46 FT
OUTREACH

Features and applications include:

- Auto safety and stability system
- Multi-position outrigger system
- Fits through standard doorways
- Can be used indoors or outdoors
- Tracked wheels allow for climbing of sloped areas



MAKE	MODEL	PLATFORM HEIGHT	MACHINE WIDTH	OUTREACH	BASKET CAPACITY	DIMENSIONS (LWH)	WEIGHT	CAT-CLASS
JLG	X430AJ	50 ft	2 ft 5 in	21 ft 7 in	500 lb	16 ft 5 in / 2 ft 5 in / 6 ft 6 in	4,392 lb	464-1016
JLG	X600AJ	59 ft 3 in	2 ft 7 in	30 ft	500 lb	16 ft 5 in / 2 ft 7 in / 6 ft 6 in	6,571 lb	464-1022
JLG	X770AJ	77 ft 5 in	3 ft 3 in	43 ft	500 lb	20 ft 9 in / 3 ft 3 in / 6 ft 6 in	9,665 lb	464-1036
Reach Master	FS95	89 ft	2 ft 7 in	46 ft	440 lb	20 ft 8 in / 2 ft 7 in / 6 ft 6 in	8,250 lb	464-1042

HYBRID BOOM LIFTS



Hybrid booms are designed for indoor or outdoor applications that demand low noise and clean performance, articulated hybrid boom lifts can get to challenging areas that scissor lifts can't.

33-60 FT
PLATFORM HEIGHT

19-45 FT
OUTREACH



Features and applications include:

- Battery-powered drive with on-board diesel generator or shore power plug for charging purposes
- All Electric operation ideal for work sites requiring no emissions
- 4WD and full-time active oscillating axles provide traction for gradeability up to 45%
- Great for construction sites, sports arenas, malls, challenging pedestrian areas, and more

MAKE	MODEL	PLATFORM HEIGHT	WORKING HEIGHT	PLATFORM CAPACITY	OUTREACH	POWER	DIMENSIONS (LWH)	WEIGHT	CAT-CLASS
JLG	H340AJ	33 ft 9 in	39 ft 9 in	500 lb	19 ft 11 in	Battery w/ diesel generator	18 ft 2 in / 6 ft 4 in / 6 ft 7 in	9,860 lb	410-2060
Genie	Z-45 FE	45 ft 8 in	51 ft 8 in	660 lb	22 ft 9 in	Battery w/ diesel generator	20 ft 1 in / 7 ft 6 in / 7 ft 6 in	14,460 lb	410-3127
JLG	M600JP	60 ft 4 in	66 ft	500 lb	44 ft 5 in	Battery w/ diesel generator	33 ft 4 in / 7 ft 11 in / 8 ft 4 in	16,050 lb	410-2530
Genie	Z-60/37 FE	59 ft 7 in	65 ft 7 in	500 lb	36 ft 7 in	Battery w/ diesel generator	26 ft 9 in / 8 ft 2 in / 8 ft 4 in	17,100 lb	410-3205



REQUEST

TRAINING

Equipment Safety Operator Training

ARTICULATING BOOM LIFTS



*Eco Clean options available

Articulating booms are built for getting around obstacles and can travel both vertically and horizontally.

30-135 FT
PLATFORM HEIGHT

21-70 FT
OUTREACH



Features and applications include:

- Smooth operation of multiple functions simultaneously
- Powered by battery or fuel-efficient engines
- Reach full height and lower in less than 2 minutes
- Zero tail swing in stowed and raised working positions
- Ideal for construction, utility work, warehousing, arborists and more




MAKE	MODEL	PLATFORM HEIGHT	OUTREACH	UP/OVER CLEARANCE	POWER	MACHINE WIDTH	PLATFORM CAPACITY	WEIGHT	CAT-CLASS
Genie	Z-30/20N RJ	30 ft	21 ft 5 in	12 ft	48V DC / 24V DC	3 ft 11 in	500 lb	14,170 lb	410-2020
Genie	Z-33/18	32 ft 10 in	18 ft 3 in	14 ft 1 in	48V DC	4 ft 11 in	440 lb	8,080 lb	410-2030
Genie	Z-34/22N	34 ft 6 in	22 ft 3 in	15 ft 5 in	48V DC	4 ft 10 in	500 lb	11,400 lb	410-2045
Genie	Z-40 /23N RJ	40 ft 5 in	22 ft 8 in	21 ft	48V DC	4 ft 11 in	500 lb	15,230 lb	410-2080
Genie	Z-45/25 DC	45 ft 6 in	25 ft	22 ft	48V DC	5 ft 10 in	500 lb	15,850 lb	410-2130
JLG	340AJ	33 ft 10 in	19 ft 11 in	17 ft	Dual fuel	6 ft 4 in	500 lb	9,700 lb	410-3030
JLG	340AJ	33 ft 10 in	19 ft 11 in	17 ft	Diesel	6 ft 4 in	500 lb	9,700 lb	410-3040
Genie	Z-45/25 RJ	45 ft 6 in	22 ft 8 in	21 ft 3 in	Diesel	5 ft 10 in	500 lb	16,300 lb	410-3120
JLG	450AJ	45 ft	25 ft	25 ft	Diesel	7 ft 9 in	500 lb	12,650 lb	410-3120
Genie	Z-45XC	45 ft 6 in	24 ft 9 in	24 ft 5 in	Diesel	7 ft 6 in	660/1,000 lb	16,360 lb	410-3120
MEC	60-J	60 ft	42 ft 8 in	20 ft	Diesel	8 ft	500 lb	17,900 lb	410-3200
JLG	600AJ	60 ft 7 in	39 ft 9 in	26 ft	Diesel	8 ft 2 in	500 lb	22,740 lb	410-3200
JLG	800AJ	80 ft	51 ft 10 in	32 ft	Diesel	8 ft	500 lb	34,300 lb	410-3300
JLG	1250 AJP	125 ft	63 ft 2 in	60 ft 6 in	Diesel	8 ft 2 in	500/1,000 lb	44,000 lb	410-3350
Genie	ZX-135/70	135 ft	69 ft 9 in	75 ft 6 in	Diesel	8 ft 2 in	600 lb	46,500 lb	410-3360

HercRentals®

Customer-focused ecommerce experience.

Browse and rent equipment anytime, from anywhere.

Experience now at [HercRentals.com](https://www.HercRentals.com)

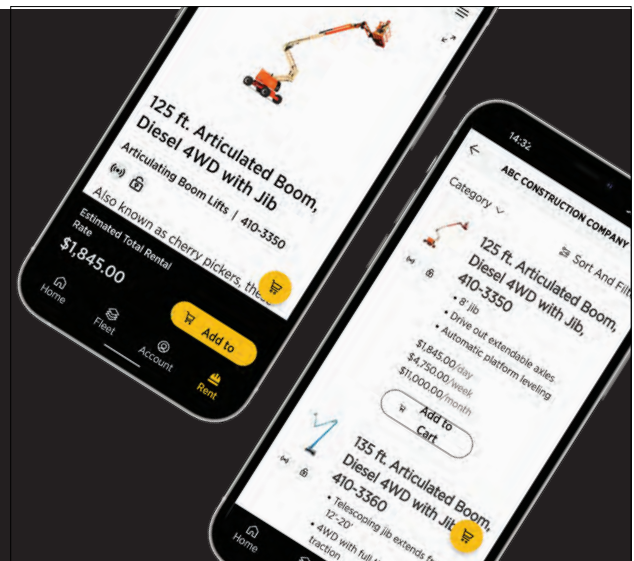

TELESCOPIC BOOM LIFTS

Telescopic boom lifts allowing you to reach the highest of heights without the use of a crane – safely and quickly.

39-185 FT
PLATFORM HEIGHT

31-90 FT
OUTREACH



Features and applications include:

- 4WD and 4-wheel steering
- Up to 180-degree platform rotation
- Platform can hold three people and materials
- Large work envelope with up to 10-foot jib
- Ideal for oil and gas industries, commercial and industrial construction, maintenance, entertainment staging and more

MAKE	MODEL	PLATFORM HEIGHT	WORKING HEIGHT	PLATFORM CAPACITY	MAX OUTREACH	POWER	DIMENSIONS (LWH)	WEIGHT	CAT-CLASS
JLG	400S	40 ft	46 ft	600/1,000 lb	33 ft 3 in	Diesel	24 ft 1 in / 7 ft 6.8 in / 8 ft 1 in	13,640 lb	410-4040
Genie	S-40XC	39 ft 6 in	45 ft 6 in	600/1,000 lb	31 ft 1 in	Diesel	25 ft 6 in / 8 ft 2 in / 8 ft 3 in	14,124 lb	410-4040
JLG	460SJ	46 ft	52 ft	600 lb	39 ft	Diesel	29 ft 3 in / 7 ft 6.8 in / 8 ft 1 in	16,600 lb	410-4090
Genie	S-45XC	45 ft	44 ft 6 in	600/1,000 lb	36 ft 2 in	Diesel	26 ft 3 in / 8 ft 2 in / 8 ft 3 in	16,300 lb	410-4090
Genie	S-60XC	60 ft	66 ft	600/1,000 lb	48 ft 7 in	Diesel	28 ft 7 in / 8 ft 2 in / 9 ft 3 in	22,930 lb	410-4140
JLG	600S	60 ft 3 in	66 ft	600/1,000 lb	49 ft 6 in	Diesel	28 ft 7 in / 8 ft 2 in / 8 ft 2.4 in	21,461 lb	410-4140
JLG	660SJ	66 ft 8 in	72 ft 8 in	500/750 lb	56 ft 9 in	Diesel	35 ft 4.7 in / 8 ft 2 in / 8 ft 2 in	26,650 lb	410-4190
Genie	S-65XC	65 ft	71 ft	600/1,000 lb	54 ft 2 in	Diesel	31 ft 10 in / 8 ft 2 in / 9 ft 3 in	25,160 lb	410-4190
Genie	S-80XC	80 ft	86 ft	600/1,000 lb	68 ft 6 in	Diesel	37 ft 7 in / 8 ft 2 in / 9 ft 2 in	37,000 lb	410-4242
JLG	860SJ	86 ft	86 ft	500/750 lb	75 ft	Diesel	40 ft / 8 ft 2 in / 10 ft	36,400 lb	410-4300
Genie	S-85XC	85 ft	91 ft	600/1,000 lb	74 ft 6 in	Diesel	40 ft 7 in / 8 ft 2 in / 9 ft 2 in	39,500 lb	410-4305
Genie	Z-135/70	135 ft	141 ft	600/1,000 lb	75 ft	Diesel	42 ft 5 in / 8 ft 2 in / 10 ft 2 in	46,500 lb	410-3360
JLG	1350SJP	135 ft	141 ft	500/1,000 lb	80 ft	Diesel	38 ft 11 in / 8 ft 2 in / 10 ft	45,000 lb	410-3360
JLG	1200SJP	120 ft	126 ft	500/1,000 lb	75 ft	Diesel	34 ft 11 in / 8 ft 2 in / 10 ft	40,900 lb	410-4400
Genie	SX-125XC	125 ft	131 ft	660/1,000 lb	80 ft	Diesel	46 ft 9 in / 8 ft 2 in / 10 ft	45,636 lb	410-4410
Genie	SX-135XC	135 ft	141 ft	660/1,000 lb	90 ft	Diesel	43 ft 7 in / 8 ft 2 in / 10 ft	47,500 lb	410-4422
JLG	1500SJ	150 ft	156 ft	500/1,000 lb	80 ft	Diesel	43 ft / 8 ft 2 in / 10 ft	48,000 lb	410-4430
Genie	SX-150XC	152 ft	158 ft	750 lb	80 ft	Diesel	42 ft 8 in / 8 ft 2 in / 10 ft	49,950 lb	410-4430
Genie	SX-180	180 ft	186 ft	750 lb	80 ft	Diesel	42 ft 8 in / 8 ft 2 in / 10 ft	55,000 lb	410-4440
JLG	1850SJ	185 ft	191 ft	500/1,000 lb	80 ft	Diesel	47 ft 9 in / 8 ft 2 in / 10 ft Jib Stowed	59,930 lb	410-4440


ProControlTM

NextGen



Herc Rentals' live delivery and pick-up tracking.

Increase security and know exactly when your rented equipment will arrive or leave your job site.

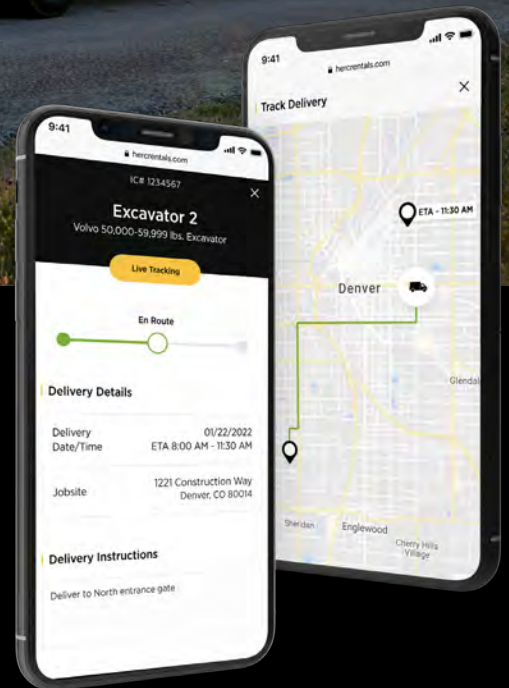

- Plan your workday based on when equipment will arrive
- Grant access to job sites at specified times to maintain security



Learn more at [HercRentals.com](https://www.HercRentals.com)

HercRentals[®]



AIR TOOLS AND COMPRESSORS



AIR COMPRESSORS

Portable Compressors
 Large Compressors
 Tow Behind Compressors
 Electric Compressors
 Dryers
 Aftercoolers

AIR TOOLS

Paving Breakers
 Busters
 Tampers
 Rock Drills
 Floor Nailers
 Hammers
 Diggers

Air Manifold
 Post Drivers
 Air Drills
 Air Grinders
 Air Saws
 Air Impact Wrenches
 Air Movers

PORTABLE AIR COMPRESSORS



*Eco Clean options available

Designed for finishing work with small air tools.

Features and applications include:

- Electric and engine driven
- Thermal overload motor protection

5-8 GAL
SINGLE STAGE



MAKE	MODEL	CFM	HP/MOTOR	POWER	FITTING	DIMENSIONS (LWH)	WEIGHT	CAT CLASS
Mi-T-M	AM1-HE02-05M	4.2 @ 90 psi	2.0 hp / Electric	120V	3/8 Quick connect	20.5 in / 15.5 in / 17.5 in	61 lb	140-1020
Mi-T-M	AM1-PE15-08M	7.3 @ 90 psi	1.5 hp / Electric	120V	3/8 Quick connect	44.5 in / 18.5 in / 25 in	170 lb	140-1040
Mi-T-M	AM1-PH65-08M	13.9 @ 90 psi	196 cc Honda OHV	Gas	3/8 Quick connect	44.5 in / 18.5 in / 27 in	175 lb	140-1100

TOW BEHIND PORTABLE AIR

Designed to produce 100 to 150 psi and equipped with running gear for easy transportation.

110-425 CFM | 8-12.6 HR RUN TIME 100% LOAD



Features and applications include:

- User has ability to change pressure and flow settings during operation
- Ideal for powering handheld air tools, sandblasting, sprinkler and irrigation line blow-out, cable laying and pipeline testing



MAKE	MODEL	CFM	RUN TIME	POWER	DIMENSIONS (LWH)	WEIGHT	CAT-CLASS
Atlas Copco	XAS 110	110 cfm @ 100 psi	8 hr @ full load	25 hp / Diesel	79 in / 48 in / 51 in	1,100 lb	140-1220
Atlas Copco	XAS 185	185 cfm @ 100 psi	8 hr @ full load	49 hp / Diesel	139 in / 64 in / 58 in	2,105 lb	140-1260
Doosan	C185	185 cfm @ 100 psi	12.6 hr @ full load	49 hp / Diesel	137.6 in / 68.5 in / 67.5 in	2,455 lb	140-1260
Atlas Copco	XATS 400	397 cfm @ 150 psi	8 hr @ full load	125 hp / Diesel	161 in / 71.5 in / 70 in	4,555 lb	140-1360
Doosan	P425-HP375	425 cfm @ 100 psi - 375 cfm @ 150 psi	9-10 hr @ full load	138 hp / Diesel	152 in / 78 in / 70 in	5,030 lb	140-1360

LARGE AIR COMPRESSORS

These diesel-powered large portable air compressors and various pressure up to 150 psi

825-1,600 CFM | 8-9.3 HR RUN TIME 100% LOAD



MAKE	MODEL	CFM	RUN TIME	POWER	DIMENSIONS (LWH)	WEIGHT	CAT-CLASS
Doosan	XP825/HP750WCU-T4F	825 cfm @ 125 psi - 750 cfm @ 150 psi	9.3 hr @ full load	266 hp / Diesel	203 in / 90.2 in / 88.5 in	9,720 lb	140-1380
Doosan	HP915WCU-T4F	915 cfm @ 150 psi	8.7 hr @ full load	305 hp / Diesel	226.6 in / 82.6 in / 97.9 in	11,382 lb	140-1385
Atlas Copco	XAS900JDT4F	867 cfm @ 100 psi - 750 cfm @ 150 psi	8 hr @ full load	250 hp / Diesel	203 in / 80 in / 86 in	7,980 lb	140-1460
Doosan	HPI600WCU-T4F-IQ	1,600 cfm @ 150 psi	9 hr @ full load	580 hp / Diesel	235 in / 90 in / 102 in	19,565 lb	140-1480

ELECTRIC AIR COMPRESSORS



Ideal for indoor jobs, these electric air compressors are quiet, don't require expensive fuel or produce fumes.

Features include:

- Allows operator to set pressure at any level between 90 to 150 psi
- Delivers the exact flow necessary for an application—conserving power and allowing for easier operation

240-1,521 CFM
50-350 HP



MAKE	MODEL	CFM	POWER	DIMENSIONS (LWH)	WEIGHT	CAT-CLASS
Quincy	QSI-50	240 cfm	50 hp / Electric	114 in / 48 in / 85 in	3,000 lb	140-1645
Quincy	QSI-75	365 cfm	75 hp / Electric	116 in / 48 in / 85 in	3,500 lb	140-1660
Quincy	QSI-100	500 cfm	100 hp / Electric	116 in / 48 in / 85 in	4,500 lb	140-1670
Quincy	QSI-150	750 cfm	150 hp / Electric	128 in / 84 in / 85 in	11,000 lb	140-1680
Quincy	QSI-200	1,000 cfm	200 hp / Electric	128 in / 84 in / 85 in	11,000 lb	140-1690
Quincy	QSI-350	15,00 cfm	350 hp / Electric	142 in / 84 in / 85 in	15,742 lb	140-1700
Quincy	QSI-750	745 cfm @ 100 psi	150 hp / Electric	116 in / 68 in / 76.25 in	7,500 lb	140-1675
Quincy	QSI-1500	1,521 cfm @ 100 psi	300 hp / Electric	132 in / 80 in / 89.25 in	10,500 lb	140-1695

DRYERS + AFTERCOOLERS

Aftercoolers reduce the temperature of the compressed air but leave a substantial amount of moisture behind. That's where the dryers come in. Air dryers provide continuous dry air to the compressed air supply line.

450-1,600 CFM > **Hankison**

Features and applications include:

- Reduced risk of fire
- Protects downstream equipment from excessive heat
- Air driven motor fan
- Two-stage filtration, moisture and particulate
- Two to three-inch NPT male inlet and discharge connections
- After filter to remove desiccant dust—float-type drains on prefilter



MAKE	MODEL	FLOW	MAX INLET PRESSURE	POWER	DIMENSIONS (LWH)	WEIGHT	CAT-CLASS
Hankison	RDH450GAC	450-650 cfm	250 psi	120V	70 in / 50 in / 82 in	2,200 lb	140-2310
Hankison	RDH930GAC	750-1,000 cfm	150 psi	120V	71 in / 75 in / 80 in	3,800 lb	140-2330
Hankison	RDH1550GAC	1,000-1,600 cfm	150 psi	120V	97 in / 73 in / 81 in	6,000 lb	140-2350

OIL FREE AIR SOLUTIONS QUICK REFERENCE

Cat Class 140-1695.


Electric System

1500 CFM @ 125 PSI



Diesel System

1500 CFM @ 125 PSI

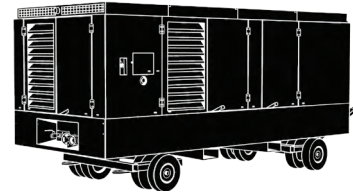

Shore Power

Direct power for continuous operation

Power



Diesel Power

Requires daily refueling



ZERO Emissions

Emissions

4,320 Gal/Month

71.5 sq ft (11 ft x 6.5 ft)

Footprint

119 sq ft (17 ft x 7 ft)

No Berm Needed

Environmental

Berm Required
Plus berm maintenance



Unlimited Run Time

Max Run Time Before Fueling

11 Hours

	Electric
CFM Volume	1,500
Max Run Time	10 hr day
KW Consumption Per Hour	261 KW
KW Consumption Per Day	2,610 KW
KW Costs Per Hour	\$0.07
Work Hours Per Month**	200
KW Cost Per Month	\$5,481
Labor Costs to Refuel Per Month	\$0
TOTAL OPERATING COST PER MONTH	\$5,481

	Diesel
CFM Volume	1,500
Max Run Time	10 hr day
Fuel Consumption Per Hour	21.6 gal
Diesel Price Per Gallon AVG	\$5.27
Fuel Costs Per Hour	\$113.83
Work Hours Per Month**	200
Fuel Cost Per Month	\$22,766
Labor Costs to Refuel Per Month	\$299
TOTAL FUELING COST PER MONTH	\$23,065

PAVING BREAKERS

Tough and dependable, built to take on big jobs like heavy demolition and concrete breaking.

33-91 LB



MAKE	APT	APT	APT
MODEL	117	M160	M190
SHANK SIZE	1 in X 4-1/4 in	1-1/8 in x 6 in	1-1/8 in x 6 in
STROKE	3-3/8 in	4-1/8 in	6-1/8 in
BPM	1,850	1,680	1,350
CFM	34-48 @ 90 psi	60-65 @ 90 psi	75-80 @ 90 psi
AIR INLET NPT	3/8 in male	1/2 in male	3/4 in male
WEIGHT	33 lb	68 lb	91 lb
CAT-CLASS	120-1610	120-1640	120-1660

CHIPPING HAMMERS

Scale, chisel or remove concrete build-up from the sides of cement mixers.

15 LB

MAKE	APT
MODEL	264H
SHANK SIZE	.580 hex
STROKE	4 in
BPM	1,375
CFM	34-36 @ 90 psi
AIR INLET NPT	7/8-24 in
WEIGHT	15 lb
CAT-CLASS	120-1520



RIVET BUSTERS

Rivet removal, tank cutting, and general brick or concrete demolition.

33 LB

MAKE	APT	APT
MODEL	M133CN	M1133
SHANK SIZE	1-3/16 in / 12 in or 18 in	1-3/16 in / 12 in or 18 in
STROKE	8 in	11 in
BPM	1,140	850
CFM	42-46 @ 90 psi	48-52 @ 90 psi
AIR INLET NPT	1/2 in female	1/2 in female
WEIGHT	30 lb	33 lb
CAT-CLASS	120-2030	120-2040



DIGGERS

Blast through clay, shale, hard pan and frozen ground with pneumatic clay diggers.

31 LB

MAKE	APT
MODEL	M1118
SHANK SIZE	7/8 in x 3-1/4 in
STROKE	3-3/8 in
BPM	1,850
CFM	34-36 @ 90 psi
AIR INLET NPT	3/8 in male
WEIGHT	31 lb
CAT-CLASS	120-1700



ROCK DRILLS

Designed for construction, utility work, mining and quarries. Light, medium and heavy-duty models are available.

19-61 LB

MAKE	APT	APT	APT
MODEL	M115	M137	M155
SHANK SIZE	7/8 in x 3-1/4 in	7/8 in X 3-1/4 in	7/8 in X 3-1/4 in
STROKE	1-3/8"	2-5/8 in	3 in
BPM	2,900	2,300	2,100
CFM	32-36 @ 90 psi	85-90 @ 90 psi	110-120 @ 90 psi
AIR INLET NPT	3/8 in male	1/2 in male	3/4 in male
WEIGHT	19 lb	38 lb	61 lb
CAT-CLASS	120-1760	120-1780	120-1820



TAMPERS

Fill holes, compact soil or pack asphalt with backfill tampers.

37 LB

MAKE	APT
MODEL	M131
CHUCK SIZE	6 in round
STROKE	5-1/2 in
BPM	670
CFM	38-42 @ 90 psi
AIR INLET NPT	1/2 in female
WEIGHT	37 lb
CAT-CLASS	150-1720



AIR MANIFOLD

Deliver compressed air to supply up to eight pneumatic tools simultaneously with air manifolds.

Features and applications include:

- Conveniently assembled to save time
- Drain port can be partially opened to expel moisture build-up
- Pressure relief valve provides protection against excessive pressure build-up
- Tanks act as moisture separators by allowing particulates to fall out of main supply line

15 GAL
TANK CAPACITY



MAKE	MODEL	TANK CAPACITY	INLET	OUTLETS	WORKING PRESSURE	WEIGHT	CAT-CLASS
Texas Pneumatic	TX-2AMF	15 gal (ASME)	(1) 2 in 4-prong coupling	(8) 3/4 in ball valves w/ crows ft couplings	200 psi	63 lb	140-3580

POST DRIVERS

Drive T-posts, fence posts, sign posts and more.

Features and applications include:

- Anti-vibration dampening, cushion grip handle
- Rhino Tension Grip™ crankcase cover for fast inspection and maintenance
- High-grade virgin aluminum cast body
- Ideal for building fences, driving posts and tent stakes

45-55 LB



MAKE	MODEL	CHUCK/BUTT SIZE	CFM @ 90 PSI	WEIGHT	CAT-CLASS
Rhino	PD-55	3-7/8 in	42	54.6 lb	115-2600
Rhino	MULTI-PRO XA	2-1/2 in	Gas	44 lb	115-2610

AIR DRILLS

Ideal for drilling, sawing, valve guide reaming, cylinder honing, and wire brushing.

Features and applications include:

- Quick-change keyless cutter system
- Ideal for the automotive industry and manufacturing

1/2-3 IN
DIAMETER



MAKE	MODEL	TYPE	SIZE	CFM	FREE SPEED	CAT-CLASS
Cleco	15DP	Horizontal	1/2 in	15 @ 90 psi	160 rpm	120-3500
Ingersoll Rand	728LA2	Horizontal	3/8 in	19 @ 90 psi	3,800 rpm	120-3510
CS Unitec	22404001	Rotary	3 in	31 @ 90 psi	0-625 rpm	100-1180
CS Unitec	MAB 525	Magnetic	2 in - 2-1/2 in	N/A	580 rpm	130-1250
CS Unitec	ECO80AK	Magnetic	3 in	N/A	4 speed	130-1260

AIR GRINDERS

Remove excess materials, smooth metal joints after welding or remove paint and primer.

Features and applications include:

- Lube-free for reduced maintenance
- Ideal for close-quarter work in metal fabricating



MAKE	MODEL	TYPE	DIAMETER	ARBOR	FREE SPEED	WEIGHT	CAT-CLASS
Ingersoll Rand	HA120RP1045	Right angle	4.5 in	3/8 in	12,000 rpm	3.6 lb	120-3010
Ingersoll Rand	88V60P	Batwing	7 in	5/8 in	6,500 rpm	8.75 lb	120-3020

AIR IMPACT WRENCHES

Power and torque you need for high-speed bolting.

Features and applications include:

- Lightweight and easy to use
- Comfortable, ergonomic handle boosts productivity

3/8 - 1 1/2 IN
DRIVE SIZE



MAKE	MODEL	DRIVE	MAX TORQUE	SPEED	WEIGHT	CAT-CLASS
Cleco	9525	3/8 in	510 ft lb	8,000 rpm	2.9 lb	135-2560
Ingersoll Rand	MP-1700	1/2 in	370 ft lb	6,500 rpm	5.3 lb	135-2580
Ingersoll Rand	2925Ti	3/4 in	1,450 ft lb	5,200 rpm	12 lb	135-2590
Ingersoll Rand	2925B2Ti	1 in	1,600 ft lb	6,500 rpm	15.20 lb	135-2600
Ingersoll Rand	3955B2Ti	1-1/2 in	5,000 ft lb	295 rpm	36.5 lb	135-2610
Ingersoll Rand	3955B1Ti	1-1/2 in spline	5,000 ft lb	2,750 rpm	34.6 lb	135-2620

AIR SAWS

Cut through concrete, granite, heavy sections of aluminum, steel tubing, and more.

Features include:

- Self-locking throttle
- Built-in lubricator
- Adjustable depth and angle of cuts

2 3/8 - 8 1/4 IN
CIRCULAR AND RECIPROCATING



MAKE	MODEL	TYPE	BLADE SIZE	AIR CONSUMPTION	CAT-CLASS
Ingersoll Rand	S80	Circular	8-1/4 in	67 cfm @ 90 psi	120-3600
Ingersoll Rand	SRA010A1	Reciprocating	6 in - 12 in	51 cfm @ 90 psi	120-3610
CS Unitec	5 1212 0010	Hack saw	6 in - 30 in	51 cfm @ 90 psi	120-3620
CS Unitec	5 6003 0010	Portable band	44-7/8 in x 1/2 in	21 cfm @ 90 psi	120-3630

AIR MOVERS

High-powered, high volume ventilators are designed for exhausting fumes and delivering a fresh air supply.

Features and applications include:

- Available with enclosed or explosion proof motors
- Spark resistant heavy-duty fan blades
- Ideal for use in refineries, chemical plants, metal fabrication plants, paper and pulp plants, shipyards, and the marine and steel industry

3 - 24 IN DIAMETER




MAKE	MODEL	AIRFLOW			INSIDE DIAMETER	DIMENSIONS (LWH)	WEIGHT	CAT-CLASS
COPPUS	175 CV	1,500 cfm			8 in	39 in / 11.4 in / 13.8 in	73 lb	700-1220
Texas Pneumatic	TX-3-AM	60 psig - 863 cfm	80 psig - 1,067 cfm	100 psig - 3,698 cfm	3 in	32 in / 7.3 in / 7 in	10 lb	710-1220
Texas Pneumatic	TX-6-AM	60 psig - 2,560 cfm	80 psig - 3,020 cfm	100 psig - 3,698 cfm	6 in	44 in / 11.2 in / 12.5 in	25 lb	710-1240
Texas Pneumatic	TX-8-AM	60 psig - 2,560 cfm	80 psig - 3,020 cfm	100 psig - 3,698 cfm	8 in	46.5 in / 14.3 in / 14.3 in	36 lb	710-1260
Texas Pneumatic	TX-10-AM	40 psig - 4,898 cfm	60 psig - 6,182 cfm	80 psig - 7,304 cfm	10 in	48 in / 16.8 in / 15.8 in	43 lb	710-1280
Texas Pneumatic	TX-JF12	60 psig - 2,161 cfm	80 psig - 2,550 cfm	100 psig - 2,866 cfm	12 in	11 in / 12.3 in diameter	41 lb	710-1300
Texas Pneumatic	TX-JF20	60 psig - 7,600 cfm	80 psig - 9,100 cfm	100 psig - 10,420 cfm	20 in	12 in / 24.5 in diameter	96 lb	710-1360
Texas Pneumatic	TX-JF24	60 psig - 11,005 cfm	80 psig - 12,848 cfm	100 psig - 16,136 cfm	24 in	12 in / 31.3 in diameter	131 lb	710-1320



Industrial Project and Tool Management

Tool-Trailer On-sites are designed for either short- or long-term use. In this fully customizable solution, customers are provided with a trailer packed with the tools they need. Customers also have the option of an in-house Herc Rentals technician or coordinator for any needed assistance for orders, tool management, tracking reports and more.

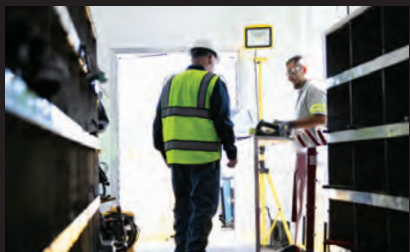



CLIMATE CONTROL



COOLING

- Fans and Blowers
- Evaporative Coolers
- Portable 1-12 Ton AC
- Water Cooled AC
- 5-25 Ton Packaged Units
- 20-80 Ton Industrial Units
- Vertical AC Units
- Chillers
- Air Handlers

HEATING

- Direct Fired
- Electric Heaters
- Indirect Fired
- Industrial Electric
- Radiant / Specialty
- Flameless
- Self-Contained
- Hydronic Surface
- Hydronic Central Heat

DRYING

- LGR Dehumidifiers
- Desiccant Dehumidifiers
- Flood Extractor
- Air Movers
- Air Scrubbers
- Dust Containment

FANS AND BLOWERS

Fans and blowers reduce heat-related injuries, increase comfort and ventilate confined spaces.

Features include:

- Fans are quiet, provide extreme airflow and range—up to 16,600 cfm
- Blowers provide airflow to confined spaces
- Ductable units available

UP TO 16,600 CFM
AIR FLOW



MAKE	MODEL	TYPE	AIR FLOW	DIMENSIONS (LWH)	AMP DRAW	WEIGHT	CAT-CLASS
Master	MB-PO813-DC25	8 inch confined space ventilator with 25 ft of 8 in duct	930 cfm	36.3 in / 12.5 in / 14.5 in	2.2A 115V	16 lb	700-1420
Tempest	24-HD	24 inch high velocity ductable fan	13,000 cfm	28.8 in / 26 in / 34.5 in	13.4A 115V	120 lb	700-1180
Tempest	24-HD-EP	24 inch high velocity ductable fan - explosion proof	13,000 cfm	28.8 in / 26 in / 34.5 in	13.4A 115V	125 lb	700-1240
Schaefer	VKM42-2-B-0	42 inch box fan	16,600 cfm	45.5 in / 22 in / 45.8 in	12.3A 115V	140 lb	925-3126

EVAPORATIVE COOLERS

A flexible cooling solution where traditional air conditioning is ineffective or cost-prohibitive.

Benefits include:

- Effective outside
- Influence air temperature up to 30 degrees

UP TO 14,000 CFM
AIR FLOW
PORTACOOL



MAKE	MODEL	AIR FLOW	DIMENSIONS (LWH)	MOTOR	AMP DRAW	WEIGHT	CAT-CLASS
Portacool	JETSTREAM 230	3,600 cfm	27 in / 29 in / 50 in	3/4 hp	8.3A 115V	108 lb	700-1630
Portacool	JETSTREAM 250	8,500 cfm	30 in / 52 in / 70 in	1 hp	6.6A 115V	191 lb	700-1635
Portacool	JETSTREAM 260	12,500 cfm	30 in / 63 in / 77 in	1.5 hp	9.3A 115V	212 lb	700-1640
Cleva Technologies	Vector	9,000 cfm	20 in / 24 in / 72 in	1 hp	8A 115V	135 lb	700-1632
Cleva Technologies	Spartan	12,500 cfm	48 in / 30 in / 72 in	1-1/4 hp	9A 115V	375 lb	700-1634
Breezer Mobile Cooling	PB10-A-06-B	14,000 cfm	46 in / 29.5 in / 42 in	1 hp	9A 115V	220 lb	700-1280

WATER COOLED AC UNITS

Water cooled AC units are best for areas where it's not possible to exhaust hot air through a ceiling tile, window or ducted opening. Instead of removing the heated air outside the space you're cooling, the heat is transformed to water and externally drained.

Features include:

- Hoses to connect to any standard sink
- Designed to work in extremely hot areas
- No negative air pressure caused by ducting

UP TO 60,000 BTU
COOLING CAPACITY
OCEANAIRE



MAKE	MODEL	CAPACITY	POWER	DIMENSIONS (LWH)	CAT-CLASS
OceanAire	OWC1811	18,000 btu hr	115V 1PH 11.3A	13 in / 24.3 in / 40 in with casters	718-1115
OceanAire	OWC6012	60,100 btu hr	208/230V 1PH 23.7A	29 in / 27 in / 52 in with casters	718-1156
OceanAire	OWC6032	60,100 btu hr	208/230V 3PH 16.5A	29 in / 27 in / 52 in with casters	718-1157
OceanAire	OWC6034	60,100 btu hr	460V 3PH 20A	29 in / 27 in / 52 in with casters	718-1158

PORTABLE 1-5 TON AC UNITS

Designed to cool commercial spaces, portable 1-5 ton AC units require proper venting and most include both heating and cooling to maintain a constant temperature.

Features and applications include:

- Highly efficient and quiet
- Built to fit through doors
- Provides spot cooling in high temperature areas
- Great for offices, industrial plants, server rooms, hospitals and laboratories

UP TO 60,000 BTU
COOLING CAPACITY

MOVINCOOL
OCEANAIRE



MAKE	MODEL	COOLING CAPACITY	HEATING CAPACITY	POWER	DIMENSIONS (LWH)	WEIGHT	CAT-CLASS
MovinCool	Climate Pro X14	1 Ton or 13,200 btu hr	N/A	115V 1PH 11.5A	22 in / 29 in / 48 in	165 lb	718-1100
MovinCool	Climate Pro D12	1 Ton 11,450 btu hr	9,900 btu hr	115V 1PH 13.3A	22 in / 27 in / 47 in	181 lb	718-1102
MovinCool	Climate Pro 18	1.2 Ton or 14,600 btu hr	13,700 btu hr	115V 1PH 20A	21 in / 27 in / 49 in	214 lb	718-1104
MovinCool	Office Pro 60	5 Ton or 60,000 btu hr	N/A	208/230V 1PH 50A	30 in / 52 in / 64 in	623 lb	718-1145
Oceanaire	20ACH 6012	5 Ton or 60,100 btu hr	52,500 btu hr	208-2V 1PH 32A	39.5 in / 27.5 in / 52 in	485 lb	718-1146
Oceanaire	20ACH 6032	5 Ton or 60,100 btu hr	53,500 btu hr	208/230V 3PH 20.4A	40 in / 28 in / 52 in	485 lb	718-1147
Oceanaire	20ACH 6034	5 Ton or 60,100 btu hr	53,500 btu hr	460V 3PH 14.8A	40 in / 28 in / 52 in	520 lb	718-1148
KwiKool	KP05-43H	5 Tons or 60,000 btu	12 kw heat strips or 41,600 btu	460V/20A 3PH	34 in / 60 in / 65 in	764 lb	718-1150
Movincool	Office Pro 63	5 Ton or 60,000 btu hr	N/A	460V 3PH 9.5A	30 in / 52 in / 64 in	705 lb	718-1155
KwiKool	KP05-23H	5 Tons or 60,000 btu	12 kw heat strips or 41,600 btu	230V/50A 3PH	34 in / 60 in / 65 in	764 lb	718-1160
KwiKool	KP05-21H	5 Tons or 60,000 btu	12 kw heat strips or 41,600 btu	230V/50A 1PH	34 in / 60 in / 65 in	760 lb	718-1162

Turnkey Solutions

Don't sweat the set up.

Our team provides superior white glove service and turnkey solutions, including set ups and installs, for any mission critical project.



PORTABLE 5-12 TON AC UNITS

Large, portable commercial air conditioners are designed to provide high-volume conditioned air for indoor or outdoor applications

Features and applications include:

- Ducts are easily extendable
- Target high ambient heat areas
- Can be used for cooling and heating
- Ideal for cooling warehouses, industrial plants or other commercial emergencies

UP TO 102,000 BTU
COOLING CAPACITY

UNITED CoolAir KwiKool
PORTABLE COOLING SYSTEMS



MAKE	MODEL	COOLING CAPACITY	HEATING CAPACITY	POWER	DIMENSIONS (LWH)	CAT-CLASS
United CoolAir	PACH5N3AS15	5 Ton	Up to 15kW	208-230V/3PH 47A	67 in / 30 in / 55 in	718-1160
United CoolAir	PAC12G3A	12 Ton	N/A	208/230V 3PH 73A	64 in / 43 in / 59 in	718-1300
United CoolAir	MACH145G3AS30	12 Ton	102,360 btu	208/230V 3PH 60A	71 in / 78 in / 34.5 in	718-1302
KwiKool	KPO 12-23H	11 Ton	83,300 btu hr	208/230V 3PH 64/58A	64 in / 32 in / 60 in - 8 in Casters	718-1305
KwiKool	KPO 12-43H	11 Ton	83,300 btu hr	460V 3PH 28A	32 in / 64 in / 60 in	718-1310

5-25 TON PACKAGED AC UNITS

Packaged air conditioners provide energy-efficient cooling, heating or dehumidification of recirculated air.

Features include:

- Low ambient fan cycling control
- High- and low-pressure safety switches
- Single point electrical connections

9-72 KW
HEATING CAPACITY



MAKE	MODEL	COOLING CAPACITY	HEATING CAPACITY	MOISTURE REMOVAL	POWER	STATIC PRESSURE	DIMENSIONS (LWH)	WEIGHT	NEMA RATING	CAT-CLASS
CAPS	PPKH-5TD	5 Ton	20 kW	18 lb hr	460V	0.6 in @ 2,000 cfm	6 ft 6 in / 4 ft 4 in / 5 ft 9 in	1,400 lb	4	718-1170
CAPS	PPKH-5TD	5 Ton	9 kW	18 lb hr	460V	0.6 in @ 2,000 cfm	6 ft 6 in / 4 ft 4 in / 5 ft	1,200 lb	7	718-1175
CAPS	PPKH-10TD	10 Ton	36 kW	32 lb hr	460V	2.2 in @ 4,000 cfm	8 ft 5 in / 6 ft / 5 ft 1 in	2,300 lb	4	718-1210
CAPS	PPKH-20TD	20 Ton	N/A	126 lb hr	460V	7.0 in @ 2,800 cfm	8 ft 11 in / 6 ft 7 in / 7 ft 10 in	4,500 lb	4	718-1500
CAPS	PPKH-25TD	25 Ton	72 kW	82 lb hr	460V	2.7 in @ 10,000 cfm	12 ft 8 in / 8 ft 5 in / 5 ft 4 in	4,600 lb	4	718-1610

20-80 TON INDUSTRIAL AC UNITS

Air-conditioning systems like 20-80 ton units include hybrid units and industrial high-static.

Hybrid units provide cooling, heating, dehumidification, 100% return air or 100% outside air operations.

Industrial high-static air conditioners provide cooling and dehumidification of return or outside air operations.

Features and applications include:

- Convenient electrical and duct work connections
- Rental-ready construction, controls, safeties and duct connections
- Stainless steel cabinet construction
- Ideal for petrochemical, food processing, manufacturing, hospitals, data centers, and commercial buildings

120-136 KW
HEATING CAPACITY



MAKE	MODEL	COOLING CAPACITY	HEATING CAPACITY	MOISTURE REMOVAL	POWER	STATIC PRESSURE	DIMENSIONS (LWH)	WEIGHT	NEMA RATING	CAT-CLASS
CAPS	PPKH-20TD	20 Ton	N/A	126 lb hr	460V	7.0 in @ 2,800 cfm	8 ft 11 in / 6 ft 7 in / 7 ft 10 in	4,500 lb	7	718-1505
CAPS	PPKH-40TD-GP	40 Ton	N/A	236 lb hr	460V	5.5 in @ 5,600 cfm	12 ft 9 in / 6 ft 8 in / 8 ft	6,300 lb	4	718-1800
CAPS	PPKH-40TD-XP	40 Ton	N/A	237 lb hr	460V	5.5 in @ 5,600 cfm	12 ft 9 in / 6 ft 8 in / 8 ft	6,600 lb	7	718-1805
CAPS	PPKH-40TD	40 Ton	120 kW	146 lb hr	460V	4.25 in @ 14,000 cfm	16 ft 5 in / 7 ft 8 in / 6 ft 7 in	8,300 lb	4	718-1830
CAPS	PPKH-60TD	60 Ton	136 kW	189 lb hr	460V	4.25 in @ 20,000 cfm	20 ft / 8 ft 5 in / 8 ft 5 in	10,500 lb	4	718-2030
CAPS	PPKH-70-TD	70 Ton	136 kW	295 lb hr	460V	4.25 in @ 22,000 cfm	101 in / 190 in / 102 in	11,700 lb	4	718-2230
CAPS	PPKH-80TD-GP	80 Ton	N/A	493 lb hr	460V	6 in @ 10,000 cfm	18 ft / 6 ft 10 in / 8 ft 4 in	9,800 lb	4	718-2300
CAPS	PPKH-80TD-XP	80 Ton	N/A	493 lb hr	460V	6 in @ 10,000 cfm	18 ft / 6 ft 10 in / 8 ft 4 in	9,800 lb	7	718-2305

VERTICAL AC UNITS

Deliver custom temperature control for temporary or long-term applications.

Features and applications include:

- Dual stage heating and cooling circuits with hot gas bypass
- Easy access return air filter and double deflections supply air grille
- Ideal for tent cooling

20-30 TON
COOLING CAPACITY

UP TO 10,000 CFM



MAKE	MODEL	COOLING CAPACITY	HEATING CAPACITY	MOISTURE REMOVAL	POWER	STATIC PRESSURE	DIMENSIONS (LWH)	WEIGHT	NEMA RATING	CAT-CLASS
CAPS	PPKV-20TD	20 Ton	N/A	95 lb hr	460V	1.25 in @ 8,000 cfm	7 ft 7 in / 3 ft / 8 ft	2,600 lb	4	718-1520
CAPS	PPKV-20TD	20 Ton	72 kW	95 lb hr	460V	1.25 in @ 8,000 cfm	7 ft 7 in / 3 ft / 8 ft	2,600 lb	4	718-1525
CAPS	PPKV-30TD	30 Ton	60 kW	45 lb hr	460V	3 in @ 10,000 cfm	8 ft / 6 ft / 8.6 in	3,100 lb	4	718-1700
Oceanaire	OVAC36034AH	386,746 btu	245,664 btu	Gravity drain with pump option	480V	1.5	95 in / 47 in / 88 in	3,507 lb	100A	718-1700
Oceanaire	OVAC24034AH	267,345 btu	153,540 btu	Gravity drain with pump option	480V	1.5	81 in / 44 in / 82 in	2,544 lb	60A	718-1520

CHILLERS

Self-contained chiller/pump packages are designed and constructed for user-friendly operation and provide state-of-the-art control for your everyday cooling needs.

Features and applications include:

- Staged capacity with precise temperature control
- Shell and tube evaporator
- Applications include petrochemical, food processing, manufacturing, hospitals, data centers, and commercial buildings

30-500 TON
COOLING CAPACITY

150-1,500 GPM



MODEL	COOLING CAPACITY	PUMP SIZE	CAP INLET	POWER	DIMENSIONS (LWH)	WEIGHT	NEMA RATING	CAT-CLASS
PCHH-30TC	30 Ton	150 gpm	6 in	460V	14 ft 10 in / 4 ft 7 in / 5 ft 5 in	4,550 lb	4	718-1750
PCHH-60TC	60 Ton	300 gpm	6 in	460V	17 ft 10 in / 8 ft 5 in / 6 ft 10 in	8,600 lb	4	718-2050
PCHH-100TC	100 Ton	300 gpm	4 in Dixon Quick Connect	460V	17 ft 1 in / 8 ft 4 in / 8 ft 6 in	11,000 lb	4	718-2560
PCHH-200TC	200 Ton	600 gpm	4 in Dixon or 6 in. Flanged	460V	24 ft 4 in / 8 ft 4 in / 8 ft 6 in	20,000 lb	4	718-3060
PCHH-500TC	500 Ton	1,500 gpm	6 in	460V	22 ft 7 in / 8 ft 6 in / 8 ft 4 in	24,000 lb	4	718-3090

AIR HANDLERS

Chilled water air handlers are designed to provide large volume cooling and dehumidification by using a chilled water source.

Features include:


- Quiet operation
- Horizontal includes supply and return air duct connections, VFD controlled indoor air blower

50-140 TON
COOLING CAPACITY



MAKE	MODEL	COOLING CAPACITY	DUCT SIZE	SUPPLY DUCTS	RETURN DUCTS	POWER REQUIREMENTS	STATIC PRESSURE	DIMENSIONS (LWH)	WEIGHT	NEMA RATING	CAT-CLASS
CAPS	PAHH-50TC	50 Ton	20 in	2	4	460V	5 in	100 in / 83 in / 59 in	3,250 lb	4	718-1950
CAPS	PAHH-75TC	75 Ton	20 in	2	4	460V	5 in	108 in / 82 in / 64 in	3,400 lb	4	718-1960
CAPS	PAHH-120TC	120 Ton	20 in	4	6	460V	5 in	144 in / 101 in / 64 in	4,350 lb	4	718-2650
CAPS	PAHV-140TC	140 Ton	20 in	4	8	460V	6.7 in	98 in / 50 in / 102 in	4,200 lb	4	718-2660

CHOOSING THE RIGHT HEATER



HEATING

CLIMATE CONTROL - HVAC



DIRECT FIRED



AVAIL. BTU 111,000-1,500,000

Features:

- No Ducting
- Thermostats

Ideal for:

- Construction Sites
- Warehouses
- Large Open Places



ELECTRIC



AVAIL. BTU 5,100-500,000

Features:

- 100% Clean, Dry Heat
- No Exhaust

Ideal for:

- Construction Sites
- Office Buildings
- Thawing Frozen Pipes



INDIRECT FIRED



AVAIL. BTU 70,000-2,000,000

Features:

- 100% Clean, Dry Heat
- No Open Flames
- Exhaust Vented Outside

Ideal for:

- Construction Sites
- Temporary Structures, Events



FLAMELESS



AVAIL. BTU 448,000-994,000

Features:

- No Open Flames
- Engine Driven
- Maximize Heat Delivery

Ideal for:

- Industrial Sites



SELF-CONTAINED



AVAIL. BTU 770,000-1,200,000

Features:

- Built-in Generator
- Long Distance Ducting
- Flameless Options

Ideal for:

- Ground Thawing
- Ground Frost Prevention



HYDRONIC SURFACE



AVAIL. BTU 234,000-348,000

Features:

- Long Run Times
- Spill Containment
- Self-Contained

Ideal for:

- Ground Thawing
- Concrete Curing

DIRECT FIRED HEATERS

Extend heat into wide areas and provide for a comfortable work environment in the harshest conditions.

Features and applications include:

- Equipped with 100% flame safeguard system
- Ideal for farms, warehouses, workshops, garages, construction sites and winter sports athletes



UP TO 25 HR
RUN TIME

UP TO 19,000 SF
HEATING AREA



MAKE	MODEL	CFM	BTU	HEATING AREA	FUEL TYPE / CAPACITY	VOLTAGE	RUN TIME	DIMENSIONS (LWH)	WEIGHT (DRY)	CAT-CLASS
Heatstar	HS115TC	1,600	111,000	2,875 sq ft	LP/NG / (2) 40 gal/ (1) 100 gal	115V	25/18 hr	30 in / 21 in / 21 in	91 lb	715-0419
Dewalt	DXH170FAVT	450	170,000	3,500 sq ft	Propane / 100 gal external	110V	17 hr	26 in / 12 in / 17 in	31 lb	715-0440
Dewalt	DXH190HD	450	190,000	4,750 sq ft	Kerosene / 14 gal on board	120V	10 hr	40 in / 18 in / 21 in	74 lb	715-0450
Heatstar	HS250TC	2,100	249,000	6,250 sq ft	LP/NG / (2) 100 gal	115V	23/16 hr	33 in / 21 in / 31 in	165 lb	715-0452
Heatstar	HS400FAVT	1,400	400,000	9,000 sq ft	Propane / (2) 100 gal external	120V	17 hr	39 in / 39 in / 22 in	51 lb	715-0460
Heatstar	HS3500DF	1,800	360,000	75,000 sq ft	Diesel/Kerosene / 27.7 gal	115V	9.5 hr	66 in / 27 in / 39 in	227 lb	715-0470
Flagro	F-1500T	7,000	1,500,000	19,000 sq ft	LP/NG / External	115V	N/A	61 in / 29 in / 38 in	314 lb	715-0550

ELECTRIC HEATERS



Provides safe, fast, dry, odorless heat for enclosed spaces.

Features and applications include:

- No need for gas or propane
- 100% clean, dry heat - no moisture
- Ideal for emergency situations like heat loss, thawing of frozen pipes or heating for contractors and special events

1.5-150 KW

UP TO 15,000 SF
HEATING AREA



RENTAL TIP

When renting an electric heater, you will need to determine what type of electrical plug is required on your job site. If you are unsure you can always contact a Herc Rentals ProSolutions representative or an electrician.



MAKE	MODEL	WATTS	CFM	BTU/HOUR	HEATING AREA	VOLTAGE	PHASE	AMP RATING	DIMENSIONS (LWH)	WEIGHT	CAT-CLASS
Campo	EB1.5E	1.5 kW	125	5,100	50 sq ft	120V	1PH	13A	10.88 in / 8.33 in / 12.27 in	13 lb	715-0010
Phoenix	FIREBIRD COMP20	5-20 kW	250	20,000	300 sq ft	120V	1PH	12A-48A	13 in / 12.5 in / 26 in	35 lb	715-0020
Campo	EB6/9E	6-9 kW	550	20,500 / 30,700	750 sq ft	240V	1PH	24.5A 36.5A	23.5 in / 13.5 in / 17 in	45 lb	715-0030
Fostoria	FES-1524-3E	15 kW	800	51,195	2,000 sq ft	240V	3PH	36A	23.2 in / 21.4 in / 39 in	65 lb	715-0040
Fostoria	FES-1548-3E	15 kW	800	51,195	2,000 sq ft	480V	3PH	18A	23.2 in / 21.4 in / 39 in	65 lb	715-0045
Campo	EB18E	18 kW	1200	65,000	1,500 sq ft	208V 240V	1PH 3PH	86A 50A	35.5 in / 17.5 in / 20 in	120 lb	715-0046
Fostoria	FES-3048-3A	30 kW	1,100	102,390	2,000 sq ft	480V	3PH	36A	23.3 in / 22 in / 39 in	83 lb	715-0060
Campo	EB60E	60 kW	4,500	205,000 / 136,500	5,000 sq ft	240V 480V	3PH	144A 72A	51.5 in / 22 in / 35.5 in	300 lb	715-0070
Campo	EB150E480V	150 kW	14,500	512,000	15,000 sq ft	480V	3PH	196A	68 in / 31.5 in / 56 in	950 lb	715-0245

INDIRECT FIRED

Operates like a mobile furnace with a fan forcing hot air over a heat exchanger where internal combustion takes place and with fumes exhausted through a stack.

Features include:

- 100% clean, dry heat with no open flame
- Great for drying and emergency, temporary heating and special events
- Ducting allows units to be placed outside and away from tents while pushing warm air inside

UP TO 2M BTU/H
INPUT PER HOUR



MAKE	MODEL	FUEL TYPE	BTU/H	HEATING AREA	CFM/SP	FUEL TANK	RUN TIME	VOLTAGE	DIMENSIONS (LWH)	WEIGHT (DRY)	CAT-CLASS
Heatstar	HSP70ID	Diesel/K1	70,000	1,750 sq ft	910	11.6 gal	20 hr	120V	48 in / 17 in / 22 in	80 lb	715-0600
Heatstar	HSP100ID	Diesel/K1	122,000	3,050 sq ft	1,060	17 gal	19 hr	120V	48 in / 20 in / 41 in	165 lb	715-0605
Campo	EB200D	Diesel/K1	175,000	5,000 sq ft	3,250 / 3 in	40 gal	32 hr	120V	48.5 in / 30.6 in / 65 in	250 lb	715-0610
Flagro	FVO-200RC	Diesel/K1	200,000	4,700 sq ft	1,500 / 3 in	23 gal	15 hr	115V	53.5 in / 27 in / 39.5 in	280 lb	715-0610
Campo	EB200G	LP/NG	175,000	4,700 sq ft	3,250 / 3 in	External	-	120V	48.5 in / 30.6 in / 65 in	400 lb	715-0615
Flagro	FVNP-200RC	LP/NG	200,000	4,700 sq ft	1,500 / 3 in	External	-	115V	51.5 in / 27 in / 43.5 in	330 lb	715-0615
Campo	EB400D	Diesel/K1	396,000	7,000 sq ft	5,500 / 3 in	42 gal	14.9 hr	115V	76.7 in / 31 in / 57.6 in	550 lb	715-0620
Flagro	FVO-400RC	Diesel/K1	390,000	10,000 sq ft	4,000 / 3 in	42 gal	14 hr	115V	70 in / 29 in / 54 in	455 lb	715-0620
Campo	EB400G	LP/NG	399,000	7,000 sq ft	5,500 / 3 in	External	-	115V	76.7 in / 31 in / 57.6 in	550 lb	715-0630
Flagro	FVNP-400RC	LP/NG	390,000	10,000 sq ft	4,000 / 3 in	External	-	115V	70 in / 29 in / 49 in	470 lb	715-0630
Campo	EB600D	Diesel/K1	588,000	12,000 sq ft	5,500 / 3 in	42 gal	10 hr	120V	76.7 in / 31 in / 57.6 in	600 lb	715-0631
Campo	EB600G	LP/NG	575,000	12,000 sq ft	5,500 / 3 in	External	-	120V	76.7 in / 31 in / 57.6 in	600 lb	715-0632
Campo	BLAZE 1000	DSL/LP/NG	1,000,000	20,000 sq ft	13,500 / 6.5 in	External	-	208V 240V	111 in / 33.3 in / 50 in	2,000 lb	715-0660
Campo	BLAZE 2000	DSL/LP/NG	2,000,000	40,000 sq ft	16,000 / 6.5 in	External	-	208V 240V	144 in / 33.3 in / 67 in	2,950 lb	715-0695

INDUSTRIAL ELECTRIC



Quiet and include a unique high static fan that allows for recirculation of warm inside air, resulting in even temperatures and energy savings in the most demanding environments.

Features and applications include:

- Rugged, weatherproof enclosures for reliable operation outdoors
- Fits through 36-inch door and offers up to 200 feet of ducting
- Ideal for use in no-flame locations and where noise levels must be kept to a minimum

UP TO 500K BTU
COOLING CAPACITY



MAKE	MODEL	CAPACITY	BTU	CFM / SP	VOLTAGE	PHASE	AMP RATING	DIMENSIONS (LWH)	WEIGHT	CAT-CLASS
CAPS	PHUH-ONN-150 KEONN	150 kW	512,000	8,000/5 in	480V	3PH	206A	96 in / 48 in / 50.6 in	2,500 lb	715-0240
Campo	Blaze 150E	150 kW	500,000	14,500 / 6.5 in	480V	3PH	196A	68 in / 31.5 in / 56 in	950 lb	715-0240

RADIANT AND SPECIALITY

Offer infrared heat and forced air heat by adopting a dual heating system. These heaters are lightweight, ultra-portable and can be used anywhere you need to stay warm, inside or out.

Features and applications include:

- Not affected by mist
- Great for industrial, warehouse and warming outdoor construction crews

UP TO 140K BTU
COOLING CAPACITY

HEATSTAR
by EMERCO



MAKE	MODEL	HEAT OUTPUT	FUEL TANK	POWER	FUEL TYPE	DIMENSIONS (LWH)	WEIGHT	CAT-CLASS
HEATSTAR	HSP60R	58,000 btu	2.9 gal	120V	Kerosene	24 in / 15 in / 23 in	21 lb	715-0408
HEATSTAR	HSP125R	102,000/146,900 btu	14 gal	120V	Kerosene	41 in / 30 in / 47 in	149 lb	715-0435

FLAMELESS HEATERS

Capable of ducting long distances with minimal loss of air pressure or outlet temperature. Highly-efficient heated air output with unprecedented safety in portable DOT-approved trailer mounted packages.

Features and applications include:

- Engine driven
- Permitted in “no open flame” areas
- Ideal for oil and gas, mining, construction and restoration industries

UP TO 46 HR
RUN TIME

UP TO 994K BTU
COOLING CAPACITY



MAKE	MODEL	BTU	CFM/SP	FUEL TANK	CONSUMPTION	RUN TIME	DIMENSIONS (LWH)	WEIGHT	CAT-CLASS
MAC	550F	448,000	3,500 / 5 in	125 gal	2.6 gal hr	40 hr	176 in / 72 in / 82 in	3,800 lb	715-1210
MAC	750F	512,400	5,500 / 5 in	165 gal	3.55 gal hr	46 hr	192 in / 72 in / 85 in	5,720 lb	715-1220
Thawzall	XHR750	512,400	3,000-7,000	220 gal	7 gal hr	31 hr	15 ft 6 in / 8 ft / 6 ft 6 in	8,417 lb	715-1220
MAC	950F	994,000	6,000 / 5 in	165 gal	5.4 gal hr	30 hr	192 in / 72 in / 85 in	5,650 lb	715-1230

SELF-CONTAINED HEATERS

Provides powerful, clean, safe and reliable air and allows for ducting over long distances with minimal loss of pressure or temperature.

Features and applications include:

- Multi-zone layout creates higher return temperatures
- Ideal for ground thawing, cold weather concrete warming/curing, pre-pour warming, ground frost prevention

UP TO 1.2M BTU
COOLING CAPACITY



MAKE	MODEL	BTU	CFM/SP	FUEL TANK	CONSUMPTION	RUN TIME	DIMENSIONS (LWH)	WEIGHT	CAT-CLASS
Wacker	HI 770XHD	770,000	4,000 / 4 in	235 gal	5.5 gal hr	40 hr	187 in / 94 in / 88 in	5,700 lb	715-0810
MAC	800G	800,000	3,900 / 3 in	175 gal	5.7 gal hr	31 hr	186 in / 2 in / 87 in	4,620 lb	715-0810
CAMPO	EB1000CT	1,000,000	13,500 / 7.5 in	300 gal	8.1 gal hr	42 hr	228 in / 74.5 in / 98 in	5,200 lb	715-0820
MAC	1.2G	1,200,000	6,500 / 3 in	270 gal	8.6 gal hr	31 hr	252 in / 96 in / 103 in	7,000 lb	715-0820
Allmand	MAXI-HEAT 1MBTU	1,030,000	3,530 / 3.1 in	210 gal	5.98 gal hr	35 hr	184 in / 8 in / 84 in	3,625 lb	715-0813

HYDRONIC SURFACE HEATERS

Designed to operate on remote job sites. Their powerful burners heat up fluid that is pumped through a small hose and up to 3,000 feet in length.

Features and applications include:

- Long, extended run times
- On-board fuel heater
- Spill containment and safety shut down sensors
- Ground thawing, cold weather concrete warming/curing, pre-pour warming, ground frost prevention

UP TO 140 HR
RUN TIME

UP TO 605K BTU
HEATING CAPACITY



MAKE	MODEL	BTU	THAWING CAPACITY	CURING CAPACITY	EFFICIENCY	FUEL TANK	FUEL CONSUMPTION	RUN TIME	DIMENSIONS (LWH)	WEIGHT	CAT-CLASS
THAWZALL	TCH250	234,000	6,000 sq ft	18,000 sq ft	82%	160 gal	1.75 gph	72 hr	170 in / 84 in / 96 in	5,600 lb	715-1010
Flex-Temp	FUSION3000	234,000	6,000 sq ft	18,000 sq ft	87%	170 gal	1.75 gph	97 hr	178.5 in / 96 in / 91 in	8,295 lb	715-1010
Wacker	E3000	385,000	6,000 sq ft	18,000 sq ft	83%	230 gal	2.75 gph	140 hr	181 in / 91 in / 94 in	7,190 lb	715-1020
DryAir	400GTS	348,000	4,500 sq ft	6,000 sq ft	83%	150 gal	2.45 gph	60 hr	188 in / 76 in / 98 in	5,950 lb	715-1020
Heat King	HK300	311,000	2,800-5,600	5,600-11,200	82%	192 gal	2.24 gph	120 hr	14 in / 86 in / 83 in	7,835 lb	715-1020
Heat King	HK600	605,000	5,600-11,200	11,200-22,400	82%	192 gal	4.44 gph	60 hr	65 in / 75 in / 84 in	9,070 lb	715-1030

HYDRONIC HEATERS

Self-contained trailer-mounted hydronic heaters are designed to provide domestic and process hot water

Features include:

- The two plate heat exchangers can also heat two different fluids simultaneously.
- Tri-fuel capable (diesel, natural gas and propane)

UP TO 1.8M BTU
HEATING CAPACITY



MAKE	MODEL	BTU	FUEL CONSUMPTION			DIMENSIONS (LWH)	WEIGHT	CAT-CLASS
DryAir	1800 HHP	1,792,000	Diesel 12.8 gph	Natural Gas 1,577 cfh	Propane 18.7 gph	212 in / 93.5 in / 114 in	9,000 lb	715-1082

HYDRONIC CENTRAL HEAT

This heater is for the most challenging heating projects whether it's providing temporary heat for construction sites or renovation projects in high rises, strip malls, schools or hospitals.

Features and applications include:

- Modular plug and play design
- Can be converted to natural gas or propane
- Thawing and curing can take place while also heating structures
- Ideal for ground thawing, concrete curing, dehumidification or fluid heating

UP TO 40,000 SF

UP TO 1.2M BTU
HEATING CAPACITY







MAKE	MODEL	BTU	HEAT CAPACITY	THAWING CAPACITY	CURING CAPACITY	DIMENSIONS (LWH)	WET WEIGHT	DRY WEIGHT	CAT-CLASS
DryAir	CHU-1200	1,200,000	40,000 sq ft	18,000 sq ft	48,000 sq ft	64 in / 57 in / 79 in	4,100 lb	2,800 lb	715-1080
MAKE	MODEL	TYPE	POWER REQUIREMENTS	FLUID LINE	OUTPUT	BTU	WEIGHT	CAT-CLASS	
DryAir	HEFA80	Portable heat exchanger	120V 3.7A	3/4 in	900 cfm	80,187	90 lb	715-1210	
DryAir	HEFA200	Portable heat exchanger	120V 12.7A	1 in	2,300 cfm	206,364	210 lb	715-0100	

Any job, Any size, Anywhere!

Herc Rentals Emergency Response Team stands ready 24/7 to deliver the drying or climate control equipment critical to your recovery efforts following a catastrophic event. With a variety of delivery options based on the quantity of equipment needed for the cleanup, be it a leaking pipe in a home to drying, cooling or heating an entire distribution center, Herc Rental's Climate Remediation Centers (CRC) have the gear you need to tackle the job effectively, efficiently and safely.



	13 PORTABLE COOLING with heat option	24-34 PORTABLE COOLING with heat option	72 PORTABLE COOLING with heat option
	8-10 LGR DEHUMIDIFIERS Removes 64-80 gallons of moisture per day	30-40 LGR DEHUMIDIFIERS Removes 480-640 gallons of moisture per day	180 LGR DEHUMIDIFIERS Removes 5,724 gallons of moisture per day
	20-30 AIR MOVERS Total of 18,000-26,000 CFM	70-100 AIR MOVERS Total of 227K-325K CFM	400 AIR MOVERS Total of 354,000 CFM
	20-30 AIR SCRUBBERS Total of 10,000-15,000 CFM	75 AIR SCRUBBERS Total of 37,000 CFM	368 AIR SCRUBBERS Total of 185,000 CFM

FLOOD EXTRACTOR

High vacuum and powerful lift pulls maximum water from carpet and pad.

Features and applications include:

- A high flow, high volume clog-resistant sump pump handles up to ½ inch solids.
- Dual vacuum blowers with 2 inch inlet ensures maximum airflow
- Use the large toilet-height gravity drain for small jobs and easy tank cleanout
- Exhaust air passes through HEPA filter. Helps to prevent the spread of contaminants and odors

UP TO 50 GPM
12 GAL
TANK CAPACITY



MAKE	MODEL	WATER REMOVAL	TANK	POWER REQUIREMENTS			DIMENSIONS (LWH)	WEIGHT	CAT-CLASS
Dri-Eaz	HVE 3000	50 gpm	12 gal	120V 1PH	12A (Blower 1 + Pumpout)	135A (+Blower 2)	22.5 in / 40.2 in / 23.6 in	132 lb	105-1800

LGR DEHUMIDIFIERS

Remove large amounts of water, moisture and prevent mold with LGR dehumidifiers.

Features and applications include:

- Built-in humidistat
- Self-monitoring system
- Applications include restoration from water damage and construction drying

UP TO 29.3 GPD
12 GAL
TANK CAPACITY



MAKE	MODEL	MOISTURE REMOVAL (MAX)	MOISTURE REMOVAL (AT AHAM)	CFM RATING	AMP RATING	DIMENSIONS (LWH)	WEIGHT	CAT-CLASS
Dri-Eaz	Revolution LGR	10.1 gpd	8 gpd	121-180	6.2	22 in / 18 in / 13 in	65 lb	719-2020
Dri-Eaz	7000XLI	29.3 gpd	16.2 gpd	325	8.3	20 in / 20 in / 33.5 in	107 lb	719-2040

DESICCANT DEHUMIDIFIERS



*Eco Clean options available

Desiccant dehumidifiers remove moisture from the air using the chemical desiccant, thereby preventing corrosion, mold and mildew formation.

Features and applications include:

- More effective at very low temperatures than refrigerator coil style units
- Electric, gas and propane models are available
- Ideal for water damage restoration, construction drying and industrial condensation prevention

395-17,500 CFM
UP TO 1,272 GPD



MAKE	MODEL	MOISTURE REMOVAL (MAX)	MOISTURE REMOVAL (AT AHAM)	CFM RATING	AMP RATING	DIMENSIONS (LWH)	WEIGHT	CAT-CLASS
Arid-Dry	MS-2400	230 gpd	158 gpd	2,400	60	92 in / 35 in / 63 in	1,110 lb	719-1010
Arid-Dry	MS-7500	735 gpd	577 gpd	7,500	179	100 in / 50 in / 96 in	4,400 lb	719-1030
Arid-Dry	MS-18000/15000	1,272 gpd	1,061 gpd	17,500	345	140 in / 100 in / 101 in	9,500 lb	719-1040

AIR MOVERS

Air movers are an essential component of the drying process and water damage restoration.

Features and applications include:

- Very low amp draw
- Easily portable
- Stackable for easy storage
- Ideal for drying floors, ceilings, walls and stairways

885-1,881 CFM



MAKE	MODEL	CFM	AMPS	DIMENSIONS (LWH)	WEIGHT	CAT-CLASS
Dri-Eaz	Ace TurboDryer	1,881	1.5	19 in / 24 in / 20.3 in	33 lb	925-3263
Dri-Eaz	Velo Airmover	885	1.9	24 in / 9 in / 18 in	21 lb	925-3250

AIR SCRUBBERS



Air scrubbers remove particles, gases and chemicals from the air.

Features and applications include:

- Transports and stores easily due to compact design
- Excellent for mold abatement, restorations, construction, renovation and industrial applications

UP TO 5,000 CFM



MAKE	MODEL	MAX CFM	FILTRATION	POWER	DIMENSIONS	WEIGHT	CAT-CLASS
Dri-Eaz	DefendAir HEPA 500	500	2-Stage	115V 3A	18.2 in / 26.2 in / 24.6 in	44 lb	925-3310
Abatement Technologies	PRED750	750	3-Stage	115V 1.9A	25.5 in / 19.5 in / 20.5 in	35 lb	925-3312
Abatement Technologies	BD2KM	2,000	3-Stage	115V 10A	39.5 in / 28.5 in / 31.7 in	117 lb	925-3316
Abatement Technologies	PAS2400	2,100	4-Stage	115V 12A	31.5 in / 25.3 in / 49.8 in	170 lb	925-3318
International Ozone	TITAN 4000	5,000	N/A	115V 4A	26 in / 26 in / 12 in	38 lb	700-1725
Husqvarna	A 1200	1,200	2-Stage	120V 4.9A	18 in / 27.5 in / 32 in	84 lb	925-3314



Turnkey Solutions

Don't sweat the set up.

Our team provides superior white glove service and turnkey solutions, including set ups and installs, for any mission critical project.



CONTAINMENT CART



Containment carts protect patients, visitors, and hospital staff. It's the perfect solution to combat airborne particles released during ceiling cavity work.

Features and applications include:

- Comes with HEPA air scrubber
- Ideal for computer cable and electrical wiring installation, HVAC equipment and ductwork, air filter change outs and much more



MAKE	DESCRIPTION	CAT-CLASS
AG8000PAS-RPM	Containment cart with HEPA scrubber	700-2100

Get the app




Download on the App Store



GET IT ON Google Play

Search and filter for better results

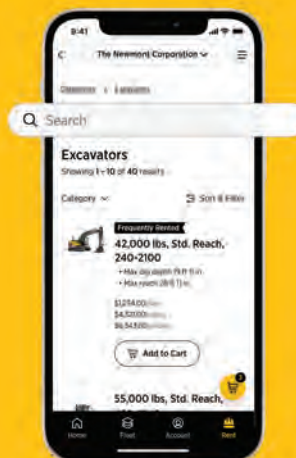

Product details under your thumb





COMPACTION AND PAVING




Plate Compactors
Rammers
Walk-behind Rollers
Ride-on Asphalt Rollers
Ride-on Soil Rollers

COMPACTION AND PAVING

APPLICATION GUIDE



Granular Soils

Consisting of small grains or particles.



Use a vibratory plate or smooth drum vibratory roller.




Cohesive Soils

Clay, or soil with a high clay content.



Use a rammer or vibratory roller with a sheep's foot drum.



Asphalt

Bituminous pitch with sand or gravel, used for surfacing roads.



Use a vibratory plate or smooth drum vibratory roller.

COMPACTION AND PAVING

CONFINED AREA

SAND/GRAVEL

SINGLE DIRECTION PLATES

For smaller areas and shallow lifts less than 12 in



SOIL

RAMMERS

For excavations 4 to 24 in wide, or adjacent to structures



ASPHALT

SINGLE DIRECTION PLATES

For asphalt, patches and edging along curbs, light poles, etc.



LARGER AREA

REVERSIBLE PLATES

For areas with lifts deeper than 12 in



SMOOTH DRUM ROLLERS

For parking lots, sidewalks, etc.



SHEEPSFOOT ROLLER

For excavations 24 in wide, or adjacent to structures



RIDE-ON ROLLER

Compaction of asphalt, gravel sub base, driveways and more



PLATE COMPACTORS

Designed to smooth and level the ground, with a vibrating, pounding action to flatten the ground in preparation for paving, landscaping or more.

Features and applications include:

- Innovative guide handles limit vibration
- Reversible plate compactor
- Multi-directional plate compactor
- Ideal for road, path, driveway and parking lot construction, compaction of interlocking paving stones, sand, gravel and cohesive soils

UP TO **100 FPM**



MAKE	MODEL	CENTRIFUGAL FORCE	BASE PLATE (LW)	FUEL	FWD/REV SPEED	DIMENSIONS (LWH)	WEIGHT	CAT CLASS
Wacker Neuson	WP1550AW	3,375 ibf	19.5 in / 23 in	Gas	0-100 fpm	34.5 in / 19.5 in / 38 in	194 lb	150-1260
Multiquip	MVC88VTHW	3,372 ibf	20.7 in / 19.7 in	Gas	0-82 fpm	41.75 in / 19.5 in / 37 in	229 lb	150-1260
Wacker Neuson	BPU3050A	6,750 ibf	34.4 in / 17.7 in	Gas	0-69 fpm	30.1 in / 22.4 in / 51.4 in	366 lb	150-1460
Wacker Neuson	BPU4045A	8,992 ibf	35.4 in / 17.7 in	Gas	0-79 fpm	30.7 in / 59.5 in / 41.7 in	710 lb	150-1540
Multiquip	MVH308GH	10,116 ibf	34 in / 18 in	Gas	0-79 fpm	61 in / 24 in / 48 in	717 lb	150-1540
Wacker Neuson	DPU6555HE	14,612 ibf	34 in / 21.7 in	Diesel	0-92 fpm	30.7 in / 59.5 in / 41.7 in	1,091 lb	150-1580

RAMMERS

Designed for compaction of cohesive and mixed soils in confined areas, unlike plate compactors, rammers work best when compacting cohesive soils.

Features and applications include:

- Unique 3-stage air filtration system provides a virtually dust-free engine
- Shock-mount handle system reduces hand-arm vibration
- Battery powered options available for indoor and sound-sensitive applications
- Ideal for landscapers and electrical and plumbing contractors

UP TO **699 BPM**



MAKE	MODEL	FUEL	IMPACT/FORCE	HP	SHOE SIZE (WXL)	MAX BPM	MAX STROKE	WEIGHT	CAT CLASS
Multiquip	MTR40SF	Gas	1,215 ibf	2.8	5.9 in x 10.6 in	699	2.2	101 lb	150-1060
Wacker Neuson	BS50-4AS	Gas	3,597 ibf	3.2	11 in x 13 in	656	2.4	143 lb	150-1070
Multiquip	MTX70HD	Gas	3,350 ibf	2.8	11.2 in x 13.4 in	690	3.1	165 lb	150-1080
Wacker Neuson	BS60-4AS	Gas	4,050 ibf	3.2	11 in x 13 in	690	3.1	158 lb	150-1080
Wacker Neuson	AS50E	Battery	3,597 ibf	2.8	11 in x 13.4 in	680	1.7	155 lb	150-1120

WALK-BEHIND ROLLERS

Delivering a powerful soil and asphalt compaction force making them ideal for road construction, patching asphalt and more.

Features and applications include:

- Variable speed control in forward and reverse
- Dual sprinkler controls wet drums individually
- Safety system and ergonomic handle reduces vibration as well as operator fatigue

22-32 IN
DRUM WIDTH



MAKE	MODEL	DRUM WIDTH	DRUM TYPE	GRADEABILITY	CENTRIFUGAL FORCE	DIMENSIONS (LWH)	WEIGHT	CAT CLASS
Wacker Neuson	RD7A	25 in	Smooth	40%	4,998 lb high / 2,935 lb low	93.1 in / 27.5 in / 45.7 in	1,512 lb	150-2020
Wacker Neuson	RTKX-SC3	22 in / 32 in adjustable drum	Trench roller	50%	15,400 lb high / 7,700 lb low	73 in / 50 in / 32 in	3,235 lb	150-2260
Multiquip	MRH800GS	25 in	Smooth	30%	3,400 lb	72 in / 41 in / 91 in	2,689 lb	150-2020

RIDE-ON ASPHALT ROLLERS

Highly efficient and designed to increase performance and reduce fuel consumption on small scale compaction projects.

Features and applications include:

- Tier 4 Final emissions
- 360 degrees of visibility
- Reduced fuel consumption

35-47 IN
DRUM WIDTH



MAKE	MODEL	DRUM WIDTH	DRUM TYPE	GRADEABILITY	CENTRIFUGAL FORCE	DIMENSIONS (LWH)	WEIGHT	CAT CLASS	PAD FOOT CAT CLASS
Wacker Neuson	RD12A-90	35 in	Smooth double drum	30%	3,400 lb	72 in / 41 in / 91 in	2,689 lb	150-2820	N/A
Volvo	DD25BW	47 in	Smooth double drum	30%	6,227 - 9,127 lb	95.3 in / 50.8 in / 116.3 in	5,445 lb	150-2860	150-2860

RIDE-ON SOIL ROLLERS

Versatile machines that efficiently and effectively compact varying soils and aggregates in both small and large residential, commercial, and industrial site operations..

Features and applications include:

- Fully integrated traction system increases stability
- Vibration frequency can be adjusted without leaving the cab
- Ideal for road projects, commercial and residential site development, utility installations, driveways and landscaping jobs

54-84 IN
DRUM WIDTH



MAKE	MODEL	DRUM WIDTH	DRUM TYPE	FUEL	GRADEABILITY	CENTRIFUGAL FORCE	DIMENSIONS (LWH)	WEIGHT	CAT CLASS	PAD FOOT CAT CLASS
Volvo	SD45B	54 in	Smooth single drum	Diesel	45%	16,800-22,300 lb	164.6 in / 61 in / 111.4 in	10,910 lb	150-2730	150-2950
Volvo	SD75B	66 in	Smooth single drum	Diesel	65%	21,600 - 29,700 lb	198.6 in / 72 in / 115.1 in	15,400 lb	150-2760	150-2960
Volvo	SD115B	84 in	Smooth single drum	Diesel	65%	54,400 - 58,050 lb	239.8 in / 90 in / 118.1 in	25,651 lb	150-2770	150-2970



**We'll give you the tools...
you provide the talent**

Learn more at careers.hercrentals.com



CONCRETE AND FLOORING



CONCRETE

Concrete Scanner
Rotary Drills
Electric Breakers
Core Drills
Handheld Cutoff Saws
Walk-behind Saws
Tile Saws
Buggies
Mixers
Trowels
Vibrators

FLOORING


Scrapers
Grinders
Shot Blasters
Scarifiers
Planers
Scabblers
Vacuums
Sanders
Buffers
Buffer Pads
Burnishers
Burnisher Pads
Sweepers
Scrubbers
Detergents
Attachments




What is Silica?

Silica is a common mineral found in materials we use for roads, buildings, and sidewalks. Exposures to silica dust can occur when cutting, drilling or crushing concrete, brick, or stone.

OSHA has reduced the permissible exposure limit of respirable crystalline silica averaged over an 8-hour shift by five times.



250Ug/m³
Micrograms
per Cubic Meter of Air



50Ug/m³
Micrograms
per Cubic Meter of Air

Why?

Evidence shows exposure to silica dust can lead to silicosis and lung cancer.

How?

OSHA's Table 1 provides solutions based on common construction site applications, offering the most simple methods of compliance.



Table 1—Specified Exposure Control Methods When Working With Materials Containing Crystalline Silica

Compliance Starts Here

The OSHA ruling on respirable silica dust creates new standards for how dust must be managed in the workplace, affecting nearly every construction site application.

Herc Rentals makes it easy to protect your workforce, comply with new OSHA regulations, and maximize productivity on the job with our full line of dust control solutions.

Go Dustless

- Increase productivity
- Reduce cleaning time
- Maintain a more comfortable work environment

Increase Efficiency

- Reduce tool downtime
- Extend consumable usable life
- Increase visibility

Maximize Protection

- Avoid exposure to silica dust
- Prevent negative long term health effects
- Comply with OSHA regulations

Herc Rentals has the equipment and expertise needed to achieve optimal performance safely, efficiently and effectively.

Visit your local Herc Rentals branch today and ask about our OSHA compliant solutions.

How We Can Help?

Create exposure control plans

Herc Rentals can provide exposure control plan templates for the most common work site applications.




Designate a key competent person

Our training team can partner with your site supervisor to ensure they are fully aware of the new standard and its requirements.

Limit housekeeping practices

Sweeping can unnecessarily expose workers to silica dust. Herc Rentals has the vacuum systems needed to safely collect and contain silica dust.

DUST CONTROL - QUICK REFERENCE CHART

APPLICATION	EQUIPMENT	ACCESSORIES	VACUUM
Drilling and Chiseling SDS	<p>TE 7-C CAT CLASS 100-1090</p>  <p>TE30-A CAT CLASS 100-1050</p>  <p>*Any SDS+ equipment</p>	<p>Hollow Drill Bit MODEL TE-CD</p>  <p>DRS-S CAT CLASS 902-2521</p> 	
Drilling and Chiseling SDS Max	 <p>TE 70 - ATC CAT CLASS 100-1140</p> <p>*Any SDS Max equipment</p>	<p>Hollow Drill Bit MODEL TE-YD</p>  <p>DRS-Y CAT CLASS 902-2518</p> 	<p>VC 150-10 XE CAT CLASS 105-1715</p> 
Breaking	<p>TE800 - AVR CAT CLASS 100-1250</p> <p>TE1000 - AVR CAT CLASS 100-1260</p> <p>TE - 1500 AVR CAT CLASS 100-1270</p> 	 <p>DRS-B CAT CLASS 902-2515</p>	
Breaking	 <p>TE 2000 CAT CLASS 100-1270</p> <p>TE 3000 CAT CLASS 100-1300</p>	 <p>DRS-3000 CAT CLASS 902-2527</p>	
Grinding	 <p>DG 150 CAT CLASS 100-4570</p>	 <p>Vacuum Hose Adapter INCLUDED WITH THE DG 150</p>	<p>VC 300-17 X CAT CLASS 105-1745</p> 
Floor Grinding and Scarifying	<p>PG280 CAT CLASS 100-4230</p> <p>CPM-8-9H CAT CLASS 100-4310</p> <p>2EC-NG-1.5 CAT CLASS 100-4220</p> 		<p>VORTEX 200 CAT CLASS 105-1725</p> 
Coring	<p>DD 150-U CAT CLASS 100-1440</p> <p>DD 200 CAT CLASS 100-1470</p> 	 <p>DD VP-U CAT CLASS 800-5021 NO CHARGE ACCESSORY</p>	<p>WMS-100 CAT CLASS 105-1705</p> 
Sawing	 <p>DCH 300 CAT CLASS 100-2700</p>		<p>VC 300-17 X CAT CLASS 105-1745</p> 
Sawing	 <p>TS 420 CAT CLASS 100-2730</p>	 <p>Pressurized Water Tank CAT CLASS 903-2412</p>	

CONCRETE SCANNER

Provides real-time view of the inside of concrete and generates accurate images automatically. Locates rebar, post tension cable, metal and plastic conduits, glass-fiber cables, voids and wood in dry concrete structures

12 IN
SCAN DEPTH
HILTI



MAKE	MODEL	POWER	SCAN DEPTH	RUN TIME	LOCALIZED ACCURACY	ACCURACY OF DEPTH INDICATED	DIMENSIONS (LWH)	WEIGHT	CAT CLASS
Hilti	PS 1000-B	Li-Ion battery - rechargeable	12 in	4 hr	+/- 0.5 in	< 4 in: +/- 0.5 in > 4 in: +/- 15% in	12.5 in / 5.6 in / 7.5 in	5.4 lb	100-1410

ROTARY HAMMERS

Ergonomically designed drills offer the unmatched power you need for efficiently chiseling and drilling holes into concrete and masonry.

Features include:

- Lightweight rotary hammer for chiseling and drilling
- Virtually dustless with DRS-S and DRS-Y dust collection systems

8-22 LB
WEIGHT CLASS
HILTI



MAKE	MODEL	TYPE	DRILLING CAPACITY	ACCESSORY	SPEED	IMPACT FREQUENCY	POWER	WEIGHT	CAT CLASS
Hilti	TE 7-C	Rotary hammer	1/4-5/8 in	SDS-plus	0-740 rpm	4,020 ipm	120V 1PH 6.3A	8 lb	100-1090
Hilti	TE 70-ATC-AVR	Combi hammer	1/2-6 in	SDS-Max	0-360 rpm	2,760 ipm	120V 1PH 15A	22 lb	100-1140

ELECTRIC AND BATTERY BREAKERS



Designed to demolish concrete floors and walls.

Features and applications include:

- Exceptionally low tool vibration
- Demolition of concrete slabs and foundations, roads, pipes and removing concrete for rebar connections and utility connections

23-66 LB
WEIGHT CLASS
HILTI



MAKE	MODEL	MAX IMPACT	ACCESSORY	IMPACT FREQUENCY	POWER	LENGTH	WEIGHT	CAT CLASS
Hilti	TE 800-AVR	15 ft lb	TE-Y	1,890 ipm	120V 1PH 15A	23 in	23 lb	100-1250
Hilti	TE 1000-AVR	19 ft lb	TE-S	1,950 ipm	120V 1PH 15A	23 in	26 lb	100-1260
Hilti	TE 2000-AVR	26 ft lb	TE-S	1,800 ipm	120V 1PH 15A	29 in	32 lb	100-1270
Hilti	TE 2000-22	28 ft lb	TE-S	1,800 ipm	22V Battery	33 in	38 lb	100-1275
Bosch	BH2770VCD	43 ft lb	1-1/8 in Hex	1,000 ipm	120V 1PH 15A	30.75 in	63.2 lb	100-1300
Hilti	TE 3000-AVR	50.4 ft lb	TE-H Hex	860 ipm	120V 1PH 15A	32 in	66 lb	100-1300

CORE DRILLS

Perfect tool for applications where either the core needs to be preserved or removed.

Features include:

- Wet and dry applications
- Adjustable side handle with integrated dust and water management

1/2-18 IN
CAPACITY
HILTI



MAKE	MODEL	TYPE	CAPACITY	AMP RATING	MOTOR	POWER	SPEEDS	WEIGHT	CAT CLASS
Hilti	DD 150U	Handheld drill rig	1/2-6 in (handheld 0-3 in)	19.5A	3-speed	120V 1PH 19.5A	780/1,520/2,850 rpm	47 lb	100-1440
Hilti	DD 250E	Core drill with stand	1/2-18 in	19.5A	3-speed	120V 1PH 19.5A	780/1,520/2,850 rpm	81 lb	100-1470

HANDHELD CUTOFF SAWS



*Eco Clean options available

These lightweight saws are built to minimize vibrations while powering through hard material like asphalt, concrete, rebar, iron and steel.

12-16 IN
BLADE SIZES

4³/₄-16 IN
CUTTING DEPTH



PORTABLE WATER TANK

Provides water flow for wet-cutting attachments when pressurized water hose is not available.

2.6 Gallon | CAT CLASS: 903-2414

MAKE	MODEL	VACUUM REQUIRED	POWER	MAX BLADE SIZE	MAX CUTTING DEPTH	WEIGHT	CAT CLASS
Hilti	DCH 300	300 cfm	120V 1PH 20A	12 in	4-3/4 in	20 lb	100-2700
Hilti	DSH 600-22	N/A	22V	12 in	4-3/4 in	19.6 lb	100-2705
Hilti	DSH 600-X	N/A	Gas	12 in	4-3/4 in	21.7 lb	100-2720
Hilti	DSH 700-X	N/A	Gas	14 in	5 in	23.5 lb	100-2730
Stihl	TS 420	N/A	Gas	14 in	4.9 in	21.2 lb	100-2730
Stihl	TS 800	N/A	Gas	16 in	5.6 in	28 lb	100-2740
Husqvarna	K 760 Cut-n-Break	N/A	Gas	9 in	16 in	21 lb	100-2780
Husqvarna	K 4000 Cut-n-Break	N/A	120V 1PH 15A	9 in	16 in	18.5 lb	100-2775

WALK-BEHIND SAWS

These low vibration walk-behind saw cut through concrete, asphalt, marble and stone.

6-36 IN
BLADE SIZES

1¹/₈-14³/₄ IN
CUTTING DEPTH



MAKE	MODEL	DRIVE	FUEL	BLADE SIZE	CUTTING DEPTH	DIMENSIONS (LWH)	WEIGHT	CAT CLASS
Husqvarna	Early Entry Soff Cut 150	Push	Gas 4.3 hp	6 in	1-1/8 in	68 in / 19 in / 33.5 in	87 lb	100-2950
EDCO	SK-14-13H	Push	Gas 13 hp	14 in	4-3/4 in	48 in / 23 in / 38 in	190 lb	100-2810
Husqvarna	FS513	Self-propelled	Gas 11.7 hp	20 in	7 in	66.93 in / 24 in / 47.24 in	470 lb	100-2820
Husqvarna	FS524	Self-propelled	Gas 20 hp	24 in	9-7 in	68.9 in / 26 in / 47.25 in	527 lb	100-2840
Husqvarna	FS3500 G	Self-propelled	Gas 37 hp	30 in	12-3/4 in	56 in / 32 in / 45 in	972 lb	100-2850
EDCO	DS18-5B	Self-Propelled	Electric	18 in	6-3/4 in	50 in / 24.5 in / 39 in	265 lb	100-2870
Husqvarna	FS5000D	Self-propelled	Diesel 47 hp	36 in	14-3/4 in	56 in / 33.125 in / 51 in	1,700 lb	100-2910

TILE AND MASONRY SAWS



*Eco Clean options available

Cut through blocks, bricks, pavers, tile and stone with these lightweight, precise, fast and easy to set up tile saws.

10-14 IN
BLADE SIZES

3-5 IN
CUTTING DEPTH



MAKE	MODEL	POWER	HP	BLADE SIZE	CUTTING DEPTH	CUTTING LENGTH	WEIGHT	CAT CLASS
Imer	Combicut 250VA	120V 1PH 15A	1.75 hp	10 in	3-3/4 in	28 in	85 lb	100-3220
Husqvarna	MS 360	120V 1PH 15A	1.5 hp	14 in	5 in	15 in	139 lb	100-3070
Husqvarna	MS 360G	Gas	4.8 hp	14 in	5 in	17-3/4 in	170 lb	100-3080

CONCRETE BUGGY-PUSH

Designed to transporting concrete built with front rocker for easy dumping

Features include:

- 4.00 X 18 4 PLY Tubed Implement Tires Standard

6 CU FT
TUB CAPACITY



MAKE	MODEL	TYPE	CAPACITY	DIMENSIONS (LWH)	WEIGHT	CAT CLASS
Gar-Bro	706-R	Walk-behind rocker cart	6 cu ft	61 in / 32 in / 32 in	170 lb	100-1850

CONCRETE BUGGIES-POWERED



*Eco Clean options available

Designed to hold, carry and remove concrete and other debris from work sites.

8-16 CU FT
TUB CAPACITY



Watch these carts in action



MAKE	MODEL	TYPE	CAPACITY	PAYLOAD	FUEL	DIMENSIONS (LWH)	WEIGHT	CAT CLASS
Overland	EC-C600-8FP	Wheeled walk-behind	8 cu ft	750 lb	Battery	62 in / 34 in / 38 in	289 lb	100-1862
Multiquip	TB12PE	Wheeled walk-behind	12 cu ft	1,100 lb	Battery	70.3 in / 33.4 in / 41.9 in	529 lb	100-1864
Multiquip	WBH-16	Wheeled ride-on platform	16 cu ft	2,500 lb	Gas	103 in / 44 in / 51 in	1,135 lb	100-1870
Toro	MB TX 2500	Tracked ride-on platform	16 cu ft	2,500 lb	Gas	105.5 in / 35.5 in / 47.7 in	1,640 lb	100-1890

MIXERS



*Eco Clean options available

Gas or electric powered concrete or mortar mixers for smaller jobs.

Features include:

- Polyethylene drums for easy cleaning
- Easy-tilting drum makes for accurate placement of materials

3-9 CU FT
DRUM CAPACITY



MAKE	MODEL	TYPE	POWER	CAPACITY	DRUM TYPE	DIMENSIONS (LWH)	WEIGHT	CAT CLASS
Multiquip	MC3PEA	Concrete	120V 1PH	3 cu ft	Poly	48.5 in / 23.5 in / 34 in	138 lb	100-1620
Imer	Wheelman II	Concrete	120V 1PH	5 cu ft	Poly	52 in / 28 in / 57 in	101 lb	100-1620
Imer	Mortarman 120	Plaster/mortar	120V 1PH	4.25 cu ft	Poly	33 in / 30 in / 50 in	286 lb	100-1720
Multiquip	MC94PH8	Concrete	Gas 7.9 hp	9 cu ft	Poly	102 in / 51 in / 59 in	656 lb	100-1690
Multiquip	WM90PH8	Plaster/mortar	Gas 7.9 hp	9 cu ft	Poly	98 in / 50 in / 59 in	785 lb	100-1770

CONCRETE AND MASONRY

CONCRETE + FLOORING

CONCRETE BUCKET

Designed for placement of concrete without resting chute on the ground.

Features include:

- Lightweight design
- Non-jamming, grout-tight, self-closing
- Double clamshell gates

1 CU YD
TUB CAPACITY



MAKE	MODEL	RATED CAPACITY	LEVEL CAPACITY	LOADING HEIGHT	INSIDE DIAMETER	DIMENSIONS (LWH)	WEIGHT	CAT CLASS
Gar-Bro	427-R	1 cu yd	27.5 cu ft	46 in	54 in	60 in / 46 in	400 lb	100-1920

TROWELS

Finish and smooth wet concrete. Ideal for medium to large surface areas.

36-46 IN
RING DIAMETER RANGE



MAKE	MODEL	DRIVE	ENGINE/POWER	RING DIAMETER	HANDLE TYPE	ROTOR SPEED	CAT CLASS
Multiquip	J36H90H	Walk-behind	Gas 8.5 hp	36 in	QuickPitch	90-155 rpm	100-2600
Multiquip	B46H11H	Walk-behind	Gas 10.7 hp	46 in	QuickPitch	90-155 rpm	100-2610

VIBRATORS



*Eco Clean options available

Compact and remove air voids in freshly poured concrete.

UP TO 2.75 IN
HEAD DIAMETER



MAKE	MODEL	TYPE	POWER	SHAFT LENGTH	HEAD DIAMETER	WEIGHT	CAT CLASS
Wacker Neuson	M1500	Handheld pencil	120V 15A	6.5 in	1 in	10.9 lb	100-2120
Wacker Neuson	M2500	Handheld standard	120V 15A	354 in	Up to 2.75 in	12 lb	100-2120
Wacker Neuson	IRFU57	Handheld high frequency	120V 12A	Up to 394 in	2.2 in	44 lb	100-2230
Wacker Neuson	BV50A-H	Backpack	Gas	Up to 198 in	Up to 2 in	29 lb	100-2360

100% COVERED

with Rental Protection Plan (RPP)

The only premier equipment rental company that gives you peace of mind with 100% coverage on damaged or stolen gear.



Theft

If your rental is stolen from your secured job site, file a police report and provide Herc Rentals with a copy.



Damages

When accidental job site damage occurs, RPP will limit the cost of the repair. No need to submit a claim against your insurance.

A Worry-Free Rental Experience!

By accepting our optional RPP on eligible equipment at the start of your rental, Herc Rentals will cover 100% of the equipment repair or replacement cost.*

What's Covered?

Accidental job site damages, and theft or vandalism if equipment was secured.*

What's NOT Covered?

Damage caused by negligence, exposure to corrosive materials, on the road motor vehicle collisions, theft or vandalism of equipment that was not secured.

*Exclusions apply. Review our RPP terms and conditions for all requirements and exceptions.



Scan to review requirements and exceptions in our RPP Terms and Conditions



SCRAPERS



*Eco Clean options available

Ideal for removing floor coverings off wood or concrete floors.

Applications include:

Removing plastic floor coverings, paint, chewing gum, parquet, ceramic, linoleum, ice, rubber-backed and glued-down carpeting, and epoxy.

18.5-2,572 LB

OPERATING WEIGHT



MAKE	MODEL	TYPE	TRAVEL SPEED	VOLTAGE/HP	DIMENSIONS (LWH)	WEIGHT	CAT CLASS
EDCO	ALR-E	Handheld chisel scaler	Manual	Pneumatic 8 cfm @ 90 psi	66 in long	18.5 lb	100-4620
National	550	Manual push	Manual	115V 1HP 14A	33 in / 18 in / 43 in	123 lb	100-4000
Hilti	TE 1000-AVR	Manual push	Manual	120V 1PH 15A	28 in / 6 in / 12 in	26 lb	100-1260
Makinex	JHT-H	Manual cart for Hilti TE1000	Manual	N/A	43 in / 20 in / 43 in	62 lb	100-1320
National	6280HD GLADIATOR	Self-propelled	Up to 30 ft min	115V 1.5 hp 14.7A	50 in / 18 in / 47 in	490 lb	100-4025
National	5700	Ride-on	Up to 120 ft min	(12) 180 amp AGM batteries	54 in / 25 in / 51 in	2,244 lb	100-4030
National	7700	Ride-on	Up to 200 ft min	(12) 200 amp AGM batteries	59 in / 30 in / 51 in	2,572 lb	100-4035
Blast It All	SSA4524V3	Skid steer scraper attachment					290-2105

EDCO CHISEL SCALER BLADES/HOLDER

MAKE	MODEL	DESCRIPTION	ALR-E	CAT-CLASS
EDCO	C10324	Narrow chisel scaler 1.25 in	●	902-5905
EDCO	C10302	Wide chisel scaler 4 in	●	902-5910
EDCO	C10306	4-12 in scraper blade holder	●	902-5920
EDCO	C10329	Scraper blade 4 in	●	-
EDCO	C10304	Scraper blade 8 in	●	-


HILTI TE 1000 BLADES/HOLDER



MAKE	MODEL	TYPE	WIDTH	LENGTH	CAT CLASS
Hilti	2079300	Flex blade holder	6 in	24.9 in	902-1140
Hilti	47893	Flex chisel blades			


NATIONAL SCRAPER HOLDERS

MAKE	MODEL	DESCRIPTION	6280HD	5700 7700	CAT-CLASS
National	7280-6	6 in blade holder	●	-	902-6237
National	7280-12	12 in blade holder	●	-	902-6238
National	7050-6	6 in blade holder	-	●	902-6230
National	7050-12	12 in blade holder	-	●	902-6234
National	7050-27	27 in blade holder	-	●	902-6236



NATIONAL PREMIUM HIGH-TEMPERED BLADES


Best for glued-down carpets, VCT, VAT, rubber tile, cork, and re-scraping adhesive.



MAKE	MODEL	DIMENSIONS LWH	550	6280HD	5700 7700
National	7050-200	3 in / 6 in / .062 in	●	●	●
National	7050-203	3 in / 12 in / .062 in	●	●	●
National	7050-205	3 in / 27 in / .062 in	-	-	●

NATIONAL HEAVY-DUTY BLADES

Best for VCT, VAT, wood, tile, rubber, epoxy, elastomeric coatings, scraping thin-set, and glued ceramic.



MAKE	MODEL	DIMENSIONS LWH	550	6280HD	5700 7700
National	6285	3 in / 6 in / .094 in	●	●	●
National	6284	3 in / 12 in / .094 in	●	●	●
National	6283	3 in / 27 in / .094 in	●	●	●

NATIONAL EXTRA HEAVY-DUTY BLADES


VCT, VAT, wood, tile, light ceramic, re-scraping thin-set and rubber, carpets, cork, elastomeric and urethane coatings.



MAKE	MODEL	DIMENSIONS LWH	550	6280HD	5700 7700
National	6290	3 in / 6 in / .187 in	●	●	●
National	6292	3 in / 12 in / .187 in	●	●	●

NATIONAL ANGLE SHANK WITH CARBIDE TIP


Remove ceramic and thin-set re-scraping. Light-duty commercial-grade ceramic tile and hardwood removal.



MAKE	MODEL	DIMENSIONS LWH	6280HD	5700 7700	CAT-CLASS
National	7281-12	4 in / 2 in / .312 in	●	–	911-6305
National	7281-1	6 in / 1 in / .500 in	●	–	911-6300
National	7079-2	6 in / 2 in / .500 in	–	●	911-6310
National	7079-4	6 in / 4 in / .500 in	–	●	911-6320

NATIONAL SCRAPER RAZOR BLADES/ HOLDERS


For super hard thin epoxies, thin mil coatings (like urethane paint).



MAKE	MODEL	DESCRIPTION	6280HD	5700 7700	CAT-CLASS
National	7280-12RBH	12 in blade holder	●	–	902-6240
National	7050-12RBH	12 in blade holder	–	●	902-6235
National	368-12	.937 / 12 / .045 in blade	●	●	N/A

NATIONAL SELF-SCORING BLADES

Work on attached cushion, unitary or secondary backing, vinyl back, soft to medium PVC, linoleum, carpet tiles, soft cork, enhancer, and unibond hot melts.



MAKE	MODEL	DIMENSIONS LWH	550	6280HD	5700 7700
National	6260-BD	3 in / 6 in / .094 in	–	●	●
National	6249-BU	3 in / 12 in / .094 in	–	●	●

NATIONAL ULTRA HD ANGLE SHANK WITH REMOVABLE CARBIDE TIP


Designed for removing hard goods.



MAKE	MODEL	DESCRIPTION	5700 7700	CAT-CLASS
National	403112	2 in ultra HD shanks, 3 carbide tips, set screws, and tool	●	902-6221
National	402394	3 carbide tips, set screws, and tool	●	N/A

NATIONAL WOOD FLOOR SHANKS

Tough on wood floors either glued or nailed.

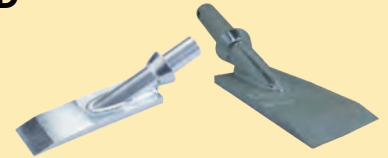

MAKE	MODEL	DIMENSIONS LWH	6280HD	5700 7700	CAT-CLASS
National	7082-8	2.5 in / 8 in / .300 in	●	–	911-6340
National	7075-8	2 in / 8 in / .300 in	–	●	911-6345
National	7077-8	3.5 in / 8 in / .300 in	–	●	911-6350

SCABLERS

Roughen, reduce and level concrete. Prepare surfaces for coatings and finishes.

8-24 IN
WORKING WIDTHS

UP TO 250 SQ FT
PRODUCTION RATE PER HOUR



MAKE	MODEL	VACUUM REQUIRED	TYPE	POWER	PRODUCTION RATE	WORKING WIDTH	WEIGHT	CAT CLASS
UNITEC	153.5200	200 cfm	Handheld	Pneumatic 15.9 cfm @ 90 psi	Up to 100 sq ft hr	8 in	11.5 lb	100-4400
EDCO	CD-5	300 cfm	Walk-behind push	Pneumatic 160 cfm @ 100 psi	Up to 250 sq ft hr	24 in	278 lb	100-4410

EDCO TUNGSTEN CARBIDE SCABBLER BIT

MODEL	TYPE	CD-5
18810	5 point bit for concrete - heavy texture	●



LINOLEUM ROLLER

Essential for all linoleum and vinyl flooring installations. Ensure a flat and level installation while the roller does all the work, helping to evenly distribute and flatten adhesive build-ups.

Features and applications include:

- Segmented rollers which exert even pressure on uneven surfaces
- Removable handle

15 IN
WORKING WIDTH



MAKE	MODEL	TYPE	WORKING WIDTH	WEIGHT	CAT CLASS
Roberts	10-952	Manual walk-behind (Grainger PN: 12L723)	15 in	100 lb	911-6205

GRINDERS



*Eco Clean options available

Floor preparing, grinding, removal and polishing systems ideal for concrete, granite, marble and more.

Features and applications include:

- Vacuum ports eliminate dust
- Capable of conquering small and large projects, including industrial use

5-32 IN
WORKING WIDTHS



MAKE	MODEL	VACUUM REQUIRED	TYPE	POWER	PRODUCTION RATE	WORKING WIDTH	WEIGHT	CAT CLASS
Hilti	DGH 130	150 cfm	Hand held / chamfer	120V 1PH 12A	N/A	5 in	5.6 lb	100-4560
Hilti	DG 150	300 cfm	Hand held	120V 1PH 16A	N/A	6 in	9 lb	100-4570
Husqvarna	HTC 270EG	250 cfm	Edge grinder	240V 1PH 10A	Up to 150 sq ft hr	10.6 in	121 lb	100-4236
Husqvarna	PG 280	250 cfm	Grinder / edge grinder	120V 1PH 15A	Up to 150 sq ft hr	11 in	154.3 lb	100-4230
EDCO	TG-10-11H	200 cfm	Grinder	Gas 11 hp	Up to 500 sq ft hr	10 in	180 lb	100-4250
Husqvarna	PG 400	250 cfm	Grinder	240V 1PH 18A	Up to 500 sq ft hr	16 in	254 lb	100-4239
Husqvarna	PG 400 GAS	250 cfm	Grinder	Gas 10.2hp	Up to 500 sq ft hr	15.75 in	308 lb	100-4255
Husqvarna	PG 450	250 cfm	Grinder / polisher	120V 1PH 15A	Up to 225 sq ft hr	18 in	240 lb	100-4237
EDCO	2GC-NG-11H	200 cfm	Grinder	Gas 11 hp	Up to 500 sq ft hr	22 in	282 lb	100-4260
EDCO	2EC-NG-1.5	200 cfm	Grinder	120/240V 1PH 16/8A	Up to 500 sq ft hr	22 in	258 lb	100-4220
Husqvarna	PG 540	300 cfm	Grinder / polisher	240V 1PH 30A	Up to 440 sq ft hr	20 in	392 lb	100-4275
Husqvarna	PG 690P	400 cfm	Grinder / polisher	Propane 22 hp	Up to 1,300 sq ft hr	26.4 in	766 lb	100-4281
Husqvarna	PG 830S	350 cfm	Grinder / polisher	480V 3PH 22A	Up to 150-1,320 sq ft hr	32 in	1226 lb	100-4282
OZTEC	CG12E-DC7-H	Included	Ceiling grinder 7 ft - 12 ft	120V 1PH 12A+11A	N/A	7 in	N/A	100-4290

GRINDER RELATIVE PRODUCTION RATES (SQ FT/HR)

APPLICATION	PG 280	HTC 270 EG	PG 450	PG 400 ELEC	PG 400 GAS	PG 540	PG 690 P	PG 830S
Thin surface contaminate removal	150	150	225	500	500	110-275	500-1,100	550-1,100
Thick surface contaminate removal	80	80	80	400	400	88-275	325-760	330-880
Smoothen rain damaged concrete	150	150	225	500	500	220-440	760-1,300	80-1,320
Flatten exposed aggregate in concrete	70	70	100	300	300	110-275	375-850	440-880
Expose aggregate in concrete	30	30	70	200	200	66-275	200-760	280-880
Preparation of clean concrete	150	150	225	400	400	165-385	450-1,150	550-1,320
Scratch removal using metal diamonds	100	100	150	300	300	165-330	500-950	660-990
Polishing	N/A	N/A	150	N/A	N/A	275-440	760-1,300	880-1,320

SHOT BLASTERS



A one-step method for stripping, cleaning and profiling floors in preparation for coatings and overlays.

Features and applications include:

- Height-adjustable handle with built-in operator controls
- Front swivel casters increase maneuverability and control

UP TO 2,000 SQ FT
BLASTING CAPACITY PER HOUR
8-10 IN
WORKING WIDTHS



MAKE	MODEL	VACUUM REQUIRED	TYPE	BLASTING WIDTH	BLASTING CAPACITY	POWER	DIMENSIONS (LWH)	WEIGHT	CAT CLASS
National Flooring	A95	200 cfm	Walk-behind	8 in	Up to 430 sf hr	120v 1PH 17A	43.4 in / 11 in / 41 in	121 lb	100-4700
National Flooring	A97	315 cfm	Walk-behind	10 in	Up to 2,000 sf hr	240v 3PH 25A	63 in / 15.25 in / 44 in	430 lb	100-4705

STEEL SHOT

DESCRIPTION	PART NUMBER
S-330 / 50 lb bag	3411

MAGNETIC SHOT SWEEPER

Quickly pickup metal debris like shot and nails.

Features include:

- Quick release handle

24 IN
WORKING WIDTH



MAKE	MODEL	TYPE	WORKING WIDTH	OVERALL WIDTH	APPROXIMATE LB PULL	WEIGHT	CAT CLASS
National Flooring	6552	Manual walk-behind	24 in	30.25 in	400 lb	41 lb	911-6650

SCARIFIERS AND PLANERS



*Eco Clean options available

A one-step method for leveling, removing, and texturing (scarifying) surfaces.

Features include:

- Height-adjustable handle with built-in operator controls
- Vacuum port equipped

UP TO 700 SQ FT
PRODUCTION RATE PER HOUR
8-10 IN
WORKING WIDTHS



MAKE	MODEL	VACUUM REQUIRED	POWER	PRODUCTION RATE	WORKING WIDTH	WEIGHT	CAT CLASS
EDCO	CPL-8-1.5	200 cfm	115/230V 1PH 17.2A	Up to 250 sq ft hr	8 in	145 lb	100-4295
EDCO	CPM8-5	200 cfm	230V 1PH 19.8A	Up to 500 sq ft hr	8 in	220 lb	100-4300
EDCO	CPM8-9H	200 cfm	Gas 9 hp	Up to 500 sq ft hr	8 in	190 lb	100-4310
EDCO	CPM-10-13H	200 cfm	Gas 13 hp	Up to 700 sq ft hr	10 in	267 lb	100-4320

DUST CONTROL VACUUMS

DROP BAG



*Eco Clean options available

These industrial dust collectors comply with or exceed OSHA standards and are suitable to use when grinding, scraping, shot blasting, scarifying, and sawing.

Features include:

- The Longopac® bag system ensures simple, dust-free bag changes.
- Both propane and electric models available

UP TO 400 CFM
AIR FLOW



MAKE	MODEL	LONGOPAC DUST BAG PN	AIR FLOW	POWER	WEIGHT	CAT CLASS
Husqvarna	S26	590429201	250 cfm	120V 1PH 20A 3.2 hp	105 lb	105-1740
Husqvarna	S36 120V	590429201	300 cfm	120V 1PH 20A 3.2 hp	140 lb	105-1746
National	DL4000P	402473	318 cfm	230V 3PH	386 lb	105-1742
Husqvarna	S36 240V	590429201	300 cfm	240V 1PH 15.7A 4.8 hp	140 lb	105-1743
Husqvarna	T8600	590429201	350 cfm	480V 3PH 14A 11.5 hp	454 lb	105-1747
Husqvarna	T8600P	590429201	400 cfm	Propane 18 hp	628 lb	105-1749

DUST CONTROL VACUUMS

CANNISTER

These industrial dust collectors comply with or exceed OSHA standards and are suitable for use when grinding, sawing, coring, and drilling.

UP TO 300 CFM
AIR FLOW



MAKE	MODEL	AIR FLOW	POWER	WEIGHT	CAT CLASS
EDCO	Vortex 200	200 cfm	120V 1PH 16A	99 lb	105-1746
Hilti	VC 300-17 X	300 cfm	120V 1PH 9.2A	26 lb	105-1743

WET/DRY VACUUMS

CANNISTER

Collect and contain dust, debris and water easier and more cost-effectively than ever.

3.7-12.5 GAL
TANK CAPACITY

150 CFM
FLOW



MAKE	MODEL	TANK CAPACITY	RATED FLOW	POWER	CAT CLASS
Nilfisk/Alto	Attix 30 AS/E	8 gal	135 cfm air	120V 1PH 8.3A	105-1630
Karcher	NT 30/1 Tact L	8.2 Gal	150 cfm	120V 1PH 9A	105-1630
Nilfisk/Alto	Attix 50 AS/E	12.5 gal	135 cfm air	120V 1PH 8.3A	105-1650
Hilti	DD-WMS 100	3.7 gal	.5 gpm water	120v 1PH 9A	105-1705

BUFFERS

Powerful floor machines for buffing, scrubbing, polishing, sanding, grinding, and carpet cleaning.

17-20 IN
PAD SIZE

UP TO 7,000 SQ FT
PRODUCTION RATE PER HOUR



MAKE	MODEL	PAD SIZE	PAD SPEED	POWER	PRODUCTION RATE	WEIGHT	CAT CLASS
American Sander	FM1700 HD	17 in	175 rpm	120V 1PH 15A	Up to 6,000 sf hr	102 lb	100-5410
Pioneer Eclipse	225FP 17	17 in	175 rpm	120V 1PH 15A	Up to 6,000 sf hr	91 lb	100-5410
Pioneer Eclipse	225FP 20	20 in	175/320 rpm dual speed	120V 1PH 15A	Up to 7,000 sf hr	95 lb	100-5420

BURNISHERS



*Eco Clean options available

For high-speed burnishing and buffing to bring out the luster in hard surface floors. Available with dust control system.

20-28 IN
PAD SIZE

UP TO 10,000 SQ FT
PRODUCTION RATE PER HOUR



MAKE	MODEL	PAD SIZE	PAD SPEED	POWER	PRODUCTION RATE	WEIGHT	CAT CLASS
Tennant	BR-2000-DC	20 in	2,000 rpm	120V 1PH 15A	Up to 7,000 sf hr	92 lb	100-5430
Pioneer Eclipse	420BU	28 in	1,500 rpm	Propane 18 hp	Up to 10,000 sf hr	234 lb	100-5410

SANDERS

Sand floors to professional results with highly productive, easy-to-use sanders.

Features include:

- Dust collector system
- Easy sandpaper changing system

7⁷/₈-18 IN
WORKING WIDTHS



MAKE	MODEL	TYPE	WORKING WIDTH	PAD SPEED	POWER	WEIGHT	CAT CLASS
American Sander	OBS-18DC	Random orbital sander	18 in	3,600 vpm	120V 1PH 10A	125 lb	100-5300
American Sander	EZ-8	Drum sander	8 in	1,800 rpm	120V 1PH 12A	105 lb	100-5310
American Sander	Super 7R	Edge sander	7-7/8 in	2,800 rpm	120V 1PH 12A	35 lb	100-5320

WE OFFER A WIDE VARIETY OF SAND PAPER TYPES AND GRITS TO MEET YOUR WOOD FLOOR FINISHING NEEDS

FLOOR SWEEPERS



*Eco Clean options available

Battery-powered walk-behinds and propane industrial rider sweepers will help keep your facility free of debris and dust.

Features and applications include:

- Easy to clean and operate
- Collects debris in an easy-to-dump hopper
- Excellent for warehouses, walkways, malls, airports, and schools

UP TO 134K SQ FT
PRODUCTION RATE PER HOUR
25-62 IN
CLEANING WIDTH



MAKE	MODEL	TYPE	CLEANING WIDTH	HOPPER CAPACITY	POWER	PRODUCTION RATE	TRAVEL SPEED	WEIGHT	CAT CLASS
Tennant	S6	Self-propelled	25 in	1.25 cu ft	Battery	Up to 18,750 sq ft hr	1.9 mph	139 lb	105-3580
Tennant	S7	Self-propelled	28 in	1.6 cu ft.	Battery	Up to 28,000 sq ft hr	1.9 mph	267 lb	105-3585
Tennant	S10	Self-propelled walk-behind	34 in	2.8 cu ft	Rechargeable battery	Up to 34,100 sq ft hr	2.9 mph	599 lb	105-3590
Karcher	KM 85/50 R BP	Ride-on	41.3 in	1.8 cu ft	Rechargeable battery	Up to 54,900 sq ft hr	3.7 mph	555 lb	105-3598
Tennant	S16	Self-propelled	46 in	5.3 cu ft	Battery	Up to 111,302 sq ft hr	3.0 mph	1,940 lb	105-3605
Tennant	S16H	Self-propelled	46 in	350 lb	Battery	Up to 111,302 sq ft hr	3.0 mph	1,940 lb	105-3606
Tennant	S20	Ride-on	50 in	11 cu ft	Propane 24.8 hp	Up to 103,840 sq ft hr	6 mph	2,450 lb	105-3600
Tennant	S30	Ride-on	62.5 in	14 cu ft	Propane 50 hp	Up to 133,760 sq ft hr	8 mph	3,570 lb	105-3610

FLOOR SCRUBBERS AND SWEEPER-SCRUBBERS



*Eco Clean options available

Scrubbers are efficient, thorough, and hygienic, triple your scrub time while also reducing the risk of slip-and-fall accidents and chemical usage. Use sweeper-scrubbers to tackle your primary cleaning challenges.

Features include:

- Ergonomically-designed
- Durable and easy to use
- Over three hours of continuous run time
- Floors clean, safe and dry in seconds

UP TO 102K SQ FT
PRODUCTION RATE PER HOUR
15-48 IN
CLEANING WIDTH



MAKE	MODEL	TYPE	CLEANING WIDTH	SOLUTION TANK	RECOVERY TANK	TRAVEL SPEED	PRODUCTION RATE	WEIGHT	POWER	CAT CLASS
Tennant	T1B	Walk-behind scrubber	15 in	2.5 gal	3.4 gal	N/A	Up to 7,750 sq ft hr	110 lb	Battery	105-3702
Tennant	T300	Walk-behind scrubber	20 in	11 gal	14 gal	2.3 mph	Up to 18,906 sq ft hr	400 lb	Battery	105-3710
Tennant	T600E	Walk-behind scrubber	32 in	32 gal	37 gal	3.3 mph	Up to 34,964 sq ft hr	1,036 lb	Battery	105-3715
Tennant	T7	Self-propelled	32 in	29 gal	29 gal	2.9 mph	Up to 56,320 sq ft hr	850 lb	80-160 lb down pressure	105-3715
Tennant	T350	Self-propelled	20 in	14.1 gal	18.4 gal	2.5 mph	Up to 30,000 sq ft hr	725 lb	62 lb and 90 lb down pressure	105-3717
Tennant	T16	Ride-on scrubber	36 in	50 gal	60 gal	5.6 mph	Up to 55,440 sq ft hr	2,800 lb	Battery	105-3720
Tennant	T20	Ride-on scrubber	40 in	80 gal	95 gal	8 mph	Up to 88,000 sq ft hr	4,900 lb	Propane 55 hp	105-3740
Tennant	M20	Ride-on sweeper-scrubber	40 in	56 gal	73 gal	8 mph	Up to 88,000 sq ft hr	3,300 lb	Propane 42.4 hp	105-3760
Tennant	M30	Ride-on sweeper-scrubber	48 in	75 gal	95 gal	8 mph	Up to 102,080 sq ft hr	4,000 lb	Propane 42.4 hp	105-3765



ProControlTM

NextGen



Make any equipment service call a rapid response.

Managers, contractors and crew now have the power to log and manage a service call right from an easy-to-use and intuitive interface from their smart device.



Upload images, video, and audio to document the issue and give our service team a crystal-clear picture of your service needs.



Learn more at [HercRentals.com](https://www.HercRentals.com)

HercRentals[®]



EARTH MOVING



Walk-behind Loaders
Skid Steers
Compact Track Loaders
Compact Excavators
Landscape Tractors
Hydraulic Breakers
Demolition Robots

Excavators
Wheel Loaders
Backhoes
Vacuum Excavators
Dozers
Dust Suppression



Choosing the right equipment for your job,

Rule over the earth and the job site with Herc Rentals earthmoving equipment. Simply consult the chart below to find the equipment you need, then contact your Herc Rentals representative to pinpoint the make and model that's right for your job!

<p>SKID-STEERS</p> <p>IDEAL FOR: • DIGGING • DEMOLITION • HAULING</p>	<table border="1"> <thead> <tr> <th>MODEL:</th> <th>S70</th> <th>S450</th> <th>S570</th> <th>SSV65</th> <th>S650</th> <th>SSV75</th> </tr> </thead> <tbody> <tr> <td>ROC*:</td> <td>700 lb</td> <td>1,300 lb</td> <td>1,950 lb</td> <td>1,950 lb</td> <td>2,690 lb</td> <td>2,690 lb</td> </tr> </tbody> </table>	MODEL:	S70	S450	S570	SSV65	S650	SSV75	ROC*:	700 lb	1,300 lb	1,950 lb	1,950 lb	2,690 lb	2,690 lb						
MODEL:	S70	S450	S570	SSV65	S650	SSV75															
ROC*:	700 lb	1,300 lb	1,950 lb	1,950 lb	2,690 lb	2,690 lb															
<p>COMPACT TRACK LOADERS</p> <p>IDEAL FOR: • DIGGING • DEMOLITION • HAULING</p>	<table border="1"> <thead> <tr> <th>MODEL:</th> <th>T590</th> <th>SVL65</th> <th>SVL95</th> <th>T740</th> </tr> </thead> <tbody> <tr> <td>ROC*:</td> <td>2,100 lb</td> <td>2,100 lb</td> <td>3,200 lb</td> <td>3,200 lb</td> </tr> </tbody> </table>	MODEL:	T590	SVL65	SVL95	T740	ROC*:	2,100 lb	2,100 lb	3,200 lb	3,200 lb										
MODEL:	T590	SVL65	SVL95	T740																	
ROC*:	2,100 lb	2,100 lb	3,200 lb	3,200 lb																	
<p>COMPACT EXCAVATORS</p> <p>IDEAL FOR: • DIGGING • DEMOLITION • GRADING</p>	<table border="1"> <thead> <tr> <th>MODEL:</th> <th>E10</th> <th>K008</th> <th>E26</th> <th>E35i</th> <th>U35</th> <th>U55</th> <th>E50</th> </tr> </thead> <tbody> <tr> <td>WEIGHT:</td> <td>2,593 lb</td> <td>2,200 lb</td> <td>6,489 lb</td> <td>7,468 lb</td> <td>8,478 lb</td> <td>11,860 lb</td> <td>10,677 lb</td> </tr> </tbody> </table>	MODEL:	E10	K008	E26	E35i	U35	U55	E50	WEIGHT:	2,593 lb	2,200 lb	6,489 lb	7,468 lb	8,478 lb	11,860 lb	10,677 lb				
MODEL:	E10	K008	E26	E35i	U35	U55	E50														
WEIGHT:	2,593 lb	2,200 lb	6,489 lb	7,468 lb	8,478 lb	11,860 lb	10,677 lb														
<p>EXCAVATORS</p> <p>IDEAL FOR: • DIGGING • DEMOLITION • GRADING</p>	<table border="1"> <thead> <tr> <th>MODEL:</th> <th>EW60E</th> <th>ECR88D</th> <th>EC140EL</th> <th>EC145EL</th> <th>ECR160EL</th> <th>EC200EL</th> <th>ECR235EL</th> <th>EC300EL</th> <th>EC350EL</th> </tr> </thead> <tbody> <tr> <td>WEIGHT:</td> <td>12,970 lb</td> <td>19,600 lb</td> <td>33,700 lb</td> <td>36,990 lb</td> <td>42,390 lb</td> <td>50,995 lb</td> <td>57,720 lb</td> <td>72,260 lb</td> <td>86,500 lb</td> </tr> </tbody> </table>	MODEL:	EW60E	ECR88D	EC140EL	EC145EL	ECR160EL	EC200EL	ECR235EL	EC300EL	EC350EL	WEIGHT:	12,970 lb	19,600 lb	33,700 lb	36,990 lb	42,390 lb	50,995 lb	57,720 lb	72,260 lb	86,500 lb
MODEL:	EW60E	ECR88D	EC140EL	EC145EL	ECR160EL	EC200EL	ECR235EL	EC300EL	EC350EL												
WEIGHT:	12,970 lb	19,600 lb	33,700 lb	36,990 lb	42,390 lb	50,995 lb	57,720 lb	72,260 lb	86,500 lb												
<p>BACKHOE LOADERS</p> <p>IDEAL FOR: • DIGGING • DEMOLITION • HAULING</p>	<table border="1"> <thead> <tr> <th>MODEL:</th> <th>310LEP ROPS</th> <th>310LEP ROPS EXT</th> <th>410L CAB EXT</th> </tr> </thead> <tbody> <tr> <td>HORSE POWER:</td> <td>69 hp</td> <td>69 hp</td> <td>113 hp</td> </tr> </tbody> </table>	MODEL:	310LEP ROPS	310LEP ROPS EXT	410L CAB EXT	HORSE POWER:	69 hp	69 hp	113 hp												
MODEL:	310LEP ROPS	310LEP ROPS EXT	410L CAB EXT																		
HORSE POWER:	69 hp	69 hp	113 hp																		
<p>DOZERS</p> <p>IDEAL FOR: • FINAL GRADING</p>	<table border="1"> <thead> <tr> <th>MODEL:</th> <th>450K</th> <th>650K</th> </tr> </thead> <tbody> <tr> <td>HORSE POWER:</td> <td>80 hp</td> <td>104 hp</td> </tr> </tbody> </table>	MODEL:	450K	650K	HORSE POWER:	80 hp	104 hp														
MODEL:	450K	650K																			
HORSE POWER:	80 hp	104 hp																			
<p>WHEEL LOADERS</p> <p>IDEAL FOR: • LARGE HAULING</p>	<table border="1"> <thead> <tr> <th>MODEL:</th> <th>L70H</th> <th>L90H</th> <th>L110H</th> </tr> </thead> <tbody> <tr> <td>HORSE POWER:</td> <td>122 hp</td> <td>137 hp</td> <td>190 hp</td> </tr> </tbody> </table>	MODEL:	L70H	L90H	L110H	HORSE POWER:	122 hp	137 hp	190 hp												
MODEL:	L70H	L90H	L110H																		
HORSE POWER:	122 hp	137 hp	190 hp																		

*Rated Operating Capacity

WALK-BEHIND LOADERS



*Eco Clean options available

The narrow track loaders feature best-in-class lifting power of 1,000 pounds while its 81-inch lift arms easily clear the sides of dumpsters and one-ton trucks.

Features and applications include:

- Traction control for easy operation
- Ground speed of up to 4.7 mph
- Narrow track loaders are 33.7-inches wide while augers are 41-inches wide
- Ideal for landscaping and small utility projects

UP TO 1,000 LB
OPERATING CAPACITY



MAKE	MODEL	FUEL	HP	OPERATING CAPACITY	FUEL CAPACITY	DUMP HEIGHT	HYD PRESSURE / FLOW	GROUND PRESSURE	DIMENSIONS (LWH)	WEIGHT	CAT CLASS
TORO	E Dingo 500	Electric	12 hp	600 lb	N/A	47 in	3,250 psi / 6.5 gpm	88.42 psi	82.2 in / 35.6 in / 48.7 in	2,076 lb	200-2015
TORO	TX 427	Gas	25 hp	535 lb	6 gal	46 in	3,000 psi /16.9 gpm	5.0 psi	92 in / 41 in / 46.1 in	1,882 lb	200-1020
TORO	TX525	Diesel	23 hp	553 lb	6 gal	66 in	3,000 psi /15.2 gpm	5.4 psi	92 in / 33.7 in / 46.1 in	1,904 lb	200-1030
TORO	TX1000	Diesel	24.9 hp	1,075 lb	6 gal	81 in	3,000 psi /13.8 gpm	5.0 psi	100.7 in / 41 in / 53.2 in	2,610 lb	200-1040

SKID STEERS

Zero-radius pirouette turning, making them extremely maneuverable and agile. Unlike conventional loaders, skid steer lift arms are alongside the driver.

Features and applications include:

- Two-speed travel
- Dual steering levels
- Large, comfortable cab offers excellent visibility
- Includes sound-dampening features
- Ideal for construction, agriculture, landscaping and grounds maintenance

UP TO 2,690 LB
OPERATING CAPACITY



MAKE	MODEL	OPERATING CAPACITY	ENGINE	DUMP HEIGHT	HYDRAULIC FLOW	DIMENSIONS (LWH)	OPERATING WEIGHT	CAT CLASS
Bobcat	S70	700 lb	23 hp Diesel	94.5 in	Standard 9.8 gpm	75.6 in / 36 in / 71.4 in	2,795 lb	200-1310
Bobcat	S450	1,300 lb	49 hp, Diesel	109.5 in	Standard 16.7 gpm	124.9 in / 62 in / 77.8 in	5,027 lb	200-1350
Bobcat	S570	1,950 lb	61 hp Diesel	119 in	Standard 17.1 gpm	133 in / 68 in / 77.8 in	6,480 lb	200-1350
Bobcat	S570	1,950 lb	61 hp Diesel	119 in	High 26.7 gpm	133 in / 68 in / 77.8 in	6,480 lb	200-1352
Kubota	SSV65PF	1,950 lb	64 hp Diesel	121.5 in	High 28.0 gpm	135.4 in / 69 in / 79.9 in	6,790 lb	200-1352
Bobcat	S650	2,690 lb	74 hp Diesel	124 in	Standard 23 gpm	136 in / 74 in / 81.3 in	8,061 lb	200-1370
Bobcat	S650	2,690 lb	74 hp Diesel	124 in	High 30.5 gpm	136 in / 74 in / 81.3 in	8,061 lb	200-1373
Kubota	SSV75PHFC	2,690 lb	74 hp, Diesel	128.3 in	High 30.4 gpm	144.1 in / 74 in / 81.3 in	8,157 lb	200-1373

COMPACT TRACK LOADERS

Powerful, comfortable and versatile, these loaders deliver ideal rated operating capacity and operate efficiently even in soft, sandy, wet or muddy conditions.

Features and applications include:

- Two-speed travel
- Five-link torsion suspension reduces cab vibration
- Includes sound-dampening features
- Ideal for construction, agriculture, landscaping and maintenance

UP TO 3,200 LB
OPERATING CAPACITY

Bobcat Kubota



MAKE	MODEL	OPERATING CAPACITY	ENGINE	DUMP HEIGHT	HYDRAULIC FLOW	DIMENSIONS (LWH)	OPERATING WEIGHT	CAT CLASS
Bobcat	T450	1,400 lb	61 hp, Diesel	109.5 in	Standard 16.7 gpm	126.6 in / 56 in / 77.8 in	6,148 lb	200-1430
Bobcat	T590	2,100 lb	66 hp, Diesel	119 in	Standard 17 gpm	133 in / 68 in / 77.8 in	7,822 lb	200-1450
Kubota	SVL65-2	2,100 lb	68 hp, Diesel	118.5 in	Standard 17.4 gpm	136 in / 65 in / 80 in	8,035 lb	200-1450
Kubota	SVL75-2	2,300 lb	74 hp, Diesel	119.1 in	Standard 17.4 gpm	140.8 in / 74 in / 82.0 in	9,039 lb	200-1450
Bobcat	T590	2,100 lb	66 hp, Diesel	119 in	High 26.7 gpm	133 in / 68 in / 77.8 in	7,822 lb	200-1452
Kubota	SVL75-2F	2,300 lb	74 hp, Diesel	119.1 in	High 29.3 gpm	140.8 in / 74 in / 82.0 in	9,039 lb	200-1452
Bobcat	T650	2,570 lb	74 hp, Diesel	124 in	Standard 23 gpm	136.8 in / 74 in / 81.3 in	9,113 lb	200-1460
Kubota	SVL95-2S	3,200 lb	96 hp, Diesel	128.5 in	Standard 23.1 gpm	154.6 in / 80 in / 83.3 in	11,299 lb	200-1470
Bobcat	T740	3,200 lb	74 hp, Diesel	132 in	Standard 23 gpm	141.6 in / 80 in / 81.3 in	10,127 lb	200-1471

COMPACT EXCAVATORS

Greater dig depth, specific arm configuration and zero, minimal or conventional tail swing.

Features and applications include:

- Open or closed cabins
- Two-speed travel allows operators to reduce travel time across job sites or between jobs
- Blade float makes grading and leveling simple
- Multiple arm configurations and available extendable arm
- Ideal for construction job sites, road construction, utilities, landscaping and more

UP TO 9,327 LB
LIFT CAPACITY

Bobcat Kubota



MAKE	MODEL	LIFT CAPACITY	HORSE POWER	TAIL SWING	MAX DIG DEPTH	MAX DUMP HEIGHT	DIMENSIONS (LWH)	WEIGHT	CAT CLASS
Kubota	K008	1,040 lb	10.3 hp, Diesel	Conventional	5 ft 8 in	6 ft 8 in	108 in / 28 in / 87 in	2,190 lb	240-1000
Bobcat	E10	527 lb	10.2 hp, Diesel	Zero	6 ft	6 ft	110 in / 28 in / 87 in	2,593 lb	240-1000
Bobcat	E26	1,999 lb	24.8 hp, Diesel	Zero	8.5 ft	9.9 ft	170.4 in / 59.6 in / 94.9 in	5,666 lb	240-1300
Bobcat	E35I	2,866 lb	24.8 hp, Diesel	Zero	10.2 ft	11 ft	189.7 in / 69 in / 95.6 in	7,468 lb	240-1400
Kubota	U35	3,330 lb	24.8 hp, Diesel	Minimal	9 ft 9 in	11 ft 1 in	187 in / 67 in / 97 in	8,488 lb	240-1410
Bobcat	E50	6,034 lb	49.8 hp, Diesel	Conventional	11.6 ft	12.7 ft	218 in / 77.2 in / 99.7 in	10,677 lb	240-1500
Kubota	U55	4,070 lb	45 hp, Diesel	Minimal	11.8 ft	13.2 ft	216 in / 78 in / 100 in	12,335 lb	240-1500
Bobcat	E85	9,327 lb	59.4 hp, Diesel	Minimal	15.5 ft	16.5 ft	246 in / 91 in / 104 in	18,960 lb	240-1710
Volvo	ECR58	7,540 lb	48 hp, Diesel	Reduced	12 ft 10 in	13 ft 8 in	17 ft / 6 ft 7 in / 8 ft 4 in	12,963 lb	240-1500
Kubota	KX080	7,200 lb	62 hp, Diesel	Minimal	15.1 ft	17.2 ft	254 in / 86 in / 100 in	19,225 lb	240-1710

MEDIUM RANGE EXCAVATORS

Dig depths up to nearly 15 feet and max dump heights of more than 17 feet.

Features and applications include:

- Reduced tail swing for access to tight spaces
- Ergonomically designed cab
- Ideal for road construction, utility work, landscaping and various municipal projects

UP TO 8,570 LB
LIFT CAPACITY
VOLVO



MAKE	MODEL	LIFT CAPACITY	HORSE POWER	TAIL SWING	MAX DIG DEPTH	MAX DUMP HEIGHT	DIMENSIONS (LWH)	WEIGHT	MAX SPEED	CAT CLASS
Volvo	EW60E	3,130 lb	63.4 hp, Diesel	Conventional	10 ft 10 in	14 ft 7 in	231 in / 76 in / 112 in	12,970 lb	18.6 mph	240-1620
Volvo	ECR88D	8,570 lb	58 hp, Diesel	Minimal	14 ft 10 in	17 ft 2 in	253 in / 91 in / 107 in	19,600 lb	3.0 mph	240-1710

EXCAVATORS

The spacious cab features an ergonomic interior allowing the operator to remain comfortable while performing complex tasks easily.

Features and applications include:

- Superb operator visibility
- Climate-controlled cab, AM/FM radio
- Joystick controls
- Ideal for trench digging, material handling, forestry work, construction, demolition, landscaping, mining, river dredging, snow removal, driving piles

UP TO 86,500 LB
WEIGHT



MAKE	MODEL	STICK ARM LENGTH	HORSE POWER	MAX DUMP HEIGHT	MAX DIG DEPTH	MAX REACH	TRAVEL SPEED	TAIL SWING	DIMENSIONS (LWH)	WEIGHT	CAT CLASS
Volvo	EC140EL	9 ft 10 in	89 hp	19 ft 6 in	18 ft 3 in	27 ft	3.4 mph	Conventional	25.4 in / 8 ft 6 in / 9 ft 2 in	33,700 lb	240-2000
Volvo	ECR145EL	8 ft 2 in	89 hp	22 ft 7 in	18 ft 2 in	26 ft 11 in	3.4 mph	Reduced	24 ft 4 in / 8 ft 10 in / 9 ft 6 in	36,990 lb	240-2020
Volvo	EC160EL	9 ft 10 in	109 hp	20 ft 8 in	19 ft 11 in	28 ft 11 in	3.5 mph	Conventional	28 ft 9 in / 8 ft 9 in / 9 ft 5 in	42,390 lb	240-2100
Volvo	EC200EL	9 ft 6 in	154 hp	21 ft 8 in	22 ft 3 in	32 ft 9 in	3.5 mph	Conventional	31 ft 9 in / 9 ft 10 in / 9 ft 7 in	50,995 lb	240-2200
Volvo	EC220EL	9 ft 6 in	128 hp	21 ft 10 in	22 ft 1 in	32 ft 1 in	3.5 mph	Conventional	31 ft 10 in / 10 ft 6 in / 9 ft 8 in	51,365 lb	240-2200
Volvo	ECR235EL	9 ft 6 in	128 hp	25 ft 10 in	22 ft 2 in	31 ft 11 in	3.4 mph	Reduced	29 ft 7 in / 10 ft 2 in / 9 ft 9 in	57,720 lb	240-2320
Volvo	EC300EL	10 ft	179 hp	23 ft 1 in	24 ft 1 in	34 ft 6 in	3.4 mph	Conventional	34 ft 6 in / 11 ft 2 in / 10 ft 2 in	72,260 lb	240-2400
Volvo	EC350EL	10 ft 6 in	225 hp	23 ft 5 in	24 ft 11 in	36 ft 2 in	3.3 mph	Conventional	36 ft 10 in / 11 ft 2 in / 10 ft 7 in	86,500 lb	240-2500
Volvo	ECR355E	10 ft	240 hp	25 ft 9 in	22 ft 10 in	34 ft 3 in	2.8 mph	Reduced	32 ft 5 in / 11 ft 9 in / 10 ft 6 in	82,057 lb	240-2510

LANDSCAPE TRACTORS

Provide high torque at low speeds for purposes of plowing, cultivating, tilling or hauling.

UP TO 2,154 LB **Kubota**
LIFT CAPACITY



MAKE	MODEL	TRANSMISSION	ENGINE	DIG DEPTH	OPERATING WEIGHT	LIFT CAPACITY AT PIVOT	DIMENSIONS (LWH)	CAT CLASS
Kubota	B26T1b	HST Transmission 2WD/4WD	24.3 hp, Diesel	8 ft 4 in	4,001 lb	1,301 lb	201.9 in / 53.7 in / 89.1 in	210-1200
Kubota	L4701HST	HST Transmission 2WD/4WD	47.3 hp, Diesel	9 ft 2 in	3,307 lb	2,154 lb	119.5 in / 62.4 in / 91.7 in	275-1160

BACKHOE LOADERS

Dig deep or scoop up dirt, debris and more. Deliver powerful and precise performance on any surface.

Features and applications include:

- High ground clearance
- Outriggers for additional stability
- Roomy cabin for operator comfort, simple controls
- Excellent for agricultural, road, and construction projects and more

UP TO 4,600 LB
BACKHOE LIFT CAPACITY

UP TO 6,967 LB
LOADER LIFT CAPACITY



MAKE	MODEL	HORSE POWER	LIFT CAPACITY	TRAVEL SPEED	MAX DIG DEPTH	REACH	DIMENSIONS (LWH)	WEIGHT	CAT CLASS
John Deere	310LEP ROPS	69 hp	Loader: 6,600 lb Backhoe: 3,400 lb	22.6 mph	14 ft 1 in	17 ft 9 in	23 ft 9 in / 7 ft 3 in / 11 ft 1 in	14,500 lb	210-3200
John Deere	310LEP CAB	69 hp	Loader: 6,600 lb Backhoe: 3,400 lb	22.6 mph	14 ft 1 in	17 ft 9 in	23 ft 9 in / 7 ft 3 in / 11 ft 1 in	15,000 lb	210-3250
John Deere	310LEP ROPS EXT	69 hp	Loader: 6,600 lb Backhoe: 3,004 lb	22.6 mph	Retracted: 14 ft 4 in Ext. Dipper: 17 ft 10 in	Retracted: 18 ft 0 in Extended: 21 ft 4 in	23 ft 9 in / 7 ft 3 in / 11 ft 1 in	14,900 lb	210-3205
John Deere	310LEP CAB EXT	69 hp	Loader: 6,600 lb Backhoe: 3,004 lb	22.6 mph	Retracted: 14 ft 4 in Ext. Dipper: 17 ft 10 in	Retracted: 18 ft 0 in Extended: 21 ft 4 in	23 ft 9 in / 7 ft 3 in / 11 ft 1 in	15,500 lb	210-3255
John Deere	410L CAB EXT	113 hp	Loader: 6,967 lb Backhoe: 4,600 lb	24.9 mph	Retracted: 15 ft 11 in Ext. Dipper 19 ft 7 in	Retracted: 19 ft 9 in Extended: 23 ft 5 in	24 ft 5 in / 7 ft 8 in / 12 ft 10 in	19,800 lb	210-4255

DOZERS

Providing exceptional reliability, power and torque, a low center of gravity, high ground clearance and a cab-forward design that allows for unrivaled operator visibility.

Features and applications include:

- Ergonomic and easy-to-use controls
- Large fuel tanks to allow for increased time on the job site
- Ideal for construction and utility work

80-104 HP
9-10 FT
BLADE WIDTH



MAKE	MODEL	ENGINE	BLADE WIDTH	HORSE POWER	TRAVEL SPEED	DIMENSIONS (LWH)	WEIGHT	CAT CLASS
John Deere	450K	Deere 4.5L	9 ft 7 in	80	5 mph	13 ft 2 in / 9 ft 7 in / 9 ft 2 in	18,550 lb	250-1140
John Deere	650K	Deere 6.8L	10 ft 4 in	104	5 mph	14 ft / 10 ft 4 in / 9 ft 2 in	22,150 lb	250-1340

WHEEL LOADERS

Whether you're moving dirt, rock, landscaping debris or snow.

Features and applications include:

- All-weather cab provides high-visibility, operator comfort and low noise
- Ideal for construction, landscaping, agricultural, forestry, mining and waste management applications

UP TO 35,040 LB
TIPPING CAPACITY
VOLVO








MAKE	MODEL	TRANSMISSION	HORSE POWER	MAX DUMP HEIGHT	TIPPING CAPACITY STRAIGHT/FULL TURN	BREAKOUT FORCE	TRAVEL SPEED	DIMENSIONS (LWH)	WEIGHT	CAT CLASS
Volvo	L70H	Powershift	122 hp	110 ft	21,320 lb / 18,380 lb	19,690 lb	27.5 mph	24 ft 7 in / 8 ft 1 in / 10 ft 9 in	31,400 lb	265-1310
Volvo	L90H	Powershift	137 hp	9 ft 6 in	26,390 lb / 22,590 lb	31,510 lb	27.5 mph	24 ft 9 in / 8 ft 2 in / 10 ft 9 in	34,760 lb	265-1410
Volvo	L110H	Powershift	190 hp	9 ft 4 in	35,040 lb / 30,160 lb	40,900 lb	24.9 mph	26 ft 4 in / 8 ft 9 in / 11 ft 1 in	44,580 lb	265-1510

HYDRAULIC BREAKERS



MAKE	MODEL	FT POUND CLASS	HYDRAULIC FLOW (GPM)	BLOWS PER MINUTE	DIMENSIONS (LWH)	WEIGHT	CAT CLASS
Kent	Fx25a FB-Dingo	275 ft lb	4.75 - 9.25	600 - 1500	47 in / 24 in / 12 in	273 lb	290-1025
Kent	Fx25a FSP	275 ft lb	4.75 - 9.25	600 - 1500	47 in / 24 in / 12 in	273 lb	290-5150
Kent	Fx25a FB-SS	275 ft lb	4.75 - 9.25	600 - 1500	47 in / 24 in / 12 in	273 lb	290-2210
Kent	Fx45a SS	550 ft lb	7.90 - 15.80	600 - 1100	57 in / 46 in / 24 in	840 lb	290-2225
Kent	Fx45a CP	550 ft lb	7.90 - 15.81	600 - 1100	57 in / 46 in / 14 in	435 lb	290-5160
Kent	Fx45a CP-QA	550 ft lb	7.90 - 15.9	600 - 1100	59 in / 46 in / 24 in	790 lb	290-2230
Kent	F9 FSP	1,500 ft lb	17.00 - 30.00	550 - 900	76 in / 18 in / 20 in	1,121 lb	290-6700
Kent	Fx125 Qtv	2,000 ft lb	18.50 - 31.50	400 - 650	92 in / 21 in / 24 in	1,820 lb	290-6705
Kent	Fx275	5,250 ft lb	38 - 58	350 - 550	110 in / 29 in / 20 in	3,758 lb	290-6715
Kent	Fx475	8,500 ft lb	53 - 79	250 - 350	132 in / 33 in / 25 in	7,021 lb	290-6720

HYDRAULIC BREAKER COMPATIBILITY GUIDE

	Equipment Make	Equipment Model	Equipment Cat Class	Breaker Model	Breaker Cat Class
 SKID-STEERS	Bobcat	S70	200-1310 / 200-1311	Fx35a	290-2220
	Bobcat	S450	200-1350 / 200-1351	Fx45a	290-2230
	Bobcat	S570	200-1350 / 200-1351	Fx45a	290-2230
	Kubota	SSV65	200-1350 / 200-1351	Fx45a	290-2230
	Bobcat	S650	200-1370 / 200-1371	Fx45a	290-2230
	Kubota	SSV75	200-1370 / 200-1371	Fx45a	290-2230
 TRACK LOADERS	Bobcat	T450	200-1430 / 200-1431	Fx45a	290-2230
	Bobcat	T590	200-1450 / 200-1451	Fx45a	290-2230
	Kubota	SVL65	200-1450 / 200-1451	Fx45a	290-2230
	Kubota	SVL75	200-1450 / 200-1451	Fx45a	290-2230
	Bobcat	T650	200-1460 / 200-1461	Fx45a	290-2230
	Kubota	SVL95	200-1470 / 200-1471	Fx45a	290-2230
 COMPACT EXCAVATORS	Bobcat	E10	240-1000	Fx25a	290-5150
	Kubota	K008	240-1000	Fx25a	290-5150
	Bobcat	E26	240-1300 / 240-1310	Fx45a	290-5160
	Bobcat	E35	240-1400 / 240-1410	Fx45a	290-5160
	Kubota	U35	240-1400 / 240-1410	Fx45a	290-5160
	Kubota	U55	240-1500 / 240-1510	Fx45a	290-5160
	Bobcat	E50	240-1500 / 240-1510	Fx45a	290-5160
	Kubota	KX080	240-1700 / 240-1710	F9	290-6700
	Volvo	ECR88	240-1710	F9	290-6700
 EXCAVATORS	Volvo	EC140	240-2000 / 240-2020	Fx175	290-6710
	Volvo	ECR145	240-2020 / 240-2030	Fx175	290-6710
	Volvo	EC160	240-2100	Fx175	290-6710
	Volvo	EC200	240-2200 / 240-2210	Fx275	290-6715
	Volvo	ECR235	240-2320	Fx275	290-6715
	Volvo	EC350	240-2500	Fx475	290-6720
 BACKHOES	Deere	310LEP	210-3200 / 210-3250	F9	290-6700
	Deere	310LEP Extendahoe	210-3205 / 210-3255	F9	290-6700
	Deere	410LEP Extendahoe	210-4205 / 210-4255	F9	290-6700
	Deere	710LEP	210-5250	Fx125	290-6705
	Deere	710LEP Extendahoe	210-5255	Fx125	290-6705

EARTH MOVING ATTACHMENTS



AUGERS

Greater torque breaks down rock, tree roots, and frozen ground.



BROOMS

Quick removal jobs without damaging pavement.



SWEEPERS

Scoop, collect, and dump debris with one attachment.



BREAKERS

Site preparation and foundation removal.



TRENCHERS

Side-shift feature allows closer trenching to buildings.



RAKES

Smooth soil and collect debris as small as 1/2 in.



CUTTERS

Cuts brush and mulches small branches up to 3 in. in diameter.



PLANERS

Increase performance and efficiency with a high-flow planer.



FORKS

Quick connect forks from the operator's seat and reduce the need to exit cab.



GRAPPLES

Delivers easy handling of hard-to-manage materials.



SNOW PUSHERS

Free-floating blade contours with ground and collects more snow.

MAKE	MODEL	TYPE	EQUIPMENT	CAT CLASS
McMillen	24861	2 in Hex auger drive	Mini Skidsteer	290-1000
Bobcat	6809442-15C	Auger	Skidsteer-Compact Track Loader-Compact Excavator	290-2000
Bobcat	6905805	68 in Angle broom	Skidsteer-Compact Track Loader	290-2010
Bobcat	6707144	60 in Sweeper pick-up broom	Skidsteer-Compact Track Loader	290-2015
Bobcat	7113767	94 in Snow pusher	Skidsteer-Compact Track Loader	290-2020
Bobcat	7168340	68 in Grapple	Skidsteer-Compact Track Loader	290-2510
Bradco	117765	48 in Trencher	Skidsteer-Compact Track Loader	290-2030
Bobcat	6710630	72 in Power rake	Skidsteer-Compact Track Loader	290-2050
Bradco	30372A-0022	72 in Standard flow rotary cutter	Skidsteer-Compact Track Loader	290-2060
Bobcat	7233002	72 in High flow rotary cutter	Skidsteer-Compact Track Loader	290-2063
Bobcat	M7019	14 in Standard flow planer	Skidsteer-Compact Track Loader	290-2070
Bobcat	M7017	24 in High flow planer	Skidsteer-Compact Track Loader	290-2075
Bobcat	6540182	48 in Forks	Skidsteer-Compact Track Loader	290-2145
FRD	FX45ACP-QA	550 lb Breaker	Skidsteer-Mini Ex-Rubber Tire Backhoe	290-2230
McMillen	122712-x1975	2 in Hex Auger drive	Mini Excavator	290-5000

VACUUM TRAILERS

Designed to handle a broad range of underground construction, excavation and cleanup.

Features and applications include:

- Hydraulically controlled, dual-cylinder tank dumping system provides stability when dumping
- Ideal for pot holing utilities, water valve clean out, underground utility and storm drain clean out, exposing buried utility lines, water leak repair, commercial and residential debris cleanup, posthole digging and more

UP TO 4 GPM
HIGH PRESSURE WATER SYSTEM
500 GAL
VACUUM TANK CAPACITY
Ditch Witch



MAKE	MODEL	ENGINE	VACUUM TANK CAPACITY	VACUUM AIR FLOW	WATER TANK CAPACITY	MAX GPM	MAX PSI	DIMENSIONS (LWH)	DRY WEIGHT	WET WEIGHT	CAT CLASS
Ditch Witch	FX25	31 hp Gas	500 gal	543 cfm	80 gal	4	3,000	200 in / 96 in / 86 in	5,600 lb	9,500 lb	610-2455
Ditch Witch	FX30/HX30	24.8 hp Diesel	500 gal	512 cfm	80 gal	4.2	3,000	232 in / 96 in / 86 in	6,853 lb	12,495 lb	610-2460
Vermeer	CV573SGT	38 hp Gas	500 gal	1000 cfm	200 gal	4	3,000	228 in / 93 in / 89 in	4,850 lb	9,995 lb	610-2455
Vermeer	LP573XDT	24 hp Diesel	500 gal	580 cfm	200 gal	4	3,000	236 in / 93 in / 90 in	6,190 lb	12,000 lb	610-2460

DEMOLITION ROBOTS



When your demolition job involves hazardous working conditions, you may want to send in a robot to get the job done.

Features and applications include:

- Low weight and compact footprint to fit into tight spaces
- Long reach for getting into confined areas
- Outriggers to provide stability
- Ideal for breaking down walls, hard surfaces and more

12-17 FT
REACH
Husqvarna



MAKE	MODEL	POWER TYPE	GENERATOR REQUIRED	SHORE POWER REQUIRED	REACH	WEIGHT	DIMENSIONS (LWH)	CAT CLASS
Husqvarna	DXR 140	Electric 480V 3PH	45 in kW (56 kva), 480V 3PH	480V 3PH 40A	14 ft (Up) 12 ft (Forward)	2132 lb	76 in / 30 in / 48 in (Down) 76 in / 30 in / 55 in (Up)	230-1000
Husqvarna	DXR 300	Electric 480V 3PH	45 in kW (56 kva), 480V 3PH	480V 3PH 40A	17 ft (Up) 16 ft (Forward)	4321 lb	111 in / 31 in / 54 in (Down) 111 in / 31 in / 61 in (Up)	230-1100

DEMOLITION ROBOT ATTACHMENTS



BREAKER



GRAPPLE



CRUSHER



BUCKET

MODEL / TYPE	ATTACH TO	WEIGHT	DIMENSIONS	CAT CLASS
SB 152 / Breaker	DXR 140	326 lb	31 in / 14 in / 12 in	230-1200
SB 202 / Breaker	DXR 300	441 lb	31 in / 16 in / 14 in	230-1210
SB 302 / Breaker	DXR 300	659 lb	31 in / 18 in / 16 in	230-1210
MG 100 / Grapple	DXR 140	220 lb	31 in / 18 in / 22 in	230-1300
MG 200 / Grapple	DXR 300	373 lb	31 in / 18 in / 24 in	230-1310
DCR 140 / Crusher	DXR 140	250 lb	31 in / 28.75 in / 13 in	230-1400
DCR 300 / Crusher	DXR 300	390 lb	31 in / 34.5 in / 13 in	230-1410

MODEL / TYPE	ATTACH TO	WEIGHT	DIMENSIONS	CAT CLASS
DSS 200 / Shear	DXR 140/300	408 lb	31 in / 13 in / 17.1 in	230-1500
DXR 140 / 12 in clean out bucket	DXR 140	110 lb	31 in / 12 in / 20 in	230-1600
DXR 300 / 12 in clean out bucket	DXR 300	110 lb	31 in / 12 in / 20 in	230-1610
DXR 140 / 20 in standard digging bucket	DXR 140	150 lb	31 in / 20 in / 20 in	230-1620
DXR 300 / 20 in standard digging bucket	DXR 300	150 lb	31 in / 20 in / 20 in	230-1630
DXR 140 / 30 in clean out bucket	DXR 140	180 lb	31 in / 30 in / 20 in	230-1640
DXR 300 / 30 in clean out bucket	DXR 300	180 lb	31 in / 30 in / 20 in	230-1650

DUST SUPPRESSION FOG CANNON

Provides real-time view of the inside of concrete structures and generates accurate images automatically for direct on-site evaluation.

50-230 FT
MIST DISTANCE

4-25 GPM
WATER FLOW



MAKE	MODEL	TYPE	THROW	WATER FLOW	POWER	DIMENSIONS (LWH)	WEIGHT	CAT-CLASS
FOGCO	LD 50	Cart mounted dust suppression mister	50 ft	.8-2.5 gpm	240V 1PH 7A	32 in / 22 in / 37 in	127 lb	700-2010
FOGCO	LD 130	Trolley mounted dust suppression mister	130 ft	8 gpm	480V 3PH 21A	71 in / 59 in / 79 in	530 lb	700-2020
FOGCO	HD 230T	Trolley mounted dust suppression mister	230 ft	4-25 gpm	480V 3PH 32A	98 in / 75 in / 88 in	1,125 lb	700-2050

HercRentals[®]

We'll give you the tools...
you provide the talent

Learn more at careers.hercrentals.com





TOOLS

**Electric Tools**

Circular Saws
Miter Saws
Reciprocating Saws
Portable Band Saws
Table Saws
Drills

Mechanical Trades

Drill Presses
Drywall Sanders
Pipe Cleaners
Sewer Viewers
Pipe Locators
Pipe Tools
Cable Pulling
Conduit Benders

Sheaves

Rollers
Flange Spreaders
Hydraulic Torquing Tools
Pneumatic Torquing Tools
Plasma Cutters
Welders
Ladders
Pressure Washers

CIRCULAR SAWS

Designed to rip through large beams like railroad ties, timber and pressure-treated lumber with ease.

Features and applications include:

- Low noise level (87 db)
- Large support handle for increased operator comfort and control
- Top-accessible spindle lock enables easier and faster blade changing
- Blade stabilizer for consistent rotation and superior performance

16¼ IN
BLADE SIZE

Makita



MAKE	MODEL	TYPE	BLADE	45° MITER CUT CAPACITY	90° CROSS-CUT CAPACITY	SPEED	AMP RATING	WEIGHT	CAT CLASS
Makita	5402NA	Circular saw	16-1/4 in	4-3/16 in	6-3/16 in	2,300 rpm	15A	43.5 lb	100-6530

MITER SAWS

Make clean, accurate cuts at all angles with this 12-inch double bevel compound miter saw. Powered by a 15 amp motor that delivers 3,600 rpm.

Features and applications include:

- Adjustment-free cut line indication
- Dust collection captures over 75% of dust
- 2x16 dimensional lumber at 90° and 2x12 at 45°
- Oversized bevel scale makes bevel angle adjustments accurate and easy

12 IN
BLADE SIZE

DEWALT



MAKE	MODEL	TYPE	BLADE	45° MITER CUT CAPACITY	90° CROSS-CUT CAPACITY	SPEED	AMP RATING	WEIGHT	CAT CLASS
Dewalt	DWS780	Sliding compound miter saw	12 in	8 in	14 in	3,800 rpm	15A	56 lb	100-6620

PORTABLE TABLE SAWS

Portable table saw with a steel roll cage delivers powerful rip cutting performance. With a motor reaching up to 3,850 rpm.

Features and applications include:

- Adjustable rear feet designed to level the saw on uneven work surfaces
- Rack and pinion fence stays parallel to the blade for accuracy
- Dust port allows for 2-1/2 inch vacuum hook up and minimizes cleanup
- Maximum cut depth of 2-1/4 inches at 45° and 3-1/8 inches at 90° for a variety of useful cuts

10 IN
BLADE SIZE

DEWALT



MAKE	MODEL	TYPE	BLADE	45° MITER CUT CAPACITY	90° CROSS-CUT CAPACITY	SPEED	AMP RATING	WEIGHT	CAT CLASS
Dewalt	DW745	Compact table saw	10 in	2-1/4 in	3-1/8 in	3,850 rpm	15A	45 lb	100-6650

RECIPROCATING SAWS

When you need to separate walls from adjoining floors, open up doorways in renovation or demolition projects or slice through nails and plumbing pipe, this is the saw for you.

Features and applications include:

- Easily adjusts depth of cut
- Keyless stainless steel blade clamp for quick and easy blade changes and increased reliability
- Variable speed trigger allows user to instantly control speed

1 1/8 IN
BLADE SIZE

DEWALT



MAKE	MODEL	BLADE	SPEED	AMP RATING	WEIGHT	CAT CLASS
Dewalt	DW311K	1-1/8 in	2,700 rpm	13A	9 lb	100-6570

PORTABLE BAND SAWS

Ideal for professionals and occasional users alike. Less noisy and messy than a chop saw, this band saw cuts through quarter-inch steel like it's plywood.

Features and applications include:

- LED sight light allows the user to see cut line in dark jobsite environment
- Variable speed dial allows operator to adjust speed for specific materials and applications
- Ideal for cutting through wood, aluminum, stainless steel, copper, bronze and more

4 7/8 IN
BLADE SIZE

DEWALT



MAKE	MODEL	TYPE	BLADE	MAX CAPACITY (ROUND)	MAX CAPACITY (RECTANGULAR)	SPEED	AMP RATING	WEIGHT	CAT CLASS
Dewalt	DWM120K	Deep cut band saw	4 7/8 in	5 in	5 / 4-3/4 in	100-350 rpm	10A	15 lb	100-6710

STATIONARY CHOP SAWS

This chop saw features Quick-Change™ keyless wheel changes and its Quick-Lock Vise™ lets you secure materials fast while its powerful 15 amp motor easily slices through tough cuts.

Features and applications include:

- 5.5 horsepower motor delivers high performance without overheating
- Versatile 45-degree pivoting fence for accurate angle cuts
- Handle rounds measuring 5 inches across or rectangular materials as large as 4-1/2 X 6-1/2 inches
- Ergonomically designed "D" handle provides more comfortable hand position, reducing fatigue and increasing productivity

14 IN
BLADE SIZE

DEWALT



MAKE	MODEL	TYPE	BLADE	MAX CAPACITY (ROUND)	MAX CAPACITY (RECTANGULAR)	SPEED	AMP RATING	WEIGHT	CAT CLASS
Dewalt	D28715	Chop saw	14 in	5 in	4-1/2 / 6-1/2 in	4,000 rpm	15A	39 lb	100-6640

RIGHT ANGLE DRILLS

Designed for greater operator leverage and control, with triple gear reduction controlling the 300/1,200 rpm motor.

Features and applications include:

- Weighs 16 pounds
- Mechanical-slip clutch in low gear to provide control of reactionary torque
- Adjustable front handle and 2-position side handle provide maximum leverage and control

1/2 IN
CHUCK SIZE
DEWALT



MAKE	MODEL	TYPE	CHUCK SIZE	SPEED RANGE	AMP RATING	WEIGHT	CAT CLASS
Dewalt	DW124k	Right angle drill	1/2 in	300-1,200 rpm	11.5A	14 lb	100-6000

HORIZONTAL DRILLS

Ideal for drilling, concrete and mud mixing.

Features and applications include:

- 120-volt motor delivers up to 550 rpm to increase torque for drilling and mud mixing
- Lightweight and soft grip handle minimizes operator fatigue
- 2-position rear and 3-position side handles for optimal control and comfort

1/2 IN
CHUCK SIZE
DEWALT



MAKE	MODEL	TYPE	CHUCK SIZE	SPEED RANGE	AMP RATING	WEIGHT	CAT CLASS
Dewalt	DW130V	1/2 in drill	1/2 in	0-550 rpm	9A	7.5 lb	100-1550

IMPACT WRENCHES

Delivers a powerful forward and reverse torque.

Features and applications include:

- Compact and light to fit in tight spaces
- Ergonomic grip

1/2-3/4 IN
CHUCK SIZE
DEWALT



MAKE	MODEL	DRIVE	MAX TORQUE	AMP RATING	WEIGHT	CAT CLASS
Dewalt	DW292	1/2 in	345 ft lb	7A	7 lb	130-1670
Dewalt	DW297	3/4 in	434 ft lb	7.5A	11 lb	130-1680

DRYWALL SANDERS

Make drywall sanding a cinch with this 9-pound, long-reach ceiling and wall sander.

Features and applications include:

- Drywall sander with vacuum extension
- Suction hoods with brush ring



MAKE	MODEL	SPEED	POWER	LENGTH	WEIGHT	POWER CABLE	CAT CLASS
Flex	GE5	1,100-1,650 rpm	4.2A	60 in	8.9 lb	39 in	100-5060

DRILL PRESSES

Ideal for drilling and tapping structural steel and most metals, these heavy-duty drills are easy to use and capable of drilling into any ferrous material a half-inch and thicker.

Features and applications include:

- Includes motor and fixed position, variable speed base
- Solid state electronic switching - 9-inch drill travel

3/4-3 IN *Milwaukee*
DRILL CAPACITY



MAKE	MODEL	DRILL CAPACITY	SPEED	POWER	WEIGHT	CAT CLASS
Milwaukee	4210-1	3/4 in	350 rpm	120V 12.5A	62 lb	130-1220
Dewalt	DWE1622K	1 5/8 in - 2 in	450 rpm	110V	47.6 lb	130-1250
CS Unitec	ECO80AK	3 in	4-speed	110V	57 lb	130-1260

PIPE CLEANERS AND SEWER VIEWERS

Find the source of any pipe obstruction — and blast through it.

Features and applications include:

- Rugged frame and reel, drag brake and reel lock
- Operate vertically or horizontally
- 8-inch wheels

1 1/4-10 IN
LINE CAPACITY

General
PIPE CLEANERS



MAKE	MODEL	TYPE	LINE CAPACITY	CABLE/HOSE LENGTH	MOTOR	WEIGHT	CAMERA/MONITOR	CAT CLASS
General	R-SV-D-WC	Pipe cleaner	1-1/4 - 3 in	5/16 in / 25 ft	Drill powered	25 lb	N/A	125-1460
General	MR-C-O	Pipe cleaner	2 - 4 in	1/2 in / 50 ft	1/2 hp	32 lb	N/A	125-1440
General	ER-E	Pipe cleaner	3 - 6 in	5/8 in / 100 ft	1/3 hp	80 lb	N/A	125-1470
General	C-GP-E	Sewer viewer	3 - 10 in	1-5/8 in / 200 ft (Camera width)	Electric 110V	56 lb	7 in Standard (color)	125-1600
General	JM-1450-A	Jetter	1-1/2 in	1/4 in / 150 in or 1/8 in / 30 ft	1-1/2 hp Electric	111 lb	N/A	125-1500
General	JM-2900	Jetter	3 - 8 in	200 ft	13 hp	180 lb	N/A	125-1510

PIPE LOCATORS

Quickly locate inspection cameras, sondes, active power lines and utility lines.

Features and applications include:

- Battery power up to 30 hours
- Ideal for locating almost anything underground with its built-in four-way signal finder.



MAKE	MODEL	TYPE	DISPLAY	CONNECTORS	WEIGHT	CAT CLASS
General	GL-100	Pipe locator	LCD	N/A	5 lb	125-1610
General	GL-175	Line locator transmitter	LCD	Cables and ground clamp included	8 lb	125-1615
Vivax Metrotech	VM-880	Ferrous metal detector	Digital	Mini USB	1.54 lb	100-7050

PIPE THREADERS

Used to cut grooves or threads on the end of a metal pipe, allowing plumbers, contractors and DIYers to fasten the length of a pipe securely to a coupling or connector.

Features and applications include:

- Self-contained oil system with adjustable flow control
- Versatility for threading and grooving

1/2-6 IN
PIPE CAPACITY
RIDGID



MAKE	MODEL	TYPE	PIPE CAPACITY	POWER REQUIREMENTS	WEIGHT	CAT CLASS
Ridgid	535	Threading machine	1/2 in - 2 in	115V 15A	260 lb	125-2300
Ridgid	1224 Pipe	Threading machine	1/2 in - 4 in	120V 15A	509 lb	125-2310
Ridgid	700	Handheld threader	1/2 in - 2 in	115V	25 lb	125-2320
Ridgid	141	Receding geared	2-1/2 in - 4 in	Requires 700, 300 PD or 535 to operate	93 lb	125-2340
Ridgid	161	Receding geared	4 in - 6 in	Requires 700, 300 PD or 535 to operate	158 lb	125-2350
Ridgid	300 Compact	Compact	1/2 in - 2 in	115V 15A	160 lb	125-2360


PIPE BEVELING TOOLS

Our pipe beveling tools are constructed of durable, lightweight, hard-anodized aluminum for easy transportation to any job site.

Features and applications include:

- Requires little or no operator skill or training
- Built to withstand the construction, fabrication and welding job site environment

2-36 IN
PIPE SIZE

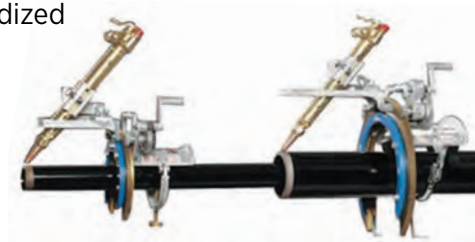

MAKE	MODEL	PIPE OD	CAT CLASS
H&M	NO-0	2 in - 4 in	125-2160
H&M	NO-1	3 in - 8 in	125-2170
H&M	NO-2	6 in - 12 in	125-2180
H&M	NO-3	12 in - 20 in	125-2190
H&M	NO-4	20 in - 26 in	125-2200
H&M	NO-30	30 in - 36 in	125-2220

PIPE STANDS + VISES

Prepare pipes for cutting with clamps that secure different sized pipes for cutting or threading.

Features and applications include:

- Rugged tool tray
- Optimized base for more working area
- Collapsible tripod legs make the stand maneuverable and offer stability when cutting

1/8-24 IN
PIPE CAPACITY
RIDGID



MAKE	MODEL	TYPE	PIPE CAPACITY	LOAD CAPACITY	CAT CLASS
Ridgid	460	Tripod chain vise	1/8 in - 6 in	1,500 lb	912-1520
Sumner	780395	Jack with V-head	24 in	3,500 lb	912-1500

PIPE ACCESSORIES

Used for leveling and marking a center line inside or outside a pipe or tank. Lifting and transporting 2,000 pounds of piping.

Features include:

- Flange Wizard works on 1.5-inch to 10-inch piping or tubing
- Flange Wizard leveling bubble spins 180-degrees
- Can transport 20-inch diameter pipes weighing up to 2,000 lb.



MAKE	MODEL	TYPE	WEIGHT	CAT CLASS
Flange Wizard	53025M	Pipe finder	6 lb	911-5262
Sumner	782699	Cart	165 lb	912-1510

FLANGE SPREADERS

Widens the gap between flanges without damaging flange sealing surfaces.

1-20 TON
CAPACITY



MAKE	MODEL	POWER	CAPACITY	MAX SPREAD	CYLINDER	CAT CLASS
Enerpac	WR-15	Hydraulic	1 Ton	11.5 in	2.2 in	125-2400
Enerpac	FS-56	Ratchet	5 Ton	6.10 in	1.5 in	125-2410
Enerpac	WR-5	Hydraulic	1 Ton	3.7 in	1.00 in	125-2420
Enerpac	FS-109	Hydraulic	10 Ton	3-3/4 in	4.05 in	125-2440
Enerpac	FSH-14	Hydraulic	14 Ton	3-1/16 in	N/A	125-2450
Prytech	PHD0535	Ratchet	20 Ton	5-1/2 in - 8.5 in	N/A	125-2460

CABLE-PULLERS

Ideal for simple, straight shots to pulls with multiple bends and offsets.

2,000 - 25,000 LB
CAPACITY



MAKE	MODEL	TYPE	CAPACITY	POWER	WEIGHT	CAT CLASS
Greenlee	G3	Cable puller	2,000 lb	120V	75 lb	480-4110
Greenlee	G6	Cable puller	6,000 lb	120V	252 lb	480-4130
Greenlee	UT10 Puller	Cable puller	10,000 lb max pulling force	120V	84 lb	480-4150
iToolCo	CK12	Cable puller	12,000 lb	120V	410 lb	480-4153
Greenlee	6810 Cable Feeder	Electric cable feeder	25,000 lb	115V	280 lb	480-4155

BENDERS

Ideal for bending stubs, offsets, saddles, or U-bends in EMT, IMC, PVC coated or rigid conduit.

1/2-5 IN
CAPACITY



MAKE	MODEL	TYPE	CAPACITY	POWER	WEIGHT	CAT CLASS
Greenlee	851 PVC Bender	Electric PVC bender	1/2 in - 4 in PVC all schedules pipe	120V	53 lb	125-1997
Greenlee	555 Classic	Electric conduit bender	1/2 in - 2 in EMT/IMC/Ridgid/40Mil PVC coated conduit	120V	260 lb	125-2000
Greenlee	885CTE980	Hydraulic conduit bender	1 1/4 in - 5 in	120V	999 lb	125-2005
Greenlee	881CTE980	Hydraulic conduit bender	2-1/2 in - 4 in EMT, IMC and Ridgid shoe groups	Electric Hyd pump (120V)	999 lb	125-2010
Greenlee	854 DX	Electric conduit bender	1/2 - 2 in EMT/IMC/Ridgid	120V	550 lb	125-2020

SHEAVES

Designed to be used with specific cable pullers. Save time by pulling and sliding cable into place.

4K-8K LB
CAPACITY



MAKE	MODEL	TYPE	CAPACITY	WEIGHT	CAT CLASS
Greenlee	650	6 in hook	4,000 lb	8.8 lb	911-3325
Greenlee	8012	12 in hook	8,000 lb	28 lb	930-2076
Greenlee	8018	18 in hook	8,000 lb	2,100 lb	930-2076
Greenlee	8024	24 in hook	8,000 lb	16,000 lb	480-1340
Greenlee	639	Twin yoke	4,000 lb	1,000 lb	930-2236
Greenlee	6036	Triple	6,500 lb	28 lb	912-3248
Greenlee	4036	8 wheel	4,000 lb	60 lb	912-3232
Greenlee	4048	10 wheel	4,000 lb	83 lb	912-3234
Greenlee	658	Tray	N/A	11 lb	912-3246

TRAY ROLLERS

Support and guide cables without damaging cable sheaths and incurring overbending stress on power cables.

12-36 IN



MAKE	MODEL	TYPE	WEIGHT	CAT CLASS
Greenlee	2018S	Straight	8 lb	912-3200
Greenlee	2024S	Straight	10 lb	912-3202
Greenlee	2030S	Straight	13 lb	912-3204
Greenlee	2036S	Straight	15 lb	912-3206
Greenlee	2018R	Radius	8 lb	912-3210
Greenlee	2024R	Radius	12 lb	912-3212
Greenlee	2030R	Radius	13 lb	912-3214
Greenlee	2036R	Radius	41 lb	912-3216
Greenlee	20249R	Right angle	41 lb	912-3220
Greenlee	CTR100	4-sided roller guide	9 lb	912-3225
Greenlee	TR9010	90-degree / trapping roller	14 lb	912-3227

HYDRAULIC TORQUING TOOLS

The A Drive Hydraulic Torque Wrench is the hex link that allows the system to fit onto hex nuts in low profile applications.

Features include:

- Consists of the drive pawl, the ratchet and the drive gear
- 10-50 percent faster than other hydraulic wrenches

UP TO 16,800 FT LB
MAX TORQUE
1¼-4⁵/₈ IN
LINK SIZE RANGE



MAKE	MODEL	MAX TORQUE	LINK SIZE	CAT CLASS
Alltite	A2	2,000 ft lb	Powerhead	135-3230
Alltite	A2	2,000 ft lb	Hex link 1-1/4 in	135-3405
Alltite	A2	2,000 ft lb	Hex link 1-5/8 in	135-3410
Alltite	A2	2,000 ft lb	Hex link 1-7/16 in	135-3550
Alltite	A2	2,000 ft lb	Hex link 1-13/16 in	135-3430
Alltite	A4	4,000 ft lb	Powerhead	135-3210
Alltite	A4	4,000 ft lb	Hex link 2 in	135-3435
Alltite	A4	4,000 ft lb	Hex link 2-3/16 in	135-3490
Alltite	A4	4,000 ft lb	Hex link 2-3/8 in	135-3450
Alltite	A4	4,000 ft lb	Hex link 2-9/16 in	135-3750

MAKE	MODEL	MAX TORQUE	LINK SIZE	CAT CLASS
Alltite	A8	8,000 ft lb	Powerhead	135-3130
Alltite	A8	8,000 ft lb	Hex link 2-3/4 in	135-3690
Alltite	A8	8,000 ft lb	Hex link 2-15/16 in	135-3730
Alltite	A8	8,000 ft lb	Hex link 3-1/8 in	135-3470
Alltite	A8	8,000 ft lb	Hex link 3-1/2 in	135-3530
Alltite	A16	16,000 ft lb	Powerhead	135-3140
Alltite	A16	16,800 ft lb	Hex link 3-7/8 in	135-3610
Alltite	A16	16,800 ft lb	Hex link 4-1/4 in	135-3630
Alltite	A16	16,800 ft lb	Hex link 4-5/8 in	135-3650

PNEUMATIC TORQUING TOOLS

These wrenches offer smooth, precise accuracy, rugged durability and safe, ergonomic operation with the user in mind.

Features include:

- Ergonomic pistol grip
- Cast reaction arm provides safe, strong reaction point

¾-1½ IN
DRIVE SIZES



MAKE	MODEL	DRIVE SIZE	TORQUE RANGE	WEIGHT	CAT CLASS
TorcUp	Raptor RP-1000	3/4 in	1,000 ft lb	12 lb	135-2755
TorcUp	Raptor RP-3000	1 in	3,000 ft lb	20 lb	135-2757
TorcUp	Raptor RP-6000	1-1/2 in	6,000 ft lb	36 lb	135-2760

MANUAL TORQUING AND ACCESSORIES



MAKE	MODEL	TYPE	SIZE	DRIVE	CAT CLASS
Alltite	X4-TD1000	Wrench multiplier	2,000 ft lb 1:4 ratio	3/4 in (In) 1 in (Out)	135-3310
Proto	6212	Wrench multiplier	1,200 ft lb 1:6 ratio	1/2 in (In) 3/4 in (Out)	135-3350
Wright	3477	Manual torquing wrench	10-100 ft lb	3/8 in	135-3390
Proto	6020	Manual torquing wrench	120-600 ft lb	3/4 in	135-3290
Wright	8447	Manual torquing wrench	200-1,000 ft lb	1 in	135-3370
Alltite	Revolution	Electric hydraulic pump	67 lb	N/A	130-1760

LADDERS

Sturdy, lightweight and feature a variety of safety mechanisms such as cages, guardrails, outriggers, ground cue indicators, slip-prevention legs and more.

4-40 FT EXTENSION



MAKE	MODEL	TYPE	EXTENSION	DUTY RATING	WEIGHT	CAT CLASS
Little Giant	17824	HyperLite SumoStance fiberglass	24 ft	1A-300 lb	51 lb	930-4068
Little Giant	17828	HyperLite SumoStance fiberglass	28 ft	1A-300 lb	56.5 lb	930-4072
Little Giant	17840	HyperLite SumoStance fiberglass	40 ft	1A-300 lb	70 lb	930-4084
Little Giant	19604	Safety cage fiberglass step	4 ft	1AA-375 lb	53 lb	930-4244
Little Giant	19606	Safety cage fiberglass step	6 ft	1AA-375 lb	67 lb	930-4246
Little Giant	19608	Safety cage fiberglass step	8 ft	1AA-375 lb	84 lb	930-4248
Little Giant	19610	Safety cage fiberglass step	10 ft	1A-300 lb	80 lb	930-4250
Little Giant	18509-817	Adjustable cage fiberglass step	5-9 ft	1AA-375 lb	130 lb	930-4252
Little Giant	18515-817	Adjustable cage fiberglass step	8-14 ft	1AA-375 lb	153 lb	930-4254

HYDROSTATIC TEST PUMPS

Used to fill a tank/chamber/vessel with a liquid dye to find and locate leaks.

Features include:

- Handles up to 10% chlorine solution
- Ability to run dry without damage

500-10,000 PSI



MAKE	MODEL	MAXIMUM PSI	VOLUME	POWER	INLET	OUTLET	DIMENSIONS (LWH)	WEIGHT	CAT CLASS
Rice	EL1A	500 psi	3 gpm	1 hp electric motor, TEFC, 110	3/4 in	1/2 in	22 in / 14 in / 14 in	76 lb	125-1210
Rice	DPH-3B	550 psi	11 gpm	6.5 hp Honda gas	1 in hose barb	1/2 in	25 in / 21 in / 17 in	91 lb	125-1240
Rice	hp10-B	10,000 psi	80 cu in	Compressed air 100 psi	N/A	N/A	26 in / 25 in / 43 in	155 lb	125-1300

PLASMA CUTTERS

Cut through electrically conductive material like steel, stainless steel, aluminum, brass, copper and more with ease.

Features include:





- Easy to use with simple controls, greater portability
- FastConnect torches, CNC interface, and four work lead styles increase versatility for handheld and mechanized use

3/4-2 1/4 IN CAPACITY



MAKE	MODEL	INPUT POWER	DUTY CYCLE	CAPACITY	WEIGHT	CAT CLASS
Hypertherm	Powermax 30 AIR	120-240V 1PH, 29-15A	20% 120V, 35% 240V	3/8 in production, 5/8 in severance	30 lb	550-3015
Hypertherm	Powermax 45	200/240 1PH/ 480 3PH	50% @ 45 A, 200 - 240 V, 1-PH 60% @ 41 A, 200 - 240 V, 1-PH 100% @ 32 A, 200 - 240 V, 1-P	1/2 in - 1 in	37 lb	550-3010
Hypertherm	Powermax 65	200/208/240/480V, 1PH 52/50/44/22A 200/208/240/480/600V, 3PH 32/31/27/13/13A	40% @ 65A 200-208V, 50% @ 65A 230-600V, 100% @ 46A 230-600V	3/4 in production, 1-1/4 in severance	64 lb	550-3030
Hypertherm	Powermax 125	480/600V, 3PH 31/24A	100% @ 125A	1-3/4 in production, 2-1/4 in severance	108 lb	550-3060

WELDING INFORMATION

<p>What welding process is needed?</p>	<p>Stick Welding Uses electricity to melt and join a metal joint with a filler electrode.</p> <p>MIG Welding Joins metals by heating them with arc which is continuously fed with a filler metal electrode.</p> <p>Flux-cored Arc Welding Melts and joins metals by heating them with an arc between a continuously fed electrode.</p>	<p>TIG Welding Joins metals by heating them with a tungsten electrode.</p> <p>Plasma Arc Cutting (PAC) Severs metal by using a constricted arc to melt a small area of work.</p> <p>Air Carbon Arc Cutting (CAC) Melts metals by the heat of an arc using a carbon electrode.</p>
<p>Where will the welder be used?</p>	<p> Indoors Use electric or LPG welders</p>	<p> Outdoors Use electric, diesel, gas or LPG welders</p>
<p>Is shore power available?</p>	<p> YES Electric welders are a great cost effective option.</p>	<p> NO Use diesel, gas, LPG, or electric welders with an ancillary generator.</p>
<p>What voltage and phases are available?</p>	<p>The machine has to match the power at the site: 120V, 280V, 230V, 460V, or 575V. You'll also need to determine whether single-phase or three-phase power is available.</p>	

MODEL	CAT CLASS	STICK	MIG	FLUX-CORED	AC TIG	DC TIG	PAC	CAC-A	METALS	AMP RANGE	GENERATOR POWER
Bobcat 250 Gas	550-1600	●	●●	●	●●	●		3/16 in	Steel, Aluminum, Stainless	40-250 CC 9-275 CV	1-Phase
Bobcat 250 LP	550-1760	●	●●	●	●●	●		3/16 in	Steel, Aluminum, Stainless	40-250 CC 9-275 CV	1-Phase
Trailblazer 325 DSL	550-1850	●	●	●		●	●●	3/16 in	Steel, Stainless	10-325 DC	1-Phase
Big Blue 450 Duo CST	550-1905	●				●		1/4 in	Steel, Stainless	5-280 DC X 2	V3-Phase
Big Blue 400 Pro	550-1870	●	●	●		●	●●	1/4 in	Steel, Stainless	20-400 DC	1-Phase
Millermatic 141	550-1950		●	●●					Steel, Stainless and Aluminum with Spool Gun	30-140 DC	1-Phase
CST-280	550-1280	●				●		3/16 in	Steel, Stainless	5-280 DC	1/3-Phase
XMT-350	550-1300	●	●	●		●	●●	1/4 in	Steel, Stainless & Pulse with Smart Feeder	5-425 DC	1/3-Phase
XMT-450	550-1315	●	●	●		●	●●	1/4 in	Steel, Stainless & Pulse with Smart Feeder	15-600 DC	3-Phase
RANGER 250GXT	550-1600	●	●	●	●●	●		3/16 in	Steel, Aluminum, Stainless	50-250 CC/CV	1-Phase
RANGER 305D	550-1850	●	●	●	●●	●		3/16 in	Steel, Aluminum, Stainless	20-305 CC/CV	1-Phase
VANTAGE 322	550-1870	●	●	●	●●	●		1/4 in	Steel, Aluminum, Stainless	20-400 CC/CV	1-Phase and 3-Phase
VANTAGE 549X	550-1880	●	●	●	●●	●		3/8 in	Steel, Aluminum, Stainless	20-575 CC/CV	1-Phase and 3-Phase
INVERTEC V276	550-1280	●		●		●		3/16 in	Steel, Aluminum, Stainless	20-275 CC	
FLEXTEC 500X	550-1310	●	●	●		●		5/16 in	Steel, Aluminum, Stainless	5-500 CC/CV	
FLEXTEC 650X	550-1330	●	●	●		●		3/8 in	Steel, Aluminum, Stainless	10-815 CC/CV	

- Designed for this process
- Capable of this process

Constant Current (CC): Commonly used for stick and TIG welding

Constant Voltage (CV): Commonly used for MIG welding

Duty Cycle: The number of minutes out of a 10 minute time period a welding machine can be operated at max output.

ELECTRIC WELDERS



Designed for indoor welding.

Features include:

- Compatible with wireless remote controls
- Stationary and towable welders available

280-650 AMP
RATED OUTPUT



MAKE	MODEL	POWER REQUIREMENTS	PROCESSES	RATED OUTPUT @ DUTY CYCLE %	WEIGHT	CAT CLASS
Miller	CST-280	220/230/240/460V	STICK, DC TIG	250A / 31.2 VDC @ 35%	41 lb	550-1280
Lincoln	INVERTEC V276	208-575V 1-3PH 50-60Hz	STICK, DC TIG	275A / 31 VDC @ 35%	54.4 lb	550-1280
Lincoln	FLEXTEC 500X	380-575V 3PH 50-60Hz	STICK, FLUX CORE, DC TIG, MIG	500A / 40 VDC @ 60%	136 lb	550-1310
Lincoln	FLEXTEC 650X	380-575V 3PH 50-60Hz	STICK, FLUX CORE, DC TIG, MIG	750A / 44 VDC @ 60%	165 lb	550-1330
Miller	XMT-350 FIELD PRO	208-575V 1PH OR 3PH	STICK, TIG, MIG, FLUX CORED, ARC GOUGING	350A / 34 VDC @ 60%	100 lb	550-1300
Miller	MILLERMATIC 141	120V/20A	MIG, FLUX CORED	40A / 16 VDC @ 40%	51 lb	550-1950

ENGINE DRIVEN WELDERS

Designed for Stick/TIG welding pipe and plate in the construction industry.

Features include:

- Compatible with wireless remote controls
- Stationary and towable welders available

180-500 AMP
RATED OUTPUT



MAKE	MODEL	POWER REQUIREMENTS	PROCESSES	RATED OUTPUT @ DUTY CYCLE %	GENERATOR OUTPUT (PEAK)	WEIGHT	CAT CLASS
Multiquip	GAW180HEA	Gas	STICK, FLUX CORED	180A / 27 VDC @ 50%	3,000W	246 lb	550-1540
Miller	Bobcat 250	Gas	STICK, FLUX CORED, DC TIG, MIG	225A / 25 VDC @ 100%	11,000W	601 lb	550-1600
Lincoln	Ranger 250GXT	Gas	STICK, FLUX CORE, DC TIG, MIG	250A / 25 VDC @ 100%	11,000W	602 lb	550-1600
Lincoln	Ranger 305LPG	LP	STICK, FLUX CORE, DC TIG, MIG	300A / 25 VDC @ 100%	10,000W	408 lb	550-1760
Miller	Bobcat 250	Diesel	STICK, FLUX CORED, DC TIG, MIG	225A / 25 VDC @ 100%	11,000W	635 lb	550-1760
Miller	Trailblazer 325D	Diesel	STICK, FLUX CORED, DC TIG, MIG, CAC-A	320A / 33 VDC @ 100%	12,000W	801 lb	550-1850
Lincoln	Ranger 305D	Diesel	STICK, FLUX CORE, DC TIG, MIG	300A / 29 VDC @ 100%	11,000W	698 lb	550-1850
Miller	Big Blue 400 Pro	Diesel	STICK, FLUX CORED, DC TIG, MIG, CAC-A	400A / 24 VDC @ 100%	12,000W	1,130 lb	550-1870
Lincoln	Vantage 322	Diesel	STICK, FLUX CORE, DC TIG, MIG	300A / 32 VDC @ 100%	11,500W (1PH); 12,500W (3PH)	1,035 lb	550-1870
Lincoln	Vantage 549X	Diesel	STICK, FLUX CORE, DC TIG, MIG	525A / 41 VDC @ 100%	11,000W (1PH); 19,000W (3PH)	1,662 lb	550-1880

FUME EXTRACTORS



Captures fumes and small weld particles when welding.

Features include:

- Includes 8 foot hose
- Flexible funnel magnetic nozzle

UP TO 132 CFM



MAKE	MODEL	INPUT POWER	PROCESSES	RATED OUTPUT	DIMENSIONS (LWH)	WEIGHT	CAT CLASS
Miller	Filtair 130	120B	Fume extractor	132 cfm	12 in / 12 in / 23 in	46 lb	550-1400
Lincoln	X-TRACTOR MINI (previously known as MINIFLEX)	120V 1PH 60Hz	Fume extractor	95 cfm-Low; 108 cfm-High	16.8 in / 15.6 in / 29 in	40 lb	550-1400

MULTIPLE OPERATOR RACKS

CST RACKS

4-8
PACK
RACKS



XMT RACKS

4-6
PACK
RACKS



WELDING SOLUTIONS



WELDER: CST-280 **RACK:** 4-PACK **POWER:** DCA70SSIU4F



WELDER: XMT-350 **RACK:** 4-PACK **POWER:** DCA70SSIU4F

WELDER MODEL	CST-280 4-Pack Rack		
INPUT POWER TO RACK	220-230/460-575 VAC, 50/60 Hz, 3PH		
KVA	58.4		
KW	40.8		
CAT CLASS	912-4654		
GENERATOR MODEL	DCA70SSIU4F		
KW PRIME (STANDBY)	56 (62)		
DRY WEIGHT	4,420 lb	WET WEIGHT	5,300 lb
TOTAL FUEL CAPACITY	103 gal		
FUEL CONSUMPTION	4.40 pgh Full Load		
RUN TIME	23 hrs		
CAT-CLASS	501-1055		

WELDER MODEL	XMT-350 4 Pack Rack		
INPUT POWER TO RACK	208-575 VAC, 50/60 Hz, 1 or 3PH		
KVA	56.8		
KW	54.4		
CAT CLASS	912-4650		
GENERATOR MODEL	DCA70SSIU4F		
KW PRIME (STANDBY)	56 (62)		
DRY WEIGHT	4,420 lb	WET WEIGHT	5,300 lb
TOTAL FUEL CAPACITY	103 gal		
FUEL CONSUMPTION	4.40 pgh Full Load		
RUN TIME	23 hrs		
CAT-CLASS	501-1055		



WELDER: CST-280 **RACK:** 8-PACK **POWER:** DCA125SSIU4F



WELDER: XMT-350 **RACK:** 6-PACK **POWER:** DCA125SSIU4F


WELDER MODEL	CST-280 8-Pack Rack		
INPUT POWER TO RACK	220-230/460-575 VAC, 50/60 Hz, 3PH		
KVA	116.8		
KW	81.6		
CAT CLASS	912-4658		
GENERATOR MODEL	DCA125SSIU4F		
KW PRIME (STANDBY)	100 (110)		
DRY WEIGHT	6,065 lb	WET WEIGHT	7,475 lb
TOTAL FUEL CAPACITY	169 gal		
FUEL CONSUMPTION	7.11 gph Full Load		
RUN TIME	23 hrs		
CAT-CLASS	501-1105		

WELDER MODEL	XMT-350 6 Pack Rack		
INPUT POWER TO RACK	460/480/575, 3PH		
KVA	85.5		
KW	81.6		
CAT CLASS	912-4652		
GENERATOR MODEL	DCA125SSIU4F		
KW PRIME (STANDBY)	100 (110)		
DRY WEIGHT	6,065 lb	WET WEIGHT	7,475 lb
TOTAL FUEL CAPACITY	169 gal		
FUEL CONSUMPTION	7.11 gph Full Load		
RUN TIME	23 hrs		
CAT-CLASS	501-1105		


ELECTRIC VS DIESEL WELDING COST SAVINGS



One 350 amp multi-operator 6-Pack Rack




Six 325 amp trailer mounted diesel welders



108 Truckload: 108 welders
On a standard 53 ft flatbed

CAPACITY



15 Truckload: 15 welders
On a standard 53 ft flatbed

ZERO emissions | **ZERO** GPH

EMISSIONS

T4F emissions | **4.5** GPH
6 welders at .75 gph



Shore Power
Direct power for continuous operation

POWER



Diesel Power
Requires daily refueling

18 total sq ft

FOOT PRINT

240 total sq ft



	ONE 6-PACK OF 350 AMP INVERTERS POWERED BY SHORE POWER	ONE 6-PACK OF 350 AMP INVERTERS POWERED BY 100KW PORTABLE GENERATOR	SIX DIESEL TRAILBLAZER 325D WELDERS
AMPERAGE OUTPUT POTENTIAL	2,100 Amps	2,100 Amps	1,950 Amps
MAX RUN TIME	Unlimited	30 Hours	12 Hours per welder
FUEL CONSUMPTION PER HOUR *	0 Gal	5 Gal	4.5 Gal (.75 gph per welder / 6 welders)
DIESEL PRICE PER GALLON AVG.	\$5.27	\$5.27	\$5.27
FUEL COST PER HOUR	\$0	\$26.35	\$23.72
WORK HOURS PER MONTH **	200	200	200
FUEL COST PER MONTH	\$0	\$5,270	\$4,744
LABOR COST TO REFUEL PER MONTH	\$0	\$53 ***	\$900 ****
TOTAL FUELING COST PER MONTH	\$0	\$5,323	\$5,644

* Fuel consumption will vary based on welding amperage. Example shown is based on 200 amps @ 100% Duty Cycle

** 10 hour shifts per day / 20 workdays per month

*** 15 minutes to fuel one generator (1) time every 3 days

**** 1.5 Hours per day to refuel (6) welders at \$30 per hour / 20 workdays per month

COLD WATER PRESSURE WASHERS



*Eco Clean options available

From light, home DIY use to heavy-duty pressure washing.

Features and applications include:

- Multiple and easy connect nozzles
- Ideal for washing construction, farm and industrial equipment; other uses include washing stone walls, sidewalks, gutters, doors, concrete floors, fences and more

1K-5K PSI

MAX PSI



MAKE	MODEL	MOTOR TYPE / CAPACITY	MAX PSI	MAX GPM	DIMENSIONS (LWH)	WEIGHT	CAT CLASS
Mi-T-M	CD-1002-3MUH	Electric / 120V 12.5A	1,000 psi	2.0 gpm	20 in / 11.5 in / 14 in	58 lb	105-2010
Mi-T-M	CW-2505-4MGH	Gas 389cc Honda OHV / 1.6 gal	2,500 psi	4.4 gpm	45.5 in / 28 in / 26 in	216 lb	105-2020
Mi-T-M	CBA-4004-1MGH	Gas 389cc Honda OHV / 1.6 gal	4,000 psi	4.0 gpm	47 in / 27.5 in / 28.5 in	165 lb	105-2050
Mi-T-M	CWC-5004-4MGH	Gas 680cc Honda OHV / 13.0 gal	5,000 psi	4.0 gpm	43 in / 27.75 in / 36 in	398 lb	105-2070

COLD WATER PRESSURE WASHER W/ ROTARY SURFACE CLEANER

All-in-one unit for pressure washing and surface cleaning

Features and applications include:

- Multiple and easy connect nozzles
- Complete solution for quick, streak-free cleaning business entrances, parking lots, driveways, pool decks, and sidewalks

4,000 PSI

MAX PSI



MAKE	MODEL	MOTOR TYPE / CAPACITY	MAX PSI	MAX GPM	DIMENSIONS (LWH)	WEIGHT	CAT CLASS
Karcher	Jarvis SCW 4.0/40 G	Gas 420cc Karcher OHV / 1.7 gal	4,000 psi	4.0 gpm	52.5 in / 34.5 in / 35.1 in	212 lb	105-2065

HOT WATER PRESSURE WASHERS



*Eco Clean options available

Gasoline or electric-powered hot water pressure washers with oil-fired burners.

Features and applications include:

- Highly portable, thanks to four pneumatic tires
- Belt-driven tri-plex pump
- High-pressure detergent application
- Ideal for industrial use, food service industry and anywhere unwanted oil and grease accumulates

3.6-4 HRS

RUN TIME



MAKE	MODEL	MOTOR TYPE / CAPACITY	MAX PSI	MAX GPM	DIMENSIONS (LWH)	WEIGHT	CAT CLASS
Alkota	212AX4X (HERC212E)	Electric 2 hp / 115V	1,200 psi	2.0 gpm	40 in / 27 in / 40 in	420 lb	105-2505
Alkota	3305X4X (HERC330G)	9 hp Honda gas w diesel burner / 8 gal	3,500 psi	3.0 gpm	53 in / 31.5 in / 50 in	650 lb	105-2515
Mi-T-M	HSP-3003-3MGH	9 hp Honda gas w diesel burner / 5.5 gal	3,000 psi	2.9 gpm	43 in / 30 in / 41 in	407 lb	105-2515

TOW BEHIND HOT PRESSURE WASHERS

Features include:

- Electric start
- 200-degree max outlet temperature
- Professional-grade insulated trigger gun with safety lock-off
- External bypass system allows more water into the system to protect from heat build-up

3.7-5 GPM
4,000 PSI
MAX PSI



MAKE	MODEL	MOTOR	WATER TANK CAPACITY	MAX PSI	MAX GPM	DIMENSIONS (LWH)	GVW	CAT CLASS
Mi-T-M	HMT-4004-OMGV	Gas 14 hp Vanguard w/ diesel burner	N/A	4,000 psi	3.7 gpm	99 in / 43.5 in / 36 in	1,000 lb	105-2805
Mi-T-M	HS-3505-IMGH	Gas 20.3 hp Honda GX630 OHV w/ diesel burner	200 gal	3,500 psi	4.7 gpm	101 in / 60 in / 66.5 in	7,500 lb	105-2810
Alkota	5357K	Diesel 20.3 hp Kubota w/ diesel burner	330 gal	3,500 psi	5.0 gpm	168 in / 72 in / 54 in	7,500 lb	105-2800

PRESSURE WASHER ACCESSORIES

Capable of cleaning any flat surface area. Can be used with hot water.

Features and applications include:

- 20-28 in diameter allows for cleaning of larger surfaces
- Compatible with any pressure washer up to 4,000 PSI
- Quickly clean decks, driveways, sidewalks and parking lots

2.5-10 GPM
WATER VOLUME



MAKE	MODEL	TYPE	WIDTH	PSI	WATER VOLUME	CAT CLASS
Mi-T-M	AW-7020-8003	Rotary surface cleaner	20 in	Up to 4,000 psi	3 to 5 gpm	902-6533
Mi-T-M	AW-7020-8001	Rotary surface cleaner with wheels	28 in	Up to 4,000 psi	4 to 10 gpm	902-6536
Mi-T-M	AW-7018-1200	Telescoping wand to 12 ft	N/A	Up to 4,000 psi	2.5 TO 5 gpm	902-6508

HercRentals®

Industrial Project and Tool Management

In this fully customizable solution, customers are provided with a trailer packed with the tools they need.





LAWN AND LANDSCAPE



Stump Grinders
Trenchers
Mowers
Augers
Tillers

Chainsaws
Leaf Blowers
Dethatchers
Sod Cutters
Aerators

Log Splitters
Wood Chippers

STUMP GRINDERS

Features include:

- Hi-drive track system provides superior climbing capability, maneuverability, and greater hillside stability
- All-hydraulic sweep control valve facilitates side-to-side feathering for superior stump grinding

**9.5-19 IN
CUTTING WHEEL**



MAKE	MODEL	CUTTING WHEEL	BELOW GROUND CUTTING CAPACITY	ABOVE GROUND CUTTING CAPACITY	POWER	DIMENSION (LWH)	WEIGHT	CAT CLASS
Toro	SRG-13	9.5 in	11 in	14 in	14 hp Gas	6 in / 29.5 in / 42 in	240 lb	115-3600
Toro	STX-26	19 in	12.5 in	35 in	26 hp Gas	78 in / 34 in / 46 in	1,200 lb	115-3610
Vermeer	SC30TX	16 in	12 in	25 in	25 hp Gas	94 in / 35 in / 49 in	1,550 lb	115-3610

TRENCHERS

Features include:

- Easy-to-use control system
- Zero-turn capability
- Tracks disperse weight, providing high flotation in loose sand or mud

**18-36 IN
CUTTING DEPTH**



MAKE	MODEL	TYPE	SIZE	POWER	DIMENSION (LWH)	WEIGHT	CAT CLASS
Ditch Witch	C16X	Walk-behind trencher	24 in	16 hp Gas	94 in / 35.8 in / 63 in	1,895 lb	280-1020
Toro	TRX-20	Walk-behind trencher	36 in	20 hp Gas	82.5 in / 33.8 in / 46 in	1,133 lb	280-1040
Ground Hog	T-4	Operator propelled trencher	18 in	5.5 hp Gas	60 in / 24 in / 41 in	230 lb	280-1060

MOWERS

Mow tall grass, chop through thick brush and maintain landscapes.



MAKE	MODEL	TYPE	SIZE	POWER	DIMENSION (LWH)	WEIGHT	CAT CLASS
Honda	HRC2163HXA	Mower (rear bag)	21 in	5.5 hp Gas	64.4 in / 23 in / 40 in	127 lb	115-2200
Billy Goat	BC2600HH	Brushcutter	26 in	13 hp Gas	83 in / 31 in	335 lb	115-2230

AUGERS

Designed to drill and loosen tough soil.

Features include:

- Variable speed, forward and reverse auger rotation
- Drilling head pivots from side to side for drilling on uneven terrain

**2-18 IN
AUGER WIDTH**



MAKE	MODEL	TYPE	SIZE	POWER	DIMENSION (LWH)	WEIGHT	CAT CLASS
Ground Hog	HD99	Towable single operator auger	18 in	9 hp Gas	100 in / 34 in / 38 in	295 lb	115-2500
Stihl	BT131	Single operator auger	10 in	1.9 hp Gas	N/A	22 lb	115-2490
Ground Hog	C-71-5H	Dual operator auger	12 in	5.5 hp Gas	40.5 in / 30 in / 20.5 in	72 lb	115-2540

TILLERS

Ideal for breaking up hardened surface dirt and preparing soil for planting.

Features include:

- Mid and heavy-duty tillers available
- Counter-rotating lines cut through sod/hard soil
- Simple and easy-to-use

20-26 IN
TILLING WIDTH

HONDA



MAKE	MODEL	TYPE	SIZE	POWER	DIMENSION (LWH)	WEIGHT	CAT CLASS
Honda	FC600	Mid-tine Rototiller	26 in	5.5 hp Gasoline	55.9 in / 26.4 in / 42.3 in	128 lb	115-1550
Barreto	E1320H	Rear-tine Tiller	20 in	13 hp Gasoline	77 in / 27 in / 44 in	560 lb	115-1590

CHAINSAWS

Features include:

- Powerful, versatile, fuel-efficient and technologically advanced

7-25 IN
LENGTH

STIHL



MAKE	MODEL	TYPE	SIZE	POWER	WEIGHT	CAT CLASS
Stihl	MSE210CBQ	Chainsaw	16 in	1.8 kW Electric	9.4 lb	115-2700
Stihl	HT131	Pole pruner	7 ft 6 in - 11 ft 6 in	36.3 cc Gas	17.3 lb	115-2755
Stihl	MS362C-M	Chainsaw	25 in	59 cc Gas	12.3 lb	115-2790
Stihl	MS461	Chainsaw	32 in	76.5 cc Gas	14.6 lb	115-2810

LEAF BLOWERS AND VACUUMS

Clean up from lawn maintenance and lot debris including grass, mulch, cans bottles and more.

Features include:

- Powerful, versatile, fuel-efficient and technologically advanced

STIHL



MAKE	MODEL	TYPE	SIZE	POWER	DIMENSION (LWH)	WEIGHT	CAT CLASS
Stihl	BR600	Backpack blower	N/A	64.8 CC Gas	19.8 in / 14.9 in / 20.8 in	21.6 lb	115-2420
Billy Goat	F1302H	Walk-behind blower	N/A	13 hp Gas	58 in / 28.5 in / 45 in	160 lb	115-2430
Billy Goat	TKV650SPH	Lawn and litter vacuum	27 in	5.5 hp Gas	62 in / 26.75 in	141 lb	105-3800

DETHATCHER

For heavy-duty turf renovation and remove thick thatch buildup.

Features include:

- Powerful, versatile, fuel-efficient and technologically advanced

RYAN
The #1 in Turf Equipment



MAKE	MODEL	SIZE	POWER	DIMENSION (LWH)	WEIGHT	CAT CLASS
Ryan	554871	18 in	4.8 hp Gas	55.5 in / 27 in / 39 in	131 lb	115-1770
Billy Goat	PR550H	20 in	5.5 hp Gas	45.5 in / 26.5 in / 39 in	158 lb	115-1770

SOD CUTTERS

Ideal for landscapers, irrigation work, golf courses or for maintaining sports turf.

Features include:

- Self-propelled technology and maximum traction wheels
- Laser clad cutting blade for precision cut and up to 3x blade life

18 IN
CUTTING WIDTH



MAKE	MODEL	SIZE	POWER	DIMENSION (LWH)	WEIGHT	CAT CLASS
Ryan	544952J	18 in	6.5 hp Gas	53 in / 25 in / 40 in	373 lb	115-1710
Billy Goat	SC181H	18 in	5.5 hp Gas	59 in / 26.5 in / 36.5 in	348 lb	115-1710

AERATORS

Designed to give lawns fresh air and the water and nutrients its roots need to flourish.

Features include:

- Fold-n-Go™ handles make transport easy
- Self-propelled with easy-steer technology

19-26 IN
WIDTH



MAKE	MODEL	SIZE	POWER	DIMENSION (LWH)	WEIGHT	CAT CLASS
Ryan	554913C	26.5 in	3.5 hp Gas	54 in / 36 in / 49 in	250 lb	115-1810
Billy Goat	AE401H	19 in	4 hp Gas	57 in / 29 in / 52.5 in	242 lb	115-1810

LOG SPLITTERS

Features include:

- Torsion axle suspension reduces bounce, improves tracking and towability when transporting
- Auto latch system for safe towing

UP TO 25 IN
LOG DIAMETER



MAKE	MODEL	FORCE	SIZE	POWER	DIMENSION (LWH)	WEIGHT	CAT CLASS
Iron & Oak	BHVH3018GXT	30 Ton	25 in	8.4 hp Gas	94 in / 54 in / 46 in	730 lb	115-2900

WOOD CHIPPERS

Features include:

- Centrifugal clutch engagement prevents belt slip
- Large infeed opening makes it easier for operator to insert odd-shaped material inside the chipper, decreasing the number of saw cuts needed prior to feeding the chipper

6-12 IN
CAPACITY



MAKE	MODEL	SIZE	POWER	DIMENSION (LWH)	WEIGHT	CAT CLASS
Barreto	E3107C-H	7 in	24 hp Gas	120 in / 70 in / 88 in	1,890 lb	115-3510
Bandit	12XPC	12 in	74 hp Diesel	194 in / 80 in / 98 in	4,900 lb	115-3540

LIGHTING



Small Portable
Hazardous Location
Metal Halide Tow Behinds
Engine Driven LED Towers
Electric LED Light Towers
Solar LED Towers



SMALL PORTABLE LIGHTING



Illuminate large indoor or outdoor areas or provide spot lighting in confined spaces. LED lights are energy efficient and able to withstand tip overs and drops without bulb breakage.

Features include:

- Floor stand, tripod mount or wheeled cart mounted
- Ability to “daisy chain” allows multiple lights to be powered by one 15 amp circuit
- Avoids burns and premature breakage as no heat is produced by the bulbs



MAKE	MODEL	TYPE	RANGE	LIGHT TYPE	LUMENS	POWER	LIGHTS	CAT CLASS
LIND	Beacon970	Flood	50 ft	Flood LED	5,000	110V	50W LED	110-1550
LIND	Beacon360 GO	360 degree	25 ft	Area LED	6,000	Rechargeable battery	45W LED	110-1577
Probuilt	WobbleLight V3	Floor	35 ft	Self-righting LED	8,600	120V	80W LED	110-1570
LIND	Beacon360 BLAZE	360 degree	50 ft	Area LED	14,000	110V	60W LED	110-1575
LIND	Beacon980-CART-W	Dual head cart	240 ft	Flood LED	60,000	110V	(2) 200W LED	110-1555
Powermoon	PL600LED	Diffused	30 ft	Balloon LED	75,000	110V	600W LED	110-1580
LIND	LE360LEDS-10PIOC	String	20 ft	Bulb LED	2,400	120V	20W LED	913-5205
LIND	LE360LED-25P25C	String	50 ft	Lamp LED	14,300	120V	100W LED	913-5206
LIND	LE-HB120LED-25P25C	High bay	50 ft	Lamp LED	15,250	120V	120W LED	913-5208

HAZARDOUS LOCATION LIGHTING



Explosion-proof lights are designed and approved to be used in hazardous locations by incorporating incandescent, explosion-proof hand lamps into sturdy t-drops and cable.

Features include:

- Stringlights are 50-feet long and feature lights every 10 feet
- Interchangeable anti-glare diffusers
- Thermal temperatures rated at T5



MAKE	MODEL	TYPE	VOLTAGE	LUMENS	APPROVALS	CAT CLASS
LIND	XP65LED-50P	LED Tubular Inspection Light	120V	1x250	cULus Certified for Class I, Division 1, Group D. Class II, Division 1, Group G	110-2043
LIND	TLS80XPLEDRE-LV	Low Voltage String Light 80 ft LED	12V	8x800	cQPSus listed for Class I, Division 1, Groups C & D hazardous locations (CSA and UL standards)	110-2055
LIND	XP162LED-50P	Hand Lamp LED 50 ft Cord	120V	1x800	cULus Certified for Class I, Division 1, Group D. Class II, Division 1, Group G	110-2000
LIND	XP980LED	LED Flood Light	110V	1x24,000	Class I, Division 1, Groups B,C & D, Class II, Groups E,F & G	110-2049

METAL HALIDE LIGHT TOWERS

Features include:

- Kubota diesel engine
- Tow behind
- Ideal for construction, road projects, parking lot security, and nighttime events

UP TO 246,300
LUMENS

UP TO 90 HR
MAX RUN TIME









GENERAC MOBILE



MAKE	MODEL	TYPE	MAST HEIGHT	MAST TYPE	GENERATOR	POWER	LIGHTS	RUN TIME	FUEL BURN	WIND SPEED RATING	CAT CLASS
Generac Mobile	MLT6SK	Towable	23 ft	Vertical	6 kW	Diesel	(4) 1,050W	90 hr max	.42 gph	65 mph	510-1030

Modern Lighting Solutions

Longer run times, reduced emissions and maximized efficiency. Modern lighting solutions are all about keeping you working safely and effectively night or day.

 <p>Dusk to Dawn Sensor Automatically turns the light tower on or off based on the amount of ambient light detected.</p>	 <p>Shore Power Allows a light tower to be plugged into a wall or generator.</p>
 <p>Digital Controller Maximizes efficiency by enabling a light tower to be automatically turned on or off based on predetermined time parameters.</p>	 <p>4-Way Forklift Pockets Quick and easy maneuvering and mobility.</p>
 <p>Daisy Chain Link multiple light towers in a sequence and power from a single source.</p>	 <p>110% Contained Double walled and built in weather proof containment. No need for pans or basins.</p>
 <p>City Silent Designed to be used in sensitive work environments where noise pollution must be kept to a minimum.</p>	 <p>ECOCLEAN Environmentally-friendly product.</p>


Add a fuel tank for extended run times.



CUBE+ HYPER
Run Time: 300 Hours



ADD a Fuel Tank to EXTEND Run Times.

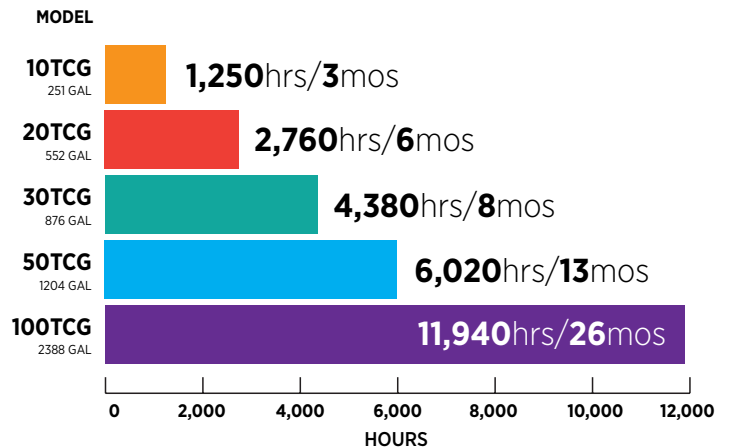

ENGINE DRIVEN LED TOWERS



Features include:

- Durable and reliable with easy set-up and operation
- Ability to link two light towers together provides even more illumination
- Efficient engine reduces fuel consumption by 60% vs traditional metal halide light towers
- Built in double-walled spill containment

GENERAC MOBILE



UP TO 184,000 LUMENS

UP TO 300 HR MAX RUN TIME



MAKE	MODEL	TYPE	MAST HEIGHT	GENERATOR	POWER	LIGHTS	RUN TIME	FUEL BURN	WIND SPEED RATING	CAT CLASS
Generac Mobile	G4 ECO2	Towable	23 ft	4 KW	Diesel	(4) 320W	212 hr	.20 gph	68 mph	510-1055
Generac Mobile	G4 ECO	Towable	26 ft	4 KW	Diesel	(4) 320W	205 hr	.20 gph	68 mph	510-1055
Generac Mobile	Cube+ Hyper	Skid	27.5 ft	4 KW	Diesel	(4) 320W	300 hr	.20 gph	50 mph	510-1160

ELECTRIC LED LINK-TOWERS



Features include:

- Stabilizing outriggers enable towers to withstand windy conditions
- Ideal for construction, outdoor events, sports venues, increased parking lot security, and more

GENERAC MOBILE



UP TO 154,000 LUMENS


UNLIMITED RUN TIME



MAKE	MODEL	TYPE	MAST HEIGHT	POWER	LIGHTS	RUN TIME	FUEL BURN	WIND SPEED RATING	CAT CLASS
Generac Mobile	Link-Tower PLT240	Manual push	16 ft	120V/15A-20A	(4) 240W	Unlimited	0 gph	45 mph	510-1080
Allmand	Link-Tower Night-Lite E-Series	Manual push	23 ft	115V/15A	(4) 250W	Unlimited	0 gph	50 mph	510-1082
Allmand	Link-Tower Mobile	Towable	23 ft	120V/15A-20A	(4) 250W	Unlimited	0 gph	50 mph	510-1084



Control your light towers from any device, anywhere

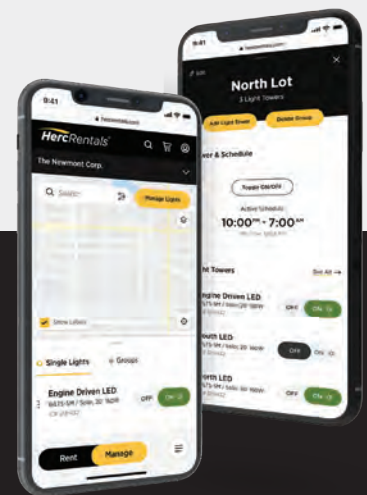

- Turn light towers on or off from anywhere
- Enhanced safety measures and alerts when turning towers on or off
- Reduce labor costs
- Create schedules and groups
- Set up and manage alerts
- Added security to protect job site
- View power status and schedules by single lights or groups
- Activate or deactivate schedules on demand

Learn more at [HercRentals.com](https://www.herc.com)

ProControl
NextGen™

SOLAR LED TOWERS



Features include:

- Stabilizing outriggers enable towers to withstand windy conditions
- Ideal for construction, outdoor events, sports venues, increased parking lot security, and more







UP TO 104,800 LUMENS

UNLIMITED RUN TIME




MAKE	MODEL	MAST HEIGHT	BATTERY CAPACITY	POWER	LIGHTS	RUN TIME	FUEL BURN	WIND SPEED RATING	CAT CLASS
National	EventLite	17 ft	N/A Built-in	(2) 70W Monocrystalline Solar Collectors	(2) 25W	Unlimited	0 gph	65 mph	510-1010
National	LTS 160	20 ft	660A hr	1,000W Solar Array or 115V/15-20a	(4) 160W	Unlimited	0 gph	60 mph	510-1015
Wanco	WLTS-SM	20 ft	400A hr	600W Solar Array or 120V/20a	(4) 50W	Unlimited	0 gph	60 mph	510-1020

SOLAR PERFORMANCE GUIDE

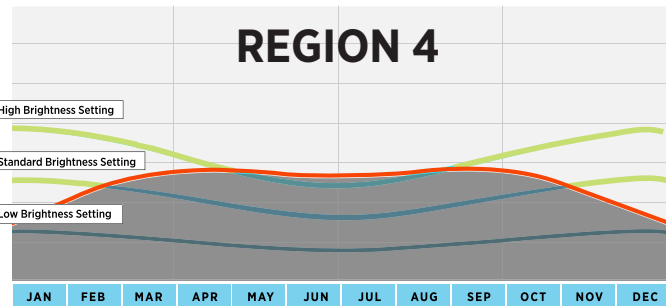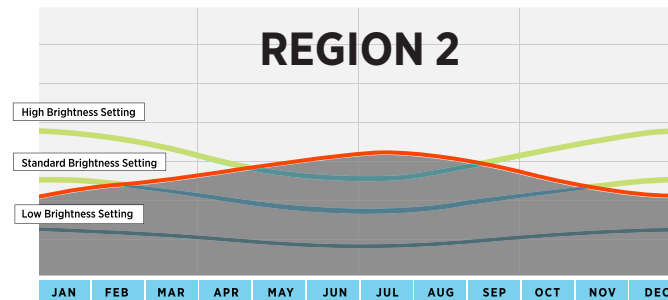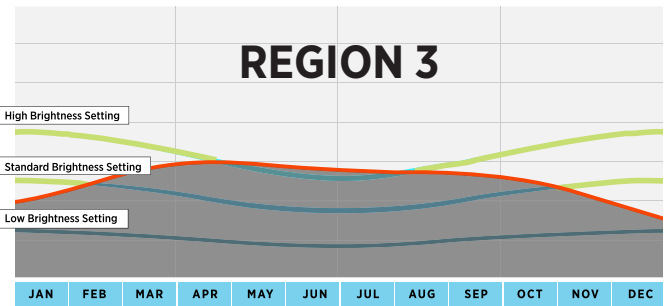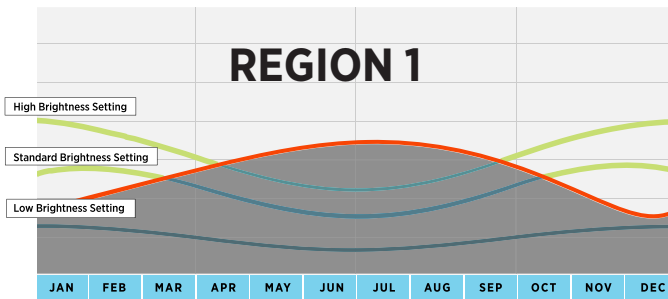

AVAILABLE DAILY SUN HOURS	NO CHARGING REQUIRED	REQUIRES CHARGING
---------------------------	----------------------	-------------------

*Runtimes may vary based on brightness settings, sun exposure and usage.

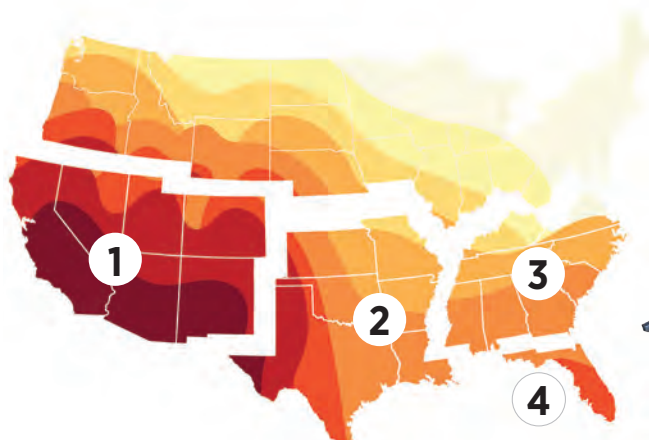

NATIONAL SIGNAL LTS 160 SOLAR TOWER

*Calculated run times on full charge with no additional charge








RUN TIME	BRIGHTNESS
23 Hr	High
34 Hr	Medium
68 Hr	Low

LIGHTING PERFORMANCE CHART


With the advances in lighting technology, the new generation of LED light towers will match or beat the brightness of a traditional 1,000-watt metal-halide light tower at a reduced operating cost.

50%+ reduction in energy usage/fuel consumption
 Extend run times up to 300%
 Instant on/off

Reduced heat
 No bulb-changing
 Digital controller for increased efficiency

	METAL HALIDE		LED LIGHT TOWERS				
							
MAKE/MODEL	GENERAC MLT6SK	GENERAC G4 ECO2	GENERAC CUBE+ HYPER	GENERAC PLT240	ALLMAND NIGHT-LITE E-SERIES	WANCO WLTS-SM	NATIONAL SIGNAL LTS 160
LUMENS	246,300	188,000	184,000	88,000	154,000	20,100	104,800
FUEL CONSUMPTION PER HOUR	0.42 gal	0.20 gal	0.20 gal	0 gal	0 gal	0 gal	0 gal
DIESEL PRICE PER GALLON AVG.	\$5.27	\$5.27	\$5.27	n/a	n/a	n/a	n/a
FUEL COST PER HOUR	\$2.21	\$1.05	\$1.05	\$0.10	\$0.13	\$0	\$0
RUN HOURS PER SHIFT	10	10	10	10	10	10	10
OPERATING COST PER MONTH*	\$442	\$210	\$210	\$20	\$26	\$0	\$0
MAX RUN TIME	90 Hours	212 Hours	300 Hours	Unlimited	Unlimited	Unlimited	Unlimited

*10 hour shifts per day x 20 workdays per month

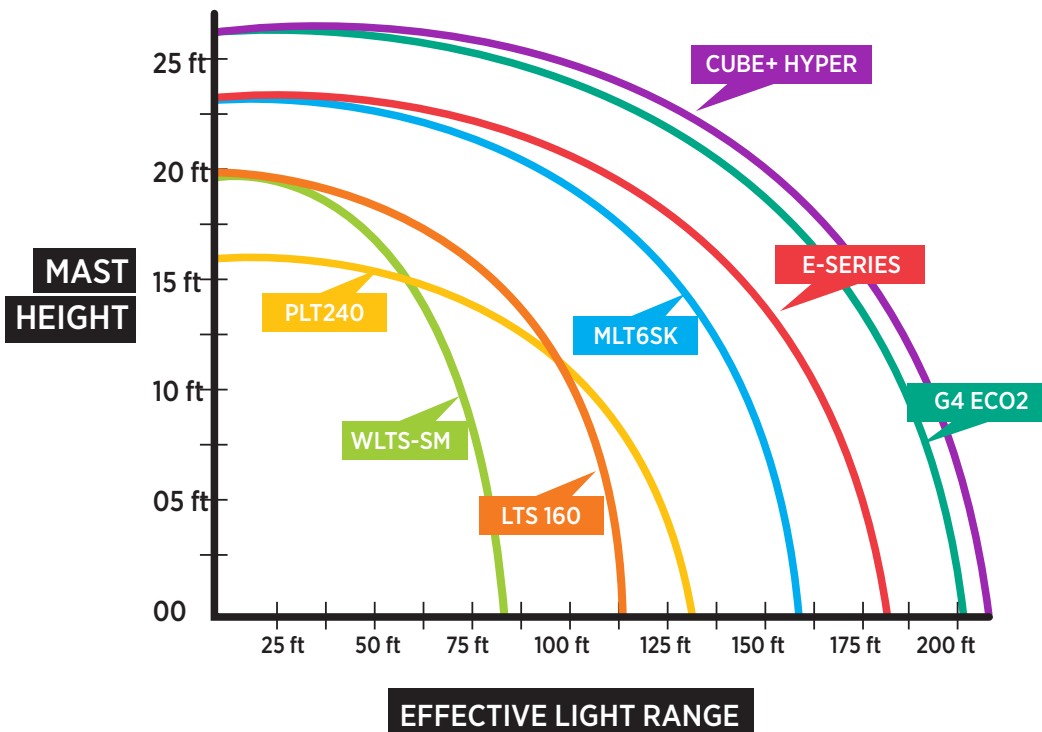



MATERIAL HANDLING



Pallet Jacks
Walkie Stackers
Stand-up Rider Forklifts
Electric Forklifts
Standard Capacity Forklifts
High Capacity Forklifts

Telehandlers
Rough Terrain Forklifts
Hand Trucks and Dollies
Material Lifts
Gantry Cranes
Jacks and Cylinders

Chain Hoists
Portable Conveyors
Glass Lifts
Crawler Cranes
Pick and Carry Cranes
Carry Deck Cranes

QUICK REFERENCE GUIDE

		Ground level transport only	Lifting and stacking	Order picking	Indoor use	Outdoor and uneven surface	Electric
WAREHOUSE FORKLIFTS	3,000 LB PNEU DF 8FGU15 / CC 450-2020						
	4,000 LB 3W SIT ELEC 8FBE20U / CC 450-2090						
	5,000 LB PNEU DF 8FGU25 / CC 450-2120						
	5,000 LB CUSHION ELEC 8FBCU25 / CC 450-2140						
	5,000 LB LOWPRO PNEU DF 8FGU25LOW / CC 450-2160						
	6,000 LB 4MAST PNEU DF 8FGU30 / CC 450-2240						
	8,000 LB PNEU DSL 8FD35U / CC 450-2260						
	8,000 LB PNEU DF 8FG35U / CCS 450-2270						
	10,000 LB PNEU DF 8FG45U / CC 450-2320						
	10,000 LB PNEU DSL 8FD45U / CC 450-2310						
	15,500 LB PNEU DSL 8FD70U / CC 450-2370						
	26,000 LB PNEU DSL THD2600-24 / CC 450-2430						
	36,000 LB PNEU DSL THD3600-24 / CC 450-2450						
WALKIE STACKERS	3,000 LB COUNT ELEC 6BWC15 / CC 480-1230						
	2,500 LB STRADDLE ELEC 8BWS13 / CC 480-1224						
	4,000 LB COUNT ELEC 6BWC20 / CC 480-1240						
	4,000 LB STRADDLE ELEC 6BWS20 / CC 480-1239						
WALKIE LIFT	6,000 LB ELEC 8HBE30 / CC 480-1280						
	4,500 LB ELEC 8HBW23 / CC 480-1260						

PALLET JACKS

Built tough for industrial conditions, resistant to damage and spills and perfect for retail and warehouse receiving operations.

Features include:

- Up to 48-inch fork lengths
- Max fork heights from 7.5-inches to 31.5 inches

UP TO 8,000 LB
LOAD CAPACITY



MAKE	MODEL	TYPE	FORK LENGTH	LOAD CAPACITY	MAX FORK HEIGHT	POWER TYPE	DIMENSIONS (LWH)	WEIGHT	CAT-CLASS
Dayton	2ZE57	Pallet jack	48 in	5,500 lb	7.5 in	Manual	63 in / 27 in / 48 in	185 lb	480-1135
Dayton	2ZE58	Narrow pallet jack	48 in	5,500 lb	7.75 in	Manual	61-7/8 in / 20.5 in / 48 in	180 lb	480-1130
Dayton	2ZE60	Pallet jack	48 in	8,000 lb	7.5 in	Manual	63 in / 37 in / 48 in	180 lb	480-1140
Toyota	8HBW23	Electric pallet jack	48 in	4,500 lb		Electric 24V	71.9 in / 28 in / 47.2 in		480-1260

WALKIE STACKERS



Designed to take on the most demanding warehouse applications.

Features and Applications include:

- AC drive with 110V plug-in onboard charger
- Ideal for retail store back rooms, manufacturing and dock to stock applications.

UP TO 6,000 LB
LOAD CAPACITY

TOYOTA



MAKE	MODEL	LOAD CAPACITY	FORK LENGTH	OPERATING WEIGHT W/ BATTERY	FLOOR LOAD W/ MAX CAPACITY*	TRAVEL SPEED W/ FULL LOAD	POWER TYPE	MINIMUM AISLE WIDTH	DIMENSIONS (LWH)*	CAT-CLASS
Toyota	8BWS13	2,500 lb	42 in	2,210 lb	Front wheel 226 psi per wheel (2) rear wheel 858 psi	3.4 mph	Electric 24V	7 ft	61.3 in / 28 in / 72 in	480-1224
Toyota	6BWS20	4,000 lb	42 in	3,809 lb	Front wheel 536 psi per wheel (2) rear wheel 235 psi	2.6 mph	Electric 24V	7 ft	89.9 in / 34.1 in / 71 in	480-1239
Toyota	6BWC20	4,000 lb	42 in	6,400 lb	Front wheel 130 psi per wheel (2) rear wheel 352 psi	2.8 mph	Electric 24V	10 ft	76.6 in / 34.1 in / 71 in	480-1240
Toyota	8HBE30	6,000 lb	48 in	2,734 lb	Front wheel 154 psi per wheel (2) rear wheel 171 psi	8.8 mph	Electric 24V	85 ft	90.4 in / 36 in / 56.7 in	480-1280
Toyota	8HBE30	6,000 lb	96 in	2,910 lb	Front wheel 157 psi per wheel (2) rear wheel 174 psi	8.8 mph	Electric 24V	142 ft	138.8 in / 36 in / 56.7 in	480-1282

*Dimensions to fork face

STAND-UP RIDER FORKLIFTS



Versatile and slender, these stand-up forklifts are designed to navigate narrow aisles while maintaining the strength to lift, stack and place items.

Features include:

- High-visibility mast and overhead guard, dual electric disc brakes and cornering speed control
- Short term and long term charging options

UP TO 4,000 LB
LOAD CAPACITY

TOYOTA



*Dimensions to fork face

MAKE	MODEL	LOAD CAPACITY	FORK LENGTH	MAX FORK HEIGHT	MAX LOWERED HEIGHT	OPERATING WEIGHT W/ BATTERY	TRAVEL SPEED W/ FULL LOAD	POWER TYPE	MIN AISLE WIDTH	DIMENSIONS W/ FORKS (LWH)	DIMENSIONS (LWH)*	CAT-CLASS
Toyota	8BNCU18	3,500 lb	42 in	188 in	83 in	8,677 lb	7.5 mph	Electric 36V	10 ft	110.5 in / 41 in / 88 in	68.5 in / 41 in / 88 in	450-2055
Toyota	8BNCU20	4,000 lb	42 in	188 in	83 in	9,200 lb	7.5 mph	Electric 36V	10 ft	112.5 in / 41 in / 88 in	70.5 in / 41 in / 88 in	450-2057

ELECTRIC INDUSTRIAL FORKLIFTS



Features include:

- Exclusive System of Active Stability™ enhances operator safety
- Available with non-marking tires
- Short term or long term charging options on most models
- Attachments available

UP TO 5,000 LB
LOAD CAPACITY

UP TO 189 IN
MAX FORK HEIGHT

TOYOTA



MAKE	MODEL	LOAD CAPACITY	FORK LENGTH	MAX FORK HEIGHT	MAX LOWERED HEIGHT	OPERATING WEIGHT W/ BATTERY	FLOOR LOAD W/ MAX CAPACITY*	TRAVEL SPEED W/ FULL LOAD	POWER	MIN AISLE WIDTH	DIMENSIONS (LWH)*	CAT-CLASS
Toyota	8FBE20U	4,000 lb	42 in	189 in 3 stage mast	83.5 in	7,420 lb	Front wheel 179 psi per wheel (2) rear wheel 87 psi	9.7 mph	48V	11 ft	77.2 in / 41.5 in / 83.5 in	450-2090
Toyota	8FBCU25	5,000 lb	42 in	189 in 3 stage mast	83.3 in	9,759 lb	Front wheel 161 psi per wheel (2) rear wheel 114 psi	11.5 mph	48V	12 ft	84.5 in / 41.9 in / 88 in	450-2140

ELECTRIC FORKLIFT BATTERY CHARGER GUIDE

EQUIPMENT MODEL	WATERING INTERVAL	CHARGER TYPE	SHORT TERM RENTAL CHARGER (MAXIMUM 2 WEEK RENTALS)	CAT-CLASS	LONG TERM RENTAL CHARGER (3+ WEEKS AND LONGER)	CAT-CLASS
8HBW23	None	Built In 120V	Use on-board charger	N/A	Use on-board charger	N/A
8HBE30	90 Days	Built In 120V	Use on-board charger	N/A	Use on-board charger	N/A
8BWS13	None	Built In 120V	Use on-board charger	N/A	Use on-board charger	N/A
6BWS20	90 Days	Built In 120V	Use on-board charger	N/A	Use on-board charger	N/A
6BWC20	90 Days	Built In 120V	Use on-board charger	N/A	Use on-board charger	N/A
8FBE20U	90 Days	External	EHIMV48S140 110V Plug-in	490-1690	EHIMV80M200 208-240/480V 3PH	490-1695
8FBCU25	90 Days	External	EHIMV48S140 110V Plug-in	490-1690	EHIMV80M200 208-240/480V 3PH	490-1695
8FBM25T	90 Days	External	EHIMV80M250 208-240/480V 3PH	490-1695	EHIMV80M250 208-240/480V 3PH	490-1695

LP INDUSTRIAL FORKLIFTS

Features include:

- Standard or low profile overall height
- Operates on liquid propane
- Solid pneumatic non-marking tires

UP TO 6,000 LB
LOAD CAPACITY

UP TO 240 IN
MAX FORK HEIGHT

TOYOTA



MAKE	MODEL	LOAD CAPACITY	FORK LENGTH	MAX FORK HEIGHT	MAX LOWERED HEIGHT	OPERATING WEIGHT W/ BATTERY	FLOOR LOAD W/ MAX CAPACITY*	TRAVEL SPEED W/ FULL LOAD	POWER	MIN AISLE WIDTH	DIMENSIONS (LWH)*	CAT-CLASS
Toyota	50-8FGU25	5,000 lb	42 in	189 in 3 stage mast	84.5 in	7,840 lb	Front wheel 160 psi per wheel (2) rear wheel 87 psi	10.9 mph	LP	13 ft	104.7 in / 45.3 in / 84.5 in	450-2122
Toyota	50-8FGU25 LOWPRO	5,000 lb	42 in	189 in 3 stage mast	84.5 in	7,640 lb	Front wheel 160 psi per wheel (2) rear wheel 99 psi	10.9 mph	LP	13 ft	104.7 in / 45.3 in / 79.1 in	450-2165
Toyota	50-8FGU30	6,000 lb	42 in	240 in 4 stage mast	84.8 in	10,850	Front wheel 160 psi per wheel (2) rear wheel 87 psi	11.2 mph	LP	13.5 ft	110.5 in / 48.8 in / 85.5 in	450-2242

*Dimensions to fork face

STANDARD CAPACITY INTERNAL COMBUSTION FORKLIFTS

Features include:

- Standard or low profile overall height
- Operates on gasoline or liquid propane
- Solid pneumatic non-marking tires

UP TO 5,000 LB
LOAD CAPACITY

UP TO 189 IN
MAX FORK HEIGHT

TOYOTA

8FGU25 LOW
LOW PROFILE
79.1 CLEARANCE



MAKE	MODEL	LOAD CAPACITY	FORK LENGTH	MAX FORK HEIGHT	MAST LOWERED HEIGHT	OPERATING WEIGHT	FLOOR LOAD W/ MAX CAPACITY**	TRAVEL SPEED W/ FULL LOAD	POWER TYPE	MIN AISLE WIDTH	DIMENSIONS (LWH)*	CAT-CLASS
Toyota	8FGU15	3,000 lb	42 in	189 in 3 stage mast	84.4 in	5,500 lb	Front wheel 174 psi per wheel (2) rear wheel 105 psi	11.5 mph	Dual fuel - Gas or LP	11 ft	88.6 in / 42.1 in / 84.4 in	450-2020
Toyota	8FGU25	5,000 lb	42 in	189 in 3 stage mast	84.5 in	7,840 lb	Front wheel 160 psi per wheel (2) rear wheel 99 psi	10.9 mph	Dual fuel - Gas or LP	13 ft	104.7 in / 45.3 in / 84.5 in	450-2120
Toyota	8FGU25 LOWPRO	5,000 lb	42 in	170 in 3 stage mast	78.5 in	7,840 lb	Front wheel 160 psi per wheel (2) rear wheel 99 psi	10.9 mph	Dual fuel - Gas or LP	13 ft	104.7 in / 45.3 in / 79.1 in	450-2160
Toyota	8FDU25	5,000 lb	42 in	189 in 3 stage mast	84.5 in	7,990 lb	Front wheel 160 psi per wheel (2) rear wheel 99 psi	10.7 mph	Diesel	13 ft	104.7 in / 45.3 in / 84.5 in	450-2110

MID CAPACITY INTERNAL COMBUSTION FORKLIFTS

Designed for long days on construction sites, the lumber yard and many other outdoor applications.

Features include:

- Dash-mounted instrument display
- Fork positioners available on most models
- Available in fork lengths
- System of Active Stability™

UP TO 10,000 LB
LOAD CAPACITY

UP TO 240 IN
MAX FORK HEIGHT

TOYOTA




MAKE	MODEL	LOAD CAPACITY	FORK LENGTH	MAX FORK HEIGHT	MAST LOWERED HEIGHT	OPERATING WEIGHT	TRAVEL SPEED W/ FULL LOAD	POWER TYPE	MIN AISLE WIDTH	DIMENSIONS (LWH)*	CAT-CLASS
Toyota	8FDU30	6,000 lb	42 in	187 in 3 stage mast	84.5 in	10,990 lb	10.7 mph	Diesel	13.5 ft	110.5 in / 48.8 in / 85.5 in	450-2180
Toyota	8FGU30	6,000 lb	42 in	240 in 4 stage mast	84.8 in	10,850 lb	11.2 mph	Dual fuel - Gas or LP	13.5 ft	110.5 in / 48.8 in / 85.5 in	450-2240
Toyota	8FD35U	8,000 lb	42 in	187 in 3 stage mast	90.2 in	12,820 lb	13.1 mph	Diesel	14 ft	116.3 in / 53.1 in / 90.2 in	450-2260
Toyota	8FG35U	8,000 lb	42 in	187 in 3 stage mast	90.2 in	12,640 lb	13.7 mph	Dual fuel - Gas or LP	14 ft	116.3 in / 53.1 in / 90.2 in	450-2270
Toyota	8FG45U	10,000 lb	60 in	187 in 3 stage mast	92.5 in	14,650 lb	13.7 mph	Dual fuel - Gas or LP	16 ft	123.6 in / 57.1 in / 92.5 in	450-2320
Toyota	8FD45U	10,000 lb	60 in	187 in 3 stage mast	92.5 in	14,650 lb	13.1 mph	Diesel	16 ft	123.6 in / 57.1 in / 92.5 in	450-2310

Get the app



Search and filter for better results

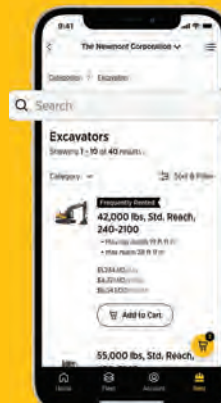

Product details under your thumb



HIGH CAPACITY INTERNAL COMBUSTION FORKLIFTS

Built to conquer extremely heavy applications, ranging from lifting and moving large items such as shipping containers, oversize boats, steel, lumber and concrete on construction sites.

Features include:

- Solid pneumatic tires
- Non-marking tires available
- Propane option for 15k models
- Deluxe cab with AC on 26-55k models

UP TO 36,000 LB
LOAD CAPACITY

UP TO 187 IN
MAX FORK HEIGHT
TOYOTA



MAKE	MODEL	LOAD CAPACITY	FORK LENGTH	MAX FORK HEIGHT	MAST LOWERED HEIGHT	OPERATING WEIGHT	TRAVEL SPEED W/ FULL LOAD	POWER TYPE	MIN AISLE WIDTH	DIMENSIONS (LWH)	CAT-CLASS
Toyota	8FD70U	15,500 lb	72 in	187 in 3 stage mast	100.4 in	19,980 lb	11.8 mph	74 hp Diesel	19 ft	140.9 in / 77.5 in / 100.4 in	450-2370
Toyota	8FG70U	15,500 lb	72 in	187 in 3 stage mast	100.4 in	20,490 lb	11.8 mph	74 hp Dual fuel - Gas or LP	19 ft	140.9 in / 77.4 in / 94.5 in	450-2380
Toyota	THD2600-24	26,000 lb	96 in	144 in 2 stage mast	142 in	44,140 lb	20 mph	160 hp Diesel	26 ft	185.9 in / 103 in / 142 in	450-2435
Toyota	THD3600-24	36,000 lb	96 in	144 in 2 stage mast	142 in	46,981 lb	20 mph	160 hp Diesel	26 ft	211 in / 103 in / 142 in	450-2455

*Dimensions to fork face

FORKLIFT ATTACHMENTS

TYPE	MODEL	DESCRIPTION	CAT-CLASS
Lift Hook	1371B	12,000 lb Lift Capacity	490-1000
Lift Hook and Trailer Hitch	1390B	10,000 lb Tow Capacity	490-1004
Carpet Pole	5020-12	12 ft carpet pole	490-1030
Dumping Hopper	1820	2 Yard Bin Dumper	490-1215
Jib Hoist	1360B	6,000 lb Lift Capacity	490-1020
Fork Rotator	55G-RRB-30B	4,500 lb Capacity	490-1079
Truss Boom	1302	10,000 lb Lift Capacity	490-1010


HercRentals®

**We'll give you the tools...
you provide the talent**

Learn more at
careers.hercrentals.com



TELEHANDLER LOAD CHART

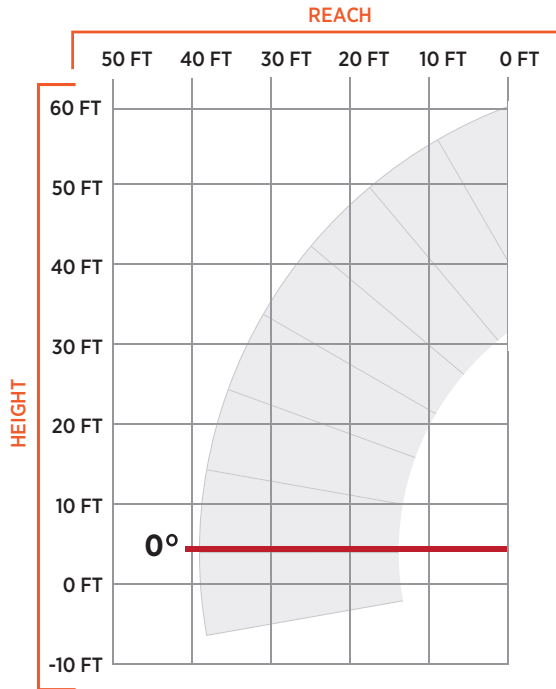

10,000 LB TELEHANDLERS

Compare the 42 FT to the 54 FT

LIFT HEIGHT



MODEL	CAT-CLASS	LOAD WEIGHT	OUTRIGGERS UP	OUTRIGGERS DOWN
10042	460-1060	6,000 LB	UP TO 42 FT	UP TO 42 FT
		8,000 LB	UP TO 37 FT	UP TO 37 FT
10054	460-1070	6,000 LB	UP TO 37 FT	UP TO 37 FT
		8,000 LB	UP TO 21 FT	UP TO 21 FT

CAPACITY AT MAX LIFT HEIGHT

42 FT = 6,000 LB
54 FT = 4,000 LB

Outriggers Down

CAPACITY AT MAX REACH

26 FT = 6,000 LB
39 FT = 3,000 LB

Outriggers Down

If total load is:
8,000 LB

42 FT

Telehandler can lift up to **37 FT** with the Outriggers Up or Down

54 FT

Telehandler can lift up to **21 FT** with the Outriggers Up or Down

Always refer to OEM's operations manual load charts for your specific application.

Rated lift capacities are shown for telehandlers equipped with carriage and pallet forks.

Using other methods for lifting such as chains, jibs, slings, etc., will change and alter lift capacities. Follow OSHA approved lifting methods including standard rigging safety guidelines.

Suspended loads should never be attached to chains or slings over the fork carriage.

Be sure to look at the telehandlers' load chart that corresponds with the attachment being used before starting the work.

Generally, fork carriage load charts are based on a horizontal load center that is 24 inches from the front vertical surface of the fork area.

Factors That Change The Load Capacity

- Carriage Type
- Vertical Lift Height
- Horizontal Reach Length
- Boom Angle

TELEHANDLERS

Telehandler forklifts are designed for uses in construction, masonry and agriculture.

Features include:

- Tight turn radius
- Towing
- 4WD and 4WD steering
- Higher ground clearance

UP TO 20,000 LB
MAX LOAD CAPACITY

UP TO 56 FT
MAX LIFT HEIGHT

SKYJACK simply reliable **JLG** **Genie.**



MAKE	MODEL	TYPE	MAX LOAD CAPACITY	MAX LIFT HEIGHT	MAX FORWARD REACH	DIMENSIONS (LWH)	WEIGHT	CAT-CLASS
Skytrak	3013	Telescopic	2,700 lb	13 ft	7 ft 1 in	8 ft 9 in / 55 in / 79 in *	5,280 lb	460-1000
JLG	G5-18A	Telescopic	5,512 lb	18 ft	11 ft	12 ft / 6 ft / 6 ft 4 in	11,000 lb	460-1010
Genie	GTH-5519	Telescopic	5,500 lb	18 ft 10 in	11 ft 3 in	12 ft 3 in / 5 ft 11 in / 6 ft 6 in	10,360 lb	460-1010
Skytrak	6036	Telescopic	6,000 lb	36 ft 1 in	22 ft 4 in	18 ft / 9 ft 4 in / 8 ft 3 in	21,300 lb	460-1020
Skytrak	8042	Telescopic	8,000 lb	41 ft 11 in	26 ft 7 in	19 ft / 8 ft 3 in / 8 ft 3 in	27,100 lb	460-1040
Skytrak	10042	Telescopic	10,000 lb	42 ft 1 in	26 ft 7 in	20 ft 8 in / 8 ft 6 in / 8 ft 4 in	27,300 lb	460-1060
Skytrak	10054	Telescopic	10,000 lb	53 ft 2 in	38 ft 9 in	21 ft / 8 ft 6 in / 8 ft 4 in	28,200 lb	460-1070
Genie	GTH-1056	Telescopic	10,000 lb	56 ft 10 in	42 ft	22 ft / 8 ft 6 in / 8 ft 6 in	30,000 lb	460-1070
JLG	1255	Telescopic	12,000 lb	55 ft	42 ft	20 ft 1 in / 8 ft 5 in / 8 ft 4 in	33,960 lb	460-1080
JLG	1644	Telescopic	15,650 lb	43 ft 7 in	31 ft 1 in	20 ft 3 in / 8 ft 1 in / 8 ft 9 in *	33,660 lb	460-1087
JLG	1732	Telescopic	16,755 lb	31 ft 8 in	18 ft 7 in	19 ft 5 in / 8 ft 1 in / 8 ft 9 in *	31,145 lb	460-1088
Skyjack	ZB2044	Telescopic	20,000 lb	44 ft 10 in	27 ft 5 in	20 ft 3 in / 8 ft 6 in / 9 ft	45,000 lb	460-1090

* Less forks

ROUGH TERRAIN STRAIGHT MAST FORKLIFT

Get the job done fast and easy with nimble balance on uneven terrain, high-performing lift capabilities, operator comfort and visibility.

Features include:

- Push-button parking brake
- Eye-level operator instrument cluster
- Available 4WD
- Narrow zero-tail swing design

8,000 LB
MAX LOAD CAPACITY

UP TO 22 FT
MAX FORK HEIGHT

CASE
CONSTRUCTION



MAKE	MODEL	LOAD CAPACITY	MAX FORK HEIGHT	DIMENSIONS (LWH)	WEIGHT	CAT-CLASS
Case	586	6,000 lb	22 ft	16 ft 2 in. / 6 ft 9 in / 10 ft 6 in	13,360 lb	455-1020
Case	588	8,000 lb	22 ft	17 ft 11 in / 6 ft 9 in / 10 ft 6 in	16,102 lb	455-1040

HAND TRUCKS AND DOLLIES

With overall weight ranging from 11 to 149 pounds and the capability of lifting and moving heavy materials.

UP TO 16,000 LB
LOAD CAPACITY



MAKE	MODEL	TYPE	VOLUME CAPACITY	LOAD CAPACITY	DIMENSIONS (LWH)	WEIGHT	CAT-CLASS
Johnson Bar	29AK53	Pry Lever dolly	N/A	5,000 lb	60 in / 10.5 in / 5 in	43 lb	911-3325
Grainger	48LW43	Heavy duty tilt debris cart	1/2 cu yd	1,350 lb	59-1/4 in / 27-3/4 in / 34-7/8 in	92 lb	930-2073
Grainger	48LW45	Heavy duty tilt debris cart / forkliftable	1 cu yd	2,200 lb	70 in / 33-7/8 in / 43-1/8 in	149 lb	930-2076
Hilman	KRS-8-4S	Roller set	N/A	16,000 lb	6-1/2 in / 4-1/8 in	85 lb	480-1340
Grainger	35YM02	General purpose dolly	N/A	1,200 lb	30 in / 18 in / 6-1/2 in	15 lb	930-2228

MATERIAL LIFTS

These lifts, including stacker lifts, contractor lifts, pneumatic material lifts, Roust-A-Bouts, Rol-A-Lifts, electric hand trucks, gantry cranes, drywall/sheetrock lifts, duct lifts and stair-climber dollies.

UP TO 6,000 LB
MAX LOAD CAPACITY

UP TO 25 FT
MAX LIFT HEIGHT

SUMNER



MAKE	MODEL	TYPE	LOAD CAPACITY	MAX HEIGHT	POWER TYPE	OPERATING DIMENSIONS (LWH)	WEIGHT	CAT-CLASS
Genie	GH3.8	Pneumatic material lift	300 lb	12 ft 5-1/2 in	CO2 (Tank required)	17 in / 53 in / 41 in	75 lb	480-3500
Sumner	2010	Contractor lift - outriggers	1,000 lb	11 ft 7-1/8 in	Manual winch	62 in / 74 in / 76 in	223 lb	480-3460
Sumner	2412	Contractor lift - no outriggers	450 lb	13 ft	Manual winch	48 in / 26.4 in / 62.8 in	195 lb	480-3475
Sumner	2416	Contractor lift - outriggers	450 lb	17 ft	Manual winch	48 in / 55.3 in / 62.8 in	243 lb	480-3525
Sumner	2118	Contractor lift - outriggers	650 lb	18 ft	Manual winch	73 in / 74 in / 84 in	321 lb	480-3540
Sumner	2124	Contractor lift - outriggers	650 lb	24 ft	Manual winch	73 in / 74 in / 84 in	399 lb	480-3600
Sumner	2012S	Contractor lift - outriggers	800 lb	13 ft	Manual winch	62 in / 74 in / 63.5 in	320 lb	480-3630
Sumner	2615	Contractor lift - outriggers	1,100 lb	15 ft	Manual winch	62 in / 74.5 in / 76.5 in	346 lb	480-3660
Sumner	R-150	Roust-A-Bout	1,500 lb	15 ft	Manual winch	40 in / 40 in / 79 in	336 lb	480-1925
Sumner	R-250	Roust-A-Bout	1,500 lb	25 ft	Manual winch	60 in / 60 in / 119 in	493 lb	480-1920
Sumner	2311	Drywall lift	99 lb	11 ft 2-3/4 in	Manual winch	55 in / 55 in / 52 in	109 lb	100-7030
Powermate	M1	Stair climber	650 lb	5 ft	12V battery	16.5 in / 24 in / 60 in	75 lb	480-1060
Skarnes	M-4-6	Rol-A-Lift	4,000 lb 6,000 lb	12 in 6 in	Hydraulic jack	10 in / 23 in / 44 in	340 lb/pair	480-1080
Makinex	PHT-140	Hand truck - electric	309 lb	6 ft 3 in	12V battery	76.8 in / 33 in / 13 in	121 lb	480-3040

GANTRY CRANES

Easy to assemble and easy to move safely under their full-rated load.

UP TO 11,000 LB
LOAD CAPACITY



MAKE	MODEL	LOAD CAPACITY	BEAM LENGTH	LEG SPAN	DIMENSIONS (LWH - MIN/MAX HEIGHT TO LIFT RING)	WEIGHT	CAT-CLASS
EME	4400T	4,400 lb	15 ft	67 in	180 in / 61 in / 113.5 / 153.5 in	355 lb	480-3065
EME	4400M	4,400 lb	8 ft	48 in	96 in / 61 in / 81.5 / 111.5 in	240 lb	480-3065
EME	6600R	9,900 lb	15 ft	70 in	180 in / 72 in / 106 / 162 in	575 lb	480-3080
EME	11000R	11,000 lb	15 ft	70 in	180 in / 73 in / 105.5 / 153.5 in	725 lb	480-3100

JACKS AND CYLINDERS

These low-height cylinders provide the maximum power-to-height ratio and are designed to work in confined spaces where other cylinders cannot fit.

Features include:

- Used for lifting, pushing, pulling, and holding
- Compatible with manual or electric pumps

UP TO 100 TON
LOAD CAPACITY



MAKE	MODEL	CAPACITY	STROKE	HEIGHT	CAT-CLASS
Enerpac	RSM-50	5 Ton	5/8 in	4.88 in	481-1012
PowerTeam	C55C	5 Ton	5-1/4 in	5.25 in	481-1018
PowerTeam	C57C	5 Ton	6-3/4 in	7.25 in	481-1024
Enerpac	RSM-100	10 Ton	1 in	1.69 in	481-1030
Enerpac	RC-102	10 Ton	2-1/8 in	4.78 in	481-1036
Enerpac	RC-104	10 Ton	4-1/8 in	6.75 in	481-1040
Enerpac	RC-106	10 Ton	6-1/8 in	9.75 in	481-1042
Enerpac	RSM100	10 Ton	7/16 in	1.69 in	481-1030
Enerpac	RC-108	10 Ton	8 in	11.75 in	481-1048
Enerpac	RSM100	10 Ton	15/32 in	2-9/32 in	481-1028
Enerpac	RC256	25 Ton	6.25 in	10-3/4 in	481-1112
Enerpac	RCH-121	12 Ton	1.63 in	4.75 in	481-1066
Enerpac	RC156	15 Ton	6 in	10.69 in	481-1076
Enerpac	RSM-200	20 Ton	7/16 in Flat	2.03 in	481-1090
Enerpac	RSS202	20 Ton	1-3/4 in	2.47 in	481-1092
Enerpac	RC-252	25 Ton	2 in	6.5 in	481-1108

MAKE	MODEL	CAPACITY	STROKE	HEIGHT	CAT-CLASS
Enerpac	RC-254	25 Ton	4 in	6.5 in	481-1110
Enerpac	RC-256	25 Ton	6-1/4 in	10.25 in	481-1112
SPX	C256C	25 Ton	6-5/8 in	21 in	481-1112
Enerpac	RC-2514	25 Ton	14-1/4 in	18.75 in	481-1126
Enerpac	RSM-300	30 Ton	1/2 in	2.31 in	481-1132
Enerpac	RCH-306	30 Ton	6-1/8 in	13 in	481-1150
Enerpac	RC-504	50 Ton	3.94 in	8.94 in	481-1169
Enerpac	RSM-500	50 Ton	.63 in	2.63 in	481-1160
Enerpac	RCS-502	50 Ton	2-1/8 in	4.81 in	481-1162
Enerpac	RC-506	50 Ton	6-1/4 in	11.13 in	481-1170
PowerTeam	C556C	55 Ton	6 in	11.13 in	481-1186
Enerpac	RCS-1002	100 Ton	2 in	5.56 in	481-1242
Enerpac	RC-1002	100 Ton	2-1/8 in	5.56 in	481-1238
Enerpac	RC-1006	100 Ton	6-5/8 in	14.06 in	481-1254
Enerpac	RC-2510	25 Ton	10.25 in	14.75 in	481-1120
Enerpac	RC-2514	25 Ton	14.25 in	18.75 in	481-1126

CHAIN HOISTS

Designed to handle the most demanding lifting operations with a tough exterior shell and machined interior components.

Features include:

- All-steel construction for extreme durability
- Low headroom and lightweight design for ease of use
- Slip clutch prevents lifting damaging loads beyond rated capacity

UP TO 10 TON
LOAD CAPACITY



MAKE	MODEL	HEADROOM	DIAMETER	LOAD	CAT-CLASS
Harrington	CB005	11.2 in	5 in 1 in	1/2 Ton	480-2120
Harrington	CB010	12 in hook	6.3 in 1 in	1 Ton	480-2220
Harrington	CB015	18 in hook	7.1 in 1 in	1-1/2 Ton	480-2240
Harrington	CB020	24 in hook	8 in 1 in	2 Ton	480-2320
Harrington	CB030	Triple	7.1 in 2 in	3 Ton	480-2400
Harrington	CB050	23.6 in	9 in 2 in	5 Ton	480-2500
Harrington	CB05020	23.6 in	9 in 2 in	5 Ton	480-2540
Harrington	CB080	21.3 in	10 in 2 in	6 Ton	480-2580
Harrington	CB100	29.9 in	9 in 4 in	10 Ton	480-2620

PORTABLE CONVEYORS



Move soil, stone, aggregate, roofing material, brick, mortar and more faster and safer.

Features include:

- Two belt speeds
- 110V power supply
- Forward and reverse belt directions
- Internal waterproof motor
- Detachable hopper

UP TO 18 IN
BELT WIDTH



MAKE	MODEL	BELT LENGTH	BELT WIDTH	MOTOR	BELT CAPACITY	WEIGHT	CAT-CLASS
LINKIT	LKS300-3.2	10 ft	12 in	110V	330 lb	228 lb	480-2790
LINKIT	LKS450-3.2	10 ft	18 in	110V	440 lb	256 lb	480-2795

GLASS HANDLERS



Lift glass windows, curtain walls, or any airtight material including granite, marble, concrete, steel plates, fire doors and more.

UP TO 2,200 LB
LIFT CAPACITY



*Weight with Counterweight

MAKE	MODEL	POWER	LIFT CAPACITY	MAX EXTENSION / LIFT HEIGHT	MAX LOAD AT MAX EXTENSION	HYDRAULIC ROTATION / TILT FUNCTION	DIMENSIONS (LWH)	WEIGHT*	CAT-CLASS
Winlet	770	Electric	770 lb	3 ft 5 in / 9 ft 4 in	440 lb	360 degree / 140 degree	57 in / 27 in / 112 in	1,090 lb	340-1050
Winlet	1265	Electric	1,265 lb	5 ft 11 in / 11 ft 10 in	605 lb	180 degree / 180 degree	101.5 in / 35 in / 63 in	2,864 lb	340-1060
Winlet	1730	Electric	1,730 lb	8 ft 2 in / 12 ft 9 in	220 lb	180 degree / 180 degree	101 in / 35 in / 63 in	2,916 lb	340-1080
Winlet	2200	Electric	2,200 lb	8 ft 4 in / 13 ft 5 in	661 lb	180 degree / 180 degree	109 in / 35 in / 59 in	3968 lb	340-1090

CRAWLER CRANES



*Eco Clean options available

Versatile, flexible and strong, these mini-cranes are an essential tool for any commercial or large-scale indoor or outdoor job.

UP TO 8,920 LB
LOAD CAPACITY

SPYDERCRANE



Features include:

- Battery, gas-propane, diesel or diesel-battery powered
- 360-degree continuous rotation
- Audible warning system relays the state of operation the crane is in

MAKE	MODEL	LOAD CAPACITY	POWER	TIP HEIGHT	FOOTPRINT (EXTENDED)	DIMENSIONS (LWH)	WEIGHT	CAT-CLASS
SPYDERCRANE	URW094	1,990 lb	Battery	22 ft	10.5 ft / 10.5 ft	74 in / 23 in / 51 in	2,400 lb	350-1130
SPYDERCRANE	URW095	1,990 lb	Gas-propane	31 ft	12.5 ft / 12.5 ft	108 in / 24 in / 56 in	4,300 lb	350-1145
Jekko	SPX309 - Derated	1,950 lb	Electric	35 ft 9 in	12 ft / 12 ft	9 ft 5 in / 2 in / 5 ft 6 in	4,600 lb	350-1150
SPYDERCRANE	URW095	1,990 lb	Battery	31 ft	12.5 ft / 12.5 ft	108 in / 24 in / 56 in	4,300 lb	350-1150
SPYDERCRANE	URW295	6,450 lb	Battery	31 ft	12.5 ft / 12.5 ft	108 in / 24 in / 56 in	4,300 lb	350-1205
SPYDERCRANE	URW295	6,450 lb	Gas-propane	31 ft	12.5 ft / 12.5 ft	108 in / 24 in / 56 in	4,300 lb	350-1200
SPYDERCRANE	URW295	6,450 lb	Diesel	31 ft	12.5 ft / 12.5 ft	108 in / 24 in / 56 in	4,300 lb	350-1210
SPYDERCRANE	URW205	5,800 lb	Battery	31 ft	12.5 ft / 12.5 ft	108 in / 21 in / 55 in	4360 lb	350-1186
SPYDERCRANE	URW306	5,800 lb	Battery	52 ft	15 ft / 14.5 ft	171 in / 51 in / 71 in	8,760 lb	350-1225
SPYDERCRANE	URW506	5,800 lb	Diesel	54 ft	19.5 ft / 19.5 ft	54 in / 78 in / 195 in	11,000 lb	350-1270
SPYDERCRANE	URW376	6,680 lb	Diesel-battery	52 ft	15 ft / 14.5 ft	171 in / 71 in / 51 in	8,900 lb	350-1240
SPYDERCRANE	URW376T	6,680 lb	Diesel-battery	52 ft	15 ft / 14.5 ft	171 in / 71 in / 51 in	8,900 lb	350-1265
SPYDERCRANE	URW547	8,920 lb	Diesel-battery	68 ft	19.5 ft / 19.5 ft	195 in / 78 in / 54 in	11,000 lb	350-1285

CRAWLER CRANE ATTACHMENTS



AUXILIARY WINCH



GLASS MANIPULATOR

MAKE	TYPE	DESCRIPTION	CAT-CLASS
SPYDERCRANE	Auxiliary Winch	300 ft of usable wire	350-1410
SPYDERCRANE	Glass Manipulator	1,300 lb lift capacity	350-1400
Jekko	Glass Manipulator-Quadra Tilt	1,400 lb lift capacity	350-1360

PICK AND CARRY CRANES



Compact, self-propelled cranes designed to lift, shift and place loads without the need for outriggers, which means the crane can move while handling the load. Suitable for work in warehouses or spaces where access is difficult for other cranes and where handling of heavy loads through doors is required.

Features include:

- Battery Powered
- Radio Remote Controlled
- Compact Footprint
- No outriggers

UP TO 11,000 LB
LOAD CAPACITY

UP TO 30 FT
LIFT HEIGHT



MAKE	MODEL	FUEL TYPE	LOAD CAPACITY	LIFT HEIGHT	DIMENSIONS (LWH)	WEIGHT	CAT-CLASS
Jekko	MPK10	Electric	1,950 lb	16 ft	8 ft 8 in / 3 ft 1 in / 6 ft 4 in	4,400 lb	350-3225
Jekko	MPK20	Electric	4,400 lb hook 3,960 lb winch	16 ft	8 ft 8 in / 3 ft 1 in / 6 ft 4 in	4,400 lb	350-3220
Jekko	MPK50W+	Electric	11,000 lb	30 ft 2 in	9 ft 10 in / 3 ft 11 in / 5 ft 8 in	10,000 lb	350-3230

CARRY DECK CRANES

Ideal for lifting materials that require a compact low-profile crane that can clear overhead obstacles and maneuver in tight spaces.

Features include:

- 3-section boom with 90-degree rotation or 360-degree continuous boom rotation
- Two-wheel, four-wheel or crab steering
- Available features include all-weather cab, a/c, 4WD, boom work lights and more

UP TO 15 TON
LOAD CAPACITY

UP TO 50 FT
LIFT HEIGHT



MAKE	MODEL	FUEL TYPE	LOAD CAPACITY	CAPACITY ON OUTRIGGERS	CAPACITY W/OUT OUTRIGGERS	LIFT HEIGHT	DIMENSIONS (LWH)	WEIGHT	CAT-CLASS
Broderson	IC-20-1J	Diesel	2.5 Ton	5,000 lb	2,500 lb	15 ft	22 ft / 4 ft / 7 ft 6 in	6,380 lb	350-2000
Broderson	IC-20-1J	Dual fuel	2.5 Ton	5,000 lb	2,500 lb	15 ft	22 ft / 4 ft / 7 ft 6 in	6,380 lb	350-2010
Broderson	IC-35-2F	Diesel	4 Ton	8,000 lb	6,700 lb	19 ft	27 ft / 5 ft / 6 ft 6 in	7,860 lb	350-2030
Broderson	IC-35-2F	Dual fuel	4 Ton	8,000 lb	6,700 lb	19 ft	27 ft / 5 ft / 6 ft 6 in	7,860 lb	350-2040
Broderson	IC-80-3J	Diesel	8 Ton	18,000 lb	11,700 lb	30 ft	40 ft / 6 ft 6 in / 7 ft 3 in	16,750 lb	350-2060
Broderson	IC-80-3J	Dual fuel	8 Ton	18,000 lb	11,700 lb	30 ft	40 ft / 6 ft 6 in / 7 ft 3 in	16,750 lb	350-2070
Broderson	IC-200-3J	Diesel	15 Ton	30,000 lb	17,000 lb	50 ft	40 ft / 6 ft / 7 ft 11 in	31,080 lb	350-2090
Broderson	IC-200-3J	Dual fuel	15 Ton	30,000 lb	17,000 lb	50 ft	66 ft / 7 ft 10.5 in / 7 ft 11 in	31,080 lb	350-2100
Broderson	IC-250-3E	Diesel	18 Ton	36,000 lb	18,500 lb	50 ft	70 ft / 7- 10.5 in / 7 ft 11 in	37,700 lb	350-2100
Broderson	IC-250-3E	Dual fuel	18 Ton	36,000 lb	18,500 lb	50 ft	70 ft / 7- 10.5 in / 7 ft 11 in	37,700 lb	350-2115


ProControlTM

NextGen



Herc Rentals' live delivery and pick-up tracking.

Increase security and know exactly when your rented equipment will arrive or leave your job site.

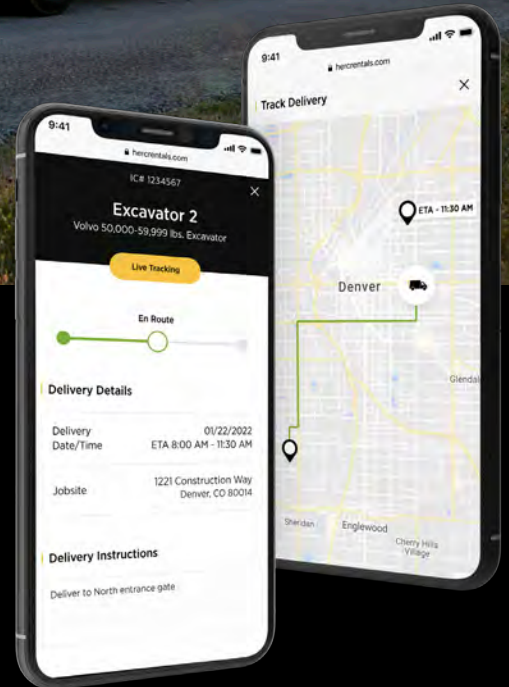

- Plan your workday based on when equipment will arrive
- Grant access to job sites at specified times to maintain security



Learn more at [HercRentals.com](https://www.HercRentals.com)

HercRentals[®]



PUMP AND POWER



Pumps

- Contractor Pumps
- Diaphragm Pumps
- Electric Sewage Submersible Pumps
- Electric Dewatering Submersible Pumps
- Air-Operated Double Diaphragm
- High-Volume Diesel Pumps
- Sound-Attenuated Diesel Pumps
- High-Head Diesel Pumps
- Electric Pumps
- Speciality Diesel Pumps
- Hydraulic Pumps
- Well Point Pumps

Generators

- Portable Generators
- Towable Generators
- Skid-Mounted Generators
- Load Banks
- Containment Berms
- Noise Reduction Panels
- Fuel Tanks

CONTRACTOR PUMPS

These trash pumps dewater job sites fast and are capable of passing water containing debris, other solids or materials.

Features include:

- Self-priming
- Radial flow design
- Automatic low oil shutdown

UP TO 569 GPM
MAX FLOW



MAKE	MODEL	SUCTION X DISCHARGE	MAX FLOW	MAX HEAD	FUEL CAPACITY	RUN TIME	DIMENSIONS (LWH)	WEIGHT	CAT CLASS
Tsurumi	TE3-50HA	2 x 2 in	137 gpm	105 ft	0.66 gal	3 hr	18.5 in / 14.6 in / 17.1 in	55 lb	800-1020
Tsurumi	TE3-80HA	3 x 3 in	264 gpm	105 ft	0.95 gal	3.3 hr	20.5 in / 16.5 in / 18.1 in	64 lb	800-1030
Tsurumi	EPT3-50HA	2 x 2 in	185 gpm	92 ft	0.95 gal	3.3 hr	23.3 in / 18.3 in / 17.4 in	82 lb	800-1080
Tsurumi	EPT3-80HA	3 x 3 in	357 gpm	92 ft	1.6 gal	3.2 hr	27.5 in / 20.1 in / 25.6 in	136 lb	800-1090
Tsurumi	EPT3-100HA	4 x 4 in	569 gpm	95 ft	1.7 gal	2.6 hr	30.1 in / 20.1 in / 26 in	160 lb	800-1110

DIAPHRAGM PUMPS

Uses two sets of flexible membranes to pump fluids and a series of check valves to ensure fluid can only travel in one direction through the chamber.

Features include:

- Motor design delivers optimum air efficiency
- Can handle solids, and run dry without damage

88 GPM
MAX FLOW



MAKE	MODEL	SUCTION X DISCHARGE	MAX FLOW	MAX HEAD	FUEL / CAPACITY	RUN TIME	DIMENSIONS (LWH)	WEIGHT	CAT CLASS
Wacker Neuson	PDT3A	3 x 3 in	88 gpm	25 ft	Gasoline / 2.6 gal	2.2 hrs	33 in / 32 in / 31.5 in	140 lb	800-1130

ELECTRIC SEWAGE SUBMERSIBLE PUMPS



Designed to safely handle solids-laden wastewater in dewatering, effluent waste handling, onsite wastewater treatment, municipal sewer systems and septic system pumping applications.

Features include:

- Side discharge
- Single or 3-phase power
- Mechanical seals
- 50-foot power cord

UP TO 1,980 GPM
MAX FLOW



MAKE	MODEL	DESCRIPTION	MAX FLOW	MAX HEAD	CAT CLASS
Tsurumi	80C211	3 in Electric submersible sewage 15 hp	305 gpm	165 ft	809-1940
Tsurumi	MQB100B 18.5/6AW 334	4 in Electric submersible sewage 25 hp	1,550 gpm	37 ft	809-2100
Tsurumi	MQB150B 37/6AW 405	6 in Electric submersible sewage 50 hp	1,980 gpm	76 ft	809-2180

HOSES AND PIPING

- Pump accessories

TYPE	SIZE
Suction Hose	2 in - 12 in
Layflat Discharge Hose	2 in - 8 in
Chemical Hose	2 in - 8 in
Stainless Steel Hose	3/4 in - 12 in

TYPE	SIZE
Flanged Dock Hose	4 in - 14 in
Fusible HDPE	4 in, 12 in, 18 in
Quick Disconnect Galvanized Pipe	4 in, 6 in, 8 in, 12 in
Victaulic Aluminum Pipe	8 in, 12 in

ELECTRIC DEWATERING SUBMERSIBLE PUMPS



Designed to remove clean or lightly contaminated water from flooded basements, sumps, rooftops and construction and dump sites.

Features include:

- Compact and lightweight
- No suction lift limitations
- Top discharge design
- Extended run dry capabilities

UP TO 5,500 GPM
MAX FLOW



MAKE	MODEL	DESCRIPTION	MAX FLOW	MAX HEAD	CAT CLASS
Tsurumi	LB480	2 in Electric Submersible	62 gpm	39 ft	809-1860
Tsurumi	LBT-800	2 in Electric Submersible HV 1 hp 3PH	82 gpm	59 ft	809-1900
Tsurumi	LH23.7-61(460V)	2 in Electric Submersible HHead 4 hp 3PH	119 gpm	119 ft	809-1930
Tsurumi	NK2-15	3 in Electric Submersible	110 gpm	69 ft	809-1880
Tsurumi	LH25.5W	3 in Electric Submersible HHead 6 hp	129 gpm	213 ft	809-1980
Tsurumi	KTV2-37	3 in Electric Submersible HV 5 hp 3PH	217 gpm	94 ft	809-2020
Tsurumi	KTZ411	4 in Electric Submersible HHead 15 hp	378 gpm	167 ft	809-2060
Tsurumi	KTZ45.5	4 in Electric Submersible	425 gpm	79 ft	809-2120
Tsurumi	KRS2-8S	6 in Electric Submersible HV 15 hp 3PH	1,453 gpm	59 ft	809-2190
Tsurumi	KRS815	6 in Electric Submersible HV 20 hp 3PH	1,664 gpm	75 ft	809-2200
Tsurumi	GPN622-61	6 in Electric Submersible	1,368 gpm	94 ft	809-2220
Tsurumi	KRS822	8 in Electric Submersible HV 3PH	1,400 gpm	112 ft	809-2230
Sulzer	J604	10 in Electric Submersible	5,500 gpm	190 ft	809-2240

AIR-OPERATED DOUBLE DIAPHRAGM PUMPS

Pump thick liquids, slurries, moderately abrasive fluids and suspended solids easily and efficiently.

Features include:

- Low maintenance
- Stainless steel, polypropylene and aluminum options
- Buna, Viton, and Teflon Elastomer options

UP TO 280 GPM
MAX FLOW



MAKE	MODEL	DESCRIPTION	MAX FLOW	CAT-CLASS
Versa-Matic	E1PP5T5T9C	AODD 1 in E-series polypropylene	36 gpm	812-2360
Versa-Matic	E1AA2R229C-ATEX	AODD 1 in E-series aluminum	49 gpm	812-2370
Versa-Matic	E2PA5T5T9C	AODD 2 in E-series polypropylene	145 gpm	812-2390
Versa-Matic	E2SA3R330C-ATEX	AODD 2 in E-series clamped stainless	185 gpm	812-2400
Versa-Matic	E2AA2R220C-ATEX	AODD 2 in E-series clamped aluminum	185 gpm	812-2410
Versa-Matic	E3PP5T559A	AODD 3 in E-series polypropylene	280 gpm	812-2430
Versa-Matic	E3SA3R339C-ATEX	AODD 3 in E-series bolted stainless	273 gpm	812-2440
Versa-Matic	E3AA2R220C-ATEX	AODD 3 in E-series clamped aluminum	234 gpm	812-2450

HIGH-VOLUME DIESEL PUMPS

Also known as solids handling pumps, these pumps are efficient, durable and designed to handle the most difficult solids applications.

Features include:

- Continuous auto-priming
- Run dry capabilities
- Solids handling
- Suction lifts up to 28 feet

UP TO 19,000 GPM
MAX FLOW



MAKE	MODEL	DESCRIPTION	MAX FLOW	MAX HEAD	SOLIDS HANDLING	MAX FUEL CONS @ 1,800 RPM	CAT-CLASS
Pioneer	PP44S10L71-D2.9L4	4 in Pump vac assist T4F DSL	1,520 gpm (345 m ³ /h)	155 ft	3 in	2.07 gph (7.83 L/h)	801-1220
Pioneer	PP66S12L71-TD2.9L4	6 in Pump vac assist DSL	2,840 gpm (645 m ³ /h)	182 ft	3 in	3.07 gph (11.62 L/h)	801-1230
Pioneer	PP66S14L71-4045HFC06	6 in Pump vac assist SUPER DSL	3,050 gpm (693 m ³ /h)	223 ft	3 in	7.03 gph (26.6 L/hr)	801-1250
Pioneer	PP88S12L71-TCD3.6L4	8 in Pump vac assist SUPER DSL	4,280 gpm (972 m ³ /h)	193 ft	3 in	5.48 gph (20.7 L/hr)	801-1280
Pioneer	PP121S17L71-6068CI550	12 in Pump vac assist DSL	9,750 gpm (2,214 m ³ /h)	205 ft	3.6 in	11.72 gph (44.4 L/h)	801-1290
Pioneer	PP121S17L71-6090CI550	12 in Pump vac assist SUPER DSL	10,600 gpm (2,408 m ³ /h)	298 ft	3.6 in	15.69 gph (59.39 L/h)	801-1300
Pioneer	PP141S17L71-6090CI550	14 in Pump vac assist DSL	12,900 gpm (2,930 m ³ /h)	186 ft	4 in	15.69 gph (59.39 L/h)	801-1320
Pioneer	PP181S22L71-6135HFC09	18 in Pump vac assist DSL	19,000 gpm (4,315 m ³ /h)	195 ft	4.5 in	25.3 gph (95.8 L/h)	801-1330

SOUND-ATTENUATED DIESEL PUMPS



Sound level
70 DBA @ 30 ft

Designed for sewer bypass projects in residential areas and other areas that have noise restrictions, such as hospitals, nursing homes and commercial areas.

Features include:

- 14-gauge solid steel outer shell
- Hinged, lockable swinging doors for easy access
- Auto-start capabilities


UP TO 12,900 GPM
MAX FLOW



MAKE	MODEL	DESCRIPTION	MAX FLOW	MAX HEAD	SOLIDS HANDLING	MAX FUEL CONS @ 1,800 RPM	CAT-CLASS
Pioneer	SAPP44S10L71-D2.9L4	4 in Pump vac assist	1,470 gpm (334 m ³ /h)	114 ft	3 in	2.04 gph (7.7 L/hr)	802-1340
Pioneer	SAPP66S12L71-TD2.9L4-UP	6 in Pump vac assist	2,720 gpm (618 m ³ /h)	128 ft	3 in	3.07 gph (11.6 L/hr)	802-1350
Pioneer	SAPP88S12L71-TCD3.6L4	8 in Pump vac assist	4,280 gpm (972 m ³ /h)	193 ft	3 in	5.48 gph (20.7 L/hr)	802-1360
Pioneer	SAPPI21S17L71-6068CI550	12 in Pump vac assist	9,750 gpm (2,214 m ³ /h)	205 ft	3.6 in	11.72 gph (44.4 L/h)	802-1370
Pioneer	SAPPI41S17L71-6090CI550	14 in Pump vac assist	12,900 gpm (2,930 m ³ /h)	203 ft	4 in	15.69 gph (59.39 L/h)	802-1380

ROAD CROSSINGS

- Four lifting rings
- Angled approach ramps
- Constructed from 1/4 in steel wall material



MAKE	MODEL	DESCRIPTION	CAT-CLASS
Brahman	4 in Flange x 12 in	4 in Brahman Board	820-2825
Brahman	6 in Flange x 12 in	6 in Brahman Board	820-2900
Dragon	8 in Flange x 12 in	8 in Road Crossing Single Wide	820-2880
Dragon	12 in Flange x 12 in	12 in Road Crossing Single Wide	820-2870
Dragon	12 in Flange x 24 in	12 in Road Crossing Double Wide	820-2890

HIGH HEAD DIESEL PUMPS

Designed to efficiently and effectively handle a variety of liquids and offer a higher head rating than most trash pumps.

Features include:

- 24-hour running fuel capacity — most models
- Produce enough pressure to eliminate need for series pumping
- Safety shutdown switches

UP TO 10,600 GPM
MAX FLOW



MAKE	MODEL	DESCRIPTION	MAX FLOW	MAX HEAD	SOLIDS HANDLING	MAX FUEL CONS @ 1,800 RPM	CAT-CLASS
Pioneer	PP43C21L71-4045HFC06	4x3 in Pump vac assist high head	600 gpm (136 m ³ /h)	678 ft	0.75 in	7.03 gph (26.6 L/hr)	804-1455
Pioneer	PP53C14L71-TD2.9L4	5x3 in Pump vac assist high head	775 gpm (176 m ³ /h)	232 ft	0.75 in	3.07 gph (11.6 L/hr)	804-1460
Pioneer	PP63C17L71-4045HFC06	6x3 in Pump vac assist high head	1120 gpm (254 m ³ /h)	342 ft	0.75 in	7.03 gph (26.6 L/hr)	804-1470
Pioneer	PP64S17L71-6068CI550	6x4 in Pump vac assist high head	2,820 gpm (640 m ³ /h)	470 ft	3 in	11.7 gph (44.29 L/h)	804-1480
Pioneer	PP86S17L71-6068CI550	8x6 in Pump vac assist high head	4,700 gpm (1,067 m ³ /h)	432 ft	3 in	11.72 gph (44.4 L/h)	804-1520
Pioneer	PP108S17L71-6090CI550	10x8 in Pump vac assist high head	7,000 gpm (1,590 m ³ /h)	380 ft	3.5 in	15.69 gph (59.39 L/h)	804-1540
Pioneer	PP128S20L71-6135HFC09	12x8 in Pump vac assist high head	8,450 gpm (1,919 m ³ /h)	422 ft	3 in	25.3 gph (95.8 L/h)	804-1545
Pioneer	PP86C21L71-6135HFC09	8x6 in Pump vac assist head 600 hp	4,000 gpm (908 m ³ /h)	650 ft	1.5 in	25.35 gph (95.9 L/hr)	804-1590
Pioneer	PP1212S17L71-6090CI550	12 in Pump vac assist	10,600 gpm (2,408 m ³ /h)	298 ft	3.6 in	15.69 gph (59.39 L/h)	801-1300

ELECTRIC PUMPS



These pumps run clean and quiet and are ideal for dewatering construction and industrial applications where diesel engines are prohibited or impractical.

Features include:

- Environmental-permit exempt
- Minimizes emission footprint
- Available options include: high volume, high head, soft start, and VFD

UP TO 4,750 GPM
MAX FLOW



MAKE	MODEL	DESCRIPTION	MAX FLOW	MAX HEAD	SOLIDS HANDLING	CAT-CLASS
Pioneer	PP44S10L71-HO-40-4 w/VFD	4 in Pump vac assist	1,500 gpm (340 m ³ /h)	115 ft	3 in	808-1750
Pioneer	PP63C17L71-HO-150-4 w/VFD	6X3 in Pump vac assist high head	2,800 gpm (636 m ³ /h)	156 ft	3 in	808-1800
Pioneer	PP66S12L71-HO-60-4 w/VFD	6 in Pump vac assist	2,720 gpm (618 m ³ /h)	128 ft	3 in	808-1770
Pioneer	PP88S12L71-HO-125-4 w/VFD	8 in Pump vac assist	4,750 gpm (1,079 m ³ /h)	193 ft	3 in	808-1780

CONTAINMENT BERMS

- Sidewalls are folded up/down, creating a containment system for leaks and spills of oil, fuel, chemicals and other environmentally harmful chemicals.



MAKE	MODEL	SIZE	CAT-CLASS
PACTEC	PT8812	8 in x 8 in	913-1024
PACTEC	PT101012	10 in x 10 in	913-1039
PACTEC	PT121212	12 in x 12 in	913-1051
PACTEC	PT122512	12 in x 25 in	913-1060

SPECIALITY DIESEL PUMPS

Designed to efficiently and effectively handle a variety of liquids and offer a higher head rating than most trash pumps.

Features include:

- 24-hour running fuel capacity
- Produce enough pressure to eliminate need for series pumping
- Safety shutdown switches

UP TO 7,300 GPM
MAX FLOW



MAKE	MODEL	DESCRIPTION	MAX FLOW	MAX HEAD	SOLIDS HANDLING	MAX FUEL CONS @ 1,800 RPM	CAT-CLASS
Pioneer	PP44S10L2-D2.9L4	4 in Pump vac assist SS	1,470 gpm (334 m ³ /h)	114 ft	3 in	2.04 gph (7.7 L/hr)	803-1400
Pioneer	PP66S12L2-TD2.9L4-GL	6 in Pump vac assist SS	2,840 gpm (645 m ³ /h)	182 ft	3 in	3.07 gph (11.62 L/h)	803-1410
Pioneer	PP66S14L2-4045HFC06	6 in Super Pump vac assist SS	3,170 gpm (720 m ³ /h)	275 ft	3 in	7.03 gph (26.6 L/hr)	803-1430
Pioneer	PP63C17L2-4045HFC06	6X3 in Pump vac assist SS high head	1,120 gpm (254 m ³ /h)	342 ft	0.75 in	7.03 gph (26.6 L/hr)	804-1560
Pioneer	PP88S12L2-TCDD3.6L4	8 in Super Pump vac assist SS	4,280 gpm (972 m ³ /h)	193 ft	3 in	5.48 gph (20.7 L/hr)	803-1440
Pioneer	PP108S17L2-6090CI550	10X8 in Pump vac assist SS high head	7,300 gpm (1,658 m ³ /h)	326 ft	3.5 in	15.69 gph (59.39 L/h)	804-1570

HYDRAULIC PUMPS

Designed for dewatering mines, quarries and other high suction lift applications.

Features include:

- Residential muffler
- Automatic oil pressure/temperature safety shut down
- Submersible pump head options

UP TO 5,750 GPM
MAX FLOW

MAKE	MODEL	DESCRIPTION	MAX FLOW	SOLIDS HANDLING	MAX FUEL CONS	CAT-CLASS
D&D	4SSS44	4 in Stainless steel sludge pumphead - 44 gpm	900 gpm @ 20 in TDH	3 in	N/A	811-2270
D&D	4S44	4 in Sludge pumphead - 44 gpm	900 gpm @ 20 in TDH	3 in	N/A	811-2280
D&D	6S44	6 in Sludge pumphead - 44 gpm	2,150 gpm @ 20 in TDH	3 in	N/A	811-2310
D&D	8T44	8 in Trash pumphead - 44 gpm	2,750 gpm @ 20 in TDH	3 in	N/A	811-2320
D&D	12T96	12 in Trash pumphead - 96 gpm	5,750 gpm @ 20 in TDH	4 in	N/A	811-2340
D&D	400DTR	65 hp John Deere, 400D Power unit, trailer-mounted	N/A	N/A	2.8 gal/hr	814-2633
D&D	800DTR	200 hp John Deere, 800D Power unit, trailer-mounted	N/A	N/A	7.3 gal/hr	814-2640

WELL POINT PUMPS

Designed to handle large volumes of water and air.

Features include:

- High-efficiency performance
- Diesel and electric options
- Integral fuel tank designed for 24-hour operation

UP TO 2,200 GPM
MAX FLOW



MAKE	MODEL	DESCRIPTION	MAX FLOW	AIR MOVING CAPACITY	MAX FUEL CONS	CAT-CLASS
Thompson	6PW-DHS-ID90E-SK	6 in Piston Pump (Enclosed)	400 gpm	53 cfm	0.4 gph	806-1650
Thompson	8RW-DDS-3.6-X	8 in Rotary Wellpoint Pump (Open)	1,750 gpm	275 cfm	4.48 gph	806-1675
Thompson	8RW-DDS-3.6-XC	8 in Rotary Wellpoint Pump (Enclosed)	1,750 gpm	275 cfm	4.48 gph	806-1680
Thompson	12R-DDS-3.6-X	12 in Rotary Wellpoint Pump (Open)	2,200 gpm	400 cfm	4.48 gph	806-1690


Power Solutions

Delivering power to a construction site, special event or a variety of any industrial site or facility requires careful planning and consideration. Our power experts will walk your job with you to gain understanding of all of your power needs. We'll specify the most efficient and economical power solution to ensure your mission-critical power needs are met.



Generators ranging from:

20kW TO 1,000kW

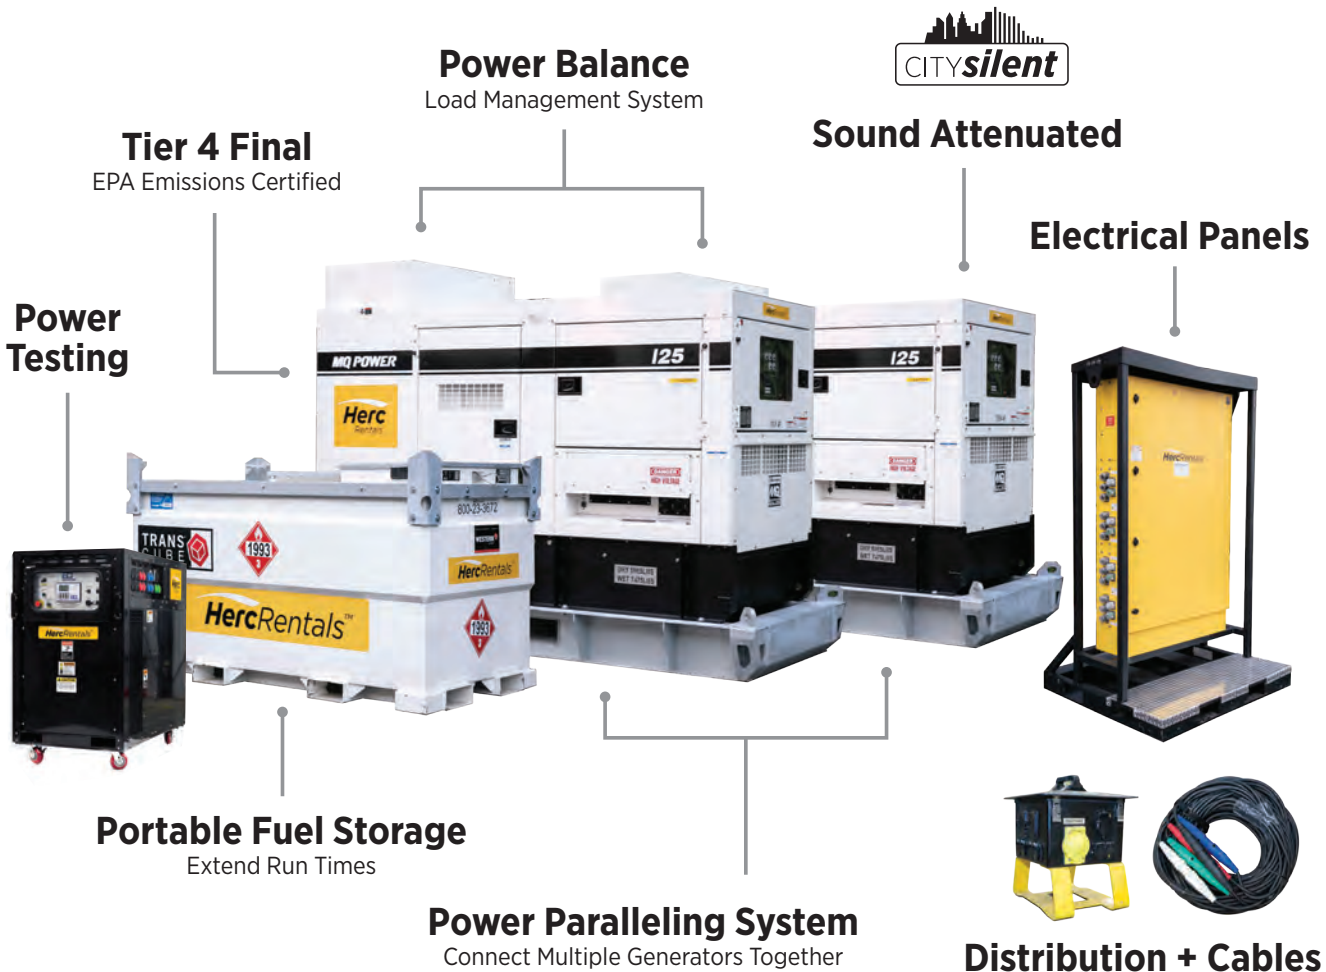

PORTABLE GENERATORS

These compact but powerful generators can be used to power tools and equipment at job sites, outdoor events, offices and residences.

Features include:

- Heavy duty frames
- 2-7 outlets
- Reduced noise level
- Electronic ignition

UP TO 8 HR
RUN TIME

2-14 KW



MAKE	MODEL	TYPE	RATED WATTS	SURGE WATTS	VOLTAGE/AMPS	FUEL CAPACITY	RUN TIME	WEIGHT	CAT CLASS
Honda	EU2200iTA1	Inverter generator	1,600	2,000	120V SS / 16.7A	0.9 gal	4.0 hr	46 lb	500-1025
Briggs-Stratton	BGP2400	Inverter	1,800	2,400	(2) 120V/20A	1 gal	8 hr	50.4 lb	500-1025
Honda	EB3000CK2A	Portable generator	2,600	3,000	120V / 25A	2.6 gal	6.1 hr	71 lb	500-1030
Honda	EU3000iS1A	Inverter generator	2,800	3,000	120V / 25A	3.4 gal	7.2 hr	134 lb	500-1035
Briggs-Stratton	BGP4500	Inverter	3,700	4,500	(4) 120V/20A / (1) 120V/30A	3.5 gal	16 hr	104 lb	500-1045
Honda	EB5000XK3	Portable generator	4,001	6,000	120-240V	6.2 gal	8.1 hr	214 lb	500-1050
Honda	EU7000iAT1	Inverter generator	5,500	7,000	120-240V / 58.3-29.1A	5.1 gal	6.5 hr	262 lb	500-1075
Briggs-Stratton	BGP6500	Inverter	5,000	6,500	(4) 120V/20A / (1) 240V/30A	5 gal	14 hr	128 lb	500-1075
Honda	EB10000	Portable generator	9,000	10,000	120-240V / 83.8-41.6A	8.1 gal	5.3 hr	403 lb	500-1100
Mi-T-M	GEN-14000-1MHE	Portable generator	12,000	14,000	120-240V / 116.7-58.3A	13.2 gal	8.0 hr	508 lb	500-1110

TOWABLE GENERATORS

Designed to provide long-lasting, reliable power to meet the most demanding requirements and built to withstand tough environments.

Features include:

- Auto start/stop allows generator to start from a remote location
- Weatherproof steel housing decreases noise level to 65 dB(A).
- Fuel tank capacity allows for lengthy, continuous run time

UP TO 33 HR
RUN TIME

20-1,000 KW



MODEL	TIER	KW PRIME (STANDBY)	STYLE	DIMENSIONS (LWH)	DRY WEIGHT	WET WEIGHT	TOTAL FUEL CAPACITY	FUEL CONSUMPTION (FULL LOAD)	RUN TIME	CAT CLASS
DCA25SSIU4F	4F	20 (22)	Trailer	105 in / 57 in / 62 in	2,365 lb	2,705 lb	42 gal	1.62 gph	25 hr	501-1020
DCA45SSIU4F	4F	36 (40)	Trailer	148 in / 66 in / 77 in	3,395 lb	4,035 lb	79 gal	2.93 gph	27 hr	501-1040
DCA70SSJU4i	4i	56 (62)	Trailer	166 in / 72 in / 85 in	4,683 lb	5,414 lb	103 gal	4.30 gph	23 hr	501-1055
DCA70SSIU4F	4F	56 (62)	Trailer	166 in / 72 in / 85 in	4,420 lb	5,300 lb	103 gal	4.40 gph	23 hr	501-1055
DCA125SSJU4i	4i	100 (110)	Trailer	182 in / 80 in / 90 in	6,856 lb	8,049 lb	168 gal	7.30 gph	23 hr	501-1100
DCA125SSIU4F	4F	100 (110)	Trailer	181 in / 79 in / 120 in	7,010 lb	8,210 lb	169 gal	7.11 gph	23 hr	501-1100
DCA150SSJU4F	4F	120 (132)	Trailer	209 in / 85 in / 96 in	9,195 lb	11,176 lb	279 gal	8.40 gph	33 hr	501-1120
DCA220SSJU4F	4F	176 (194)	Trailer	210 in / 88 in / 99 in	10,456 lb	13,076 lb	369 gal	12.50 gph	29 hr	501-1175
DCA300SSJU4F	4F	240 (264)	Trailer	223 in / 95 in / 106 in	13,418 lb	16,258 lb	400 gal	17.20 gph	23 hr	501-1250
DCA300SSJU4F2	4F	240 (264)	Trailer	224 in / 100 in / 120 in	14,296 lb	17,353 lb	431 gal	16.70 gph	25 hr	501-1250
DCA400SSI4F	4F	320 (336)	Trailer	265 in / 94 in / 111 in	16,560 lb	19,439 lb	406 gal	22.50 gph	18 hr	501-1320
C500D6RG	TIER 2	455 (500)	Trailer	239 in / 96 in / 148 in	29,440 lb	35,380 lb	849 gal	30.4 gph	27 hr	501-1500
C500D6RE	4F	500 (550)	Trailer	360 in / 96 in / 163 in	26,920 lb	34,786 lb	1,000 gal	34 gph	29 hr	501-1510
C1000D6RE	TIER 4	500 (550)	Trailer	286.92 in / 102 in / 123 ft	22,440 lb	26,250 lb	547 gal	23.5 gph	23 hr	501-1510
C1000D6RG	TIER 2	900 (1000)	Trailer	359 in / 96 in / 160 ft	41,280 lb	53,378 lb	1,704 gal	63.9 gph	26 hr	501-2100

SKID-MOUNTED GENERATORS

Skid mounted designed to reduce the job site foot print, reliable power to meet the most demanding requirements and built to withstand tough environments.

Features include:

- Auto start/stop allows generator to start from a remote location
- Weatherproof steel housing decreases noise level to 65 dB(A).
- External fuel connection allows for lengthy, continuous run time

UP TO 25 HR
RUN TIME

100-325 KW



MODEL	TIER	KW PRIME (STANDBY)	STYLE	DIMENSIONS (LWH)	DRY WEIGHT	WET WEIGHT	TOTAL FUEL CAPACITY	FUEL CONSUMPTION (FULL LOAD)	RUN TIME	CAT CLASS
DCA125SSIU4F	4F	100 (110)	Skid	138 in / 56 in / 96 in	6,065 lb	7,475 lb	169 gal	7.11 gph	23 hr	501-1105
DCA220SSJU4F	4F	176 (194)	Skid	153 in / 59 in / 96 in	8,570 lb	9,365 lb	69 gal	12.50 gph	5 hr	501-1180
DCA300SSJU4F	4F	240 (264)	Skid	167 in / 67 in / 86 in	12,335 lb	13,045 lb	100 gal	17.20 gph	5 hr	501-1255
DCA300SSJU4F2	4F	240 (264)	Skid	167 in / 67 in / 108 in	12,335 lb	16,125 lb	431 gal	16.70 gph	25 hr	501-1255
DCA400SSI4F	4F	320 (336)	Skid	193 in / 67 in / 106 in	13,450 lb	14,355 lb	56 gal	22.50 gph	2 hr	501-1325

LOAD BANKS



Can prevent a loss of power resulting in productions delays and rising costs during an emergency or disaster.

125-3,000 KW

Features include:

- Portable built to fit through any industrial door
- Quick-Connect, color-coded Cam-Lok power connectors
- Control Power Emergency-Stop (E-STOP) push button is provided to disable control power voltage to all operator control power circuits
- Backlit LCD offers superior viewing for both bright and dim light conditions



MAKE	MODEL	RATING	DIMENSIONS	WEIGHT	CAT-CLASS
Load Banks Direct	LP125-240-480-IDM-CB-CASE	125 KW @ 480V 3PH 150A per phase 125 KW @ 240V 3PH 301A per phase	18 in / 28 in / 38 in Case: 22 in / 32 in / 50 in	Load Bank 140 lb Travel Case 76 lb	525-1362
Load Banks Direct	LP600H-240-480-IDMT-CB + Cage	600 KW @ 480V 3PH 722A per phase 600 KW @ 240V 3PH 1443A per phase	34 in / 58 in / 60 in Cage: 43 in / 66 in / 73 in	Load Bank 1,300 lb Shipping Cage 445 lb	525-1364
Load Banks Direct	LP1000-480-IDMT-CB + Cage	1,000 KW @ 480V 3PH 1202A per phase	34 in / 50 in / 77 in Cage: 43 in / 57 in / 89 in	Load Bank 1,300 lb Shipping Cage 412 lb	525-1366
Load Banks Direct	LT3000-480-IDMT-CB + Trailer	3,000 KW @ 480V 3PH 6308A per phase 750 KW @ 240V 3PH 1804A per phase	113 in / 48 in / 98 in	5,000 lb	525-1368

GENERATOR PERFORMANCE CHART

MODEL	PRIME POWER OUTPUT RATING		AMPS AT 3-PHASE 0.8 PF		AMPS AT 1-PHASE 1.0 PF				MAIN LINE CB RATING AMPS	OCR TRIP SET AMPS	MSKVA @ 30% VDIP
					4-WIRE		240/120V ZIG ZAG				
					120V	240V	120V	240V			
DCA25SSIU4F	25	20	60	30	56 x 3	28 x 3	60 x 2	60	60	30	65
DCA45SSIU4F	45	36	108	54	100 x 3	50 x 3	108 x 2	108	125	54	100
DCA70SSIU4F	70	56	168	84	155 x 3	78 x 3	168 x 2	168	175	84	170
DCA125SSIU4F	125	100	300	150	278 x 3	139 x 3	301 x 2	301	300	152	410
DCA150SSJU4F	150	120	361	180	333 x 3	167 x 3	361 x 2	361	400	180	500
DCA220SSJU4F	220	176	529	265	488 x 3	244 x 3			600	265	700
DCA300SSJU4F	300	240	722	361	666 x 6	333 x 3			800	361	800
DCA400SSI4F	400	320	962	481	888 x 3	444 x 3			1,000	481	1,000
C500D6RG	600	500	1908	827					2,000	827	2,000

SAFE AND SOUND KITS



*Eco Clean options available

Reduce work site noise pollution by up to 97%, increase job site security, and protect from costly drips and spills all in one easy to create package.

STEP ONE



X-Guard containment berm

STEP TWO



Fence and crash barrier

STEP THREE



Noise reduction panels

MAKE	MODEL	DESCRIPTION	DIMENSIONS (LWH)	CAT CLASS
Traffix Devices	45332	Water-cable crash barrier (TL-1 + TL-2 rated)	6 ft / 1.5 ft / 3.2 ft	913-3766
Traffix Devices	45032-WWF	Chain link fence section for crash barrier	6 ft / 2 in / 4 ft	913-3780
Traffix Devices	45032-WWFG-C	Chain link gate kit for crash barrier	6 ft / 2 in / 6 ft	913-3782
Justrite	26460H	Noise reduction panel	4.3 ft / 6.7 ft	913-3860
Pactec Inc	IBXP81612	X-Guard containment berm	16 ft / 8 ft / 1 ft	913-1033
Pactec Inc	IBXP91812	X-Guard containment berm	18 ft / 9 ft / 1 ft	913-1037
Pactec Inc	IBXP102212	X-Guard containment berm	22 ft / 10 ft / 1 ft	913-1049
Pactec Inc	IBXP122512	X-Guard containment berm	25 ft / 12 ft / 1 ft	913-1060
Pactec Inc	IBXP123212	X-Guard containment berm	32 ft / 12 ft / 1 ft	913-1063



Fuel Storage Tanks

Compact, transportable, diesel fuel storage tanks enable keeping a ready fuel supply on hand where and when you need it. These tanks are designed for on-site equipment refueling, backup fuel supply and preventing fuel delivery downtime.

Ideal For: Generators, refueling of job site machinery, vehicles, and light towers

UP TO 2,388 GAL
TANK CAPACITY



PRIMARY CONTAINER
SECONDARY CONTAINER



Lifting and Stacking

Liftable by crane and easily stackable. 2 high full, 3 high empty.



110% Containment

Double walled and built in weather proof containment. No need for pans or basins.



Four-way Forklift Pockets

Quick and easy maneuvering and mobility.



Monitor Fuel Levels

With ProControl NextGen



Extend Run Time



Fuel 2+ Pieces of Equipment

For 2+ Weeks

= SAVINGS
Rental pays for itself

Job Site Fuel Solution

Avoid Fuel Run-outs



FUEL TANKS

Diesel fuel storage tanks enable keeping a ready fuel supply on hand where and when you need it.

Features include:

- Stackable, with forklift pockets that allow for easy moving and placement
- Takes advantage of bulk fuel savings

UP TO 2,388 GAL TANK CAPACITY



MAKE	MODEL	CAPACITY	DIMENSIONS (LWH)	DRY WEIGHT	WET WEIGHT	CAT CLASS
Western Global	10TCG	251 gal	45.31 in / 45.31 in / 52.17 in	1,131 lb	3,114 lb	530-1020
Western Global	20TCG	552 gal	90.31 in / 45.35 in / 52.13 in	1,830 lb	6,315 lb	530-1050
Western Global	H20 TCG-HERC-12VK (TOWABLE)	523 gal	164.8 in / 85 in / 75 in	3,028 lb	7,408 lb	530-1060
Western Global	30TCG	787 gal	91 in / 61 in / 52 in	2,425 lb	8,721 lb	530-1070
Western Global	50TCG	1,204 gal	90.87 in / 90.87 in / 52.13 in	3,695 lb	13,329 lb	530-1090
Western Global	100TCG	2,388 gal	100.83 in / 89.80 in / 99.09 in	7,432 lb	26,539 lb	530-1100

DEF REPLENISHMENT SYSTEM

Manage diesel exhaust fluid required by Tier 4 Final diesel engines. This system extends runtimes by monitoring the DEF level in diesel powered generators and automatically refills DEF into the generator DEF tank unattended.

Features include:

- Extends generator run time
- Complements applications using external fuel

100 GAL TANK CAPACITY



MAKE	MODEL	CAPACITY	FLUID TYPE	DIMENSIONS (LWH)	DRY WEIGHT	WET WEIGHT	CAT CLASS
Multiquip	DEF-TANK	100 gal	Diesel Exhaust fluid, complies with ISO-22241	65.75 in / 44.75 in / 39.80 in	1,050 lb	2,020 lb	530-1005

HercRentals[®]


We'll give you the tools... you provide the talent

Learn more at careers.hercrentals.com



FUEL TANK RUN TIME CHART

Generators running at full load can consume large quantities of diesel fuel to keep the power on. Applications requiring long run times at peak load power can benefit from the addition of a fuel tank beyond the generator's day tank.

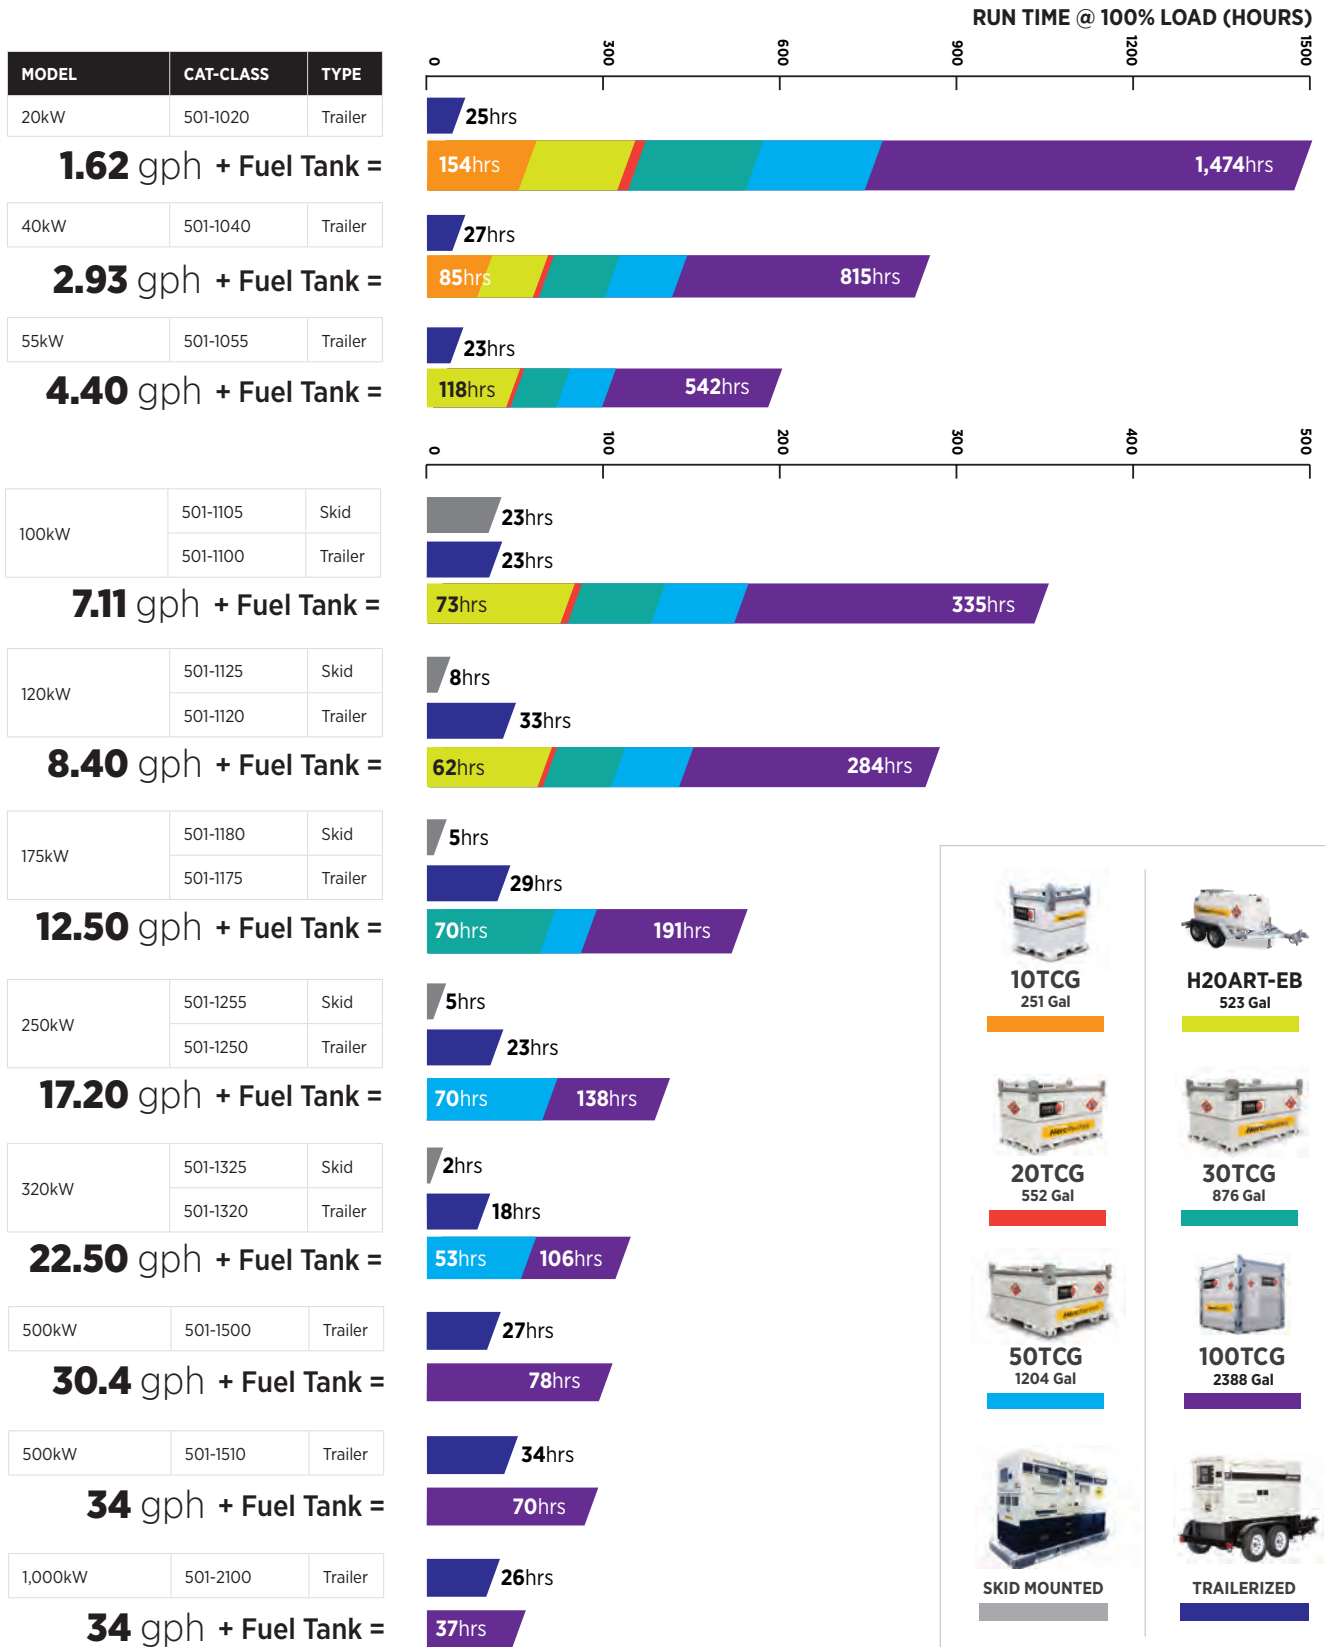

Real-time data to improve fleet efficiency and job site productivity.

ProControlTM NextGen



Fleet Diagnostics

Improve inefficiencies and reduce equipment downtime.

Monitor:

- Fuel and DEF levels
- Coolant temperatures
- Battery voltage
- Ignition status and more

Fleet Utilization

Reduce equipment downtime, become more proactive, and cost-conscious.

Track:

- Usage trends
- Utilization percentage
- Hours of equipment usage
- Miles traveled and more

Analytics and Reporting

Make informed decisions for your business with our robust reporting suite. Select from a library of pre-built reports or build your own.

- Analyze data that is meaningful, useful and actionable
- Schedule and send reports to yourself and other account contacts



Learn more at [HercRentals.com](https://www.HercRentals.com)

 **HercRentals**[®]



TRUCKS AND TRAILERS



TRUCKS

- Pick-up Trucks
- Utility Trucks
- Contractor Trucks
- Vans
- Stake Body Trucks
- Dump Trucks
- Water Trucks
- Bucket Trucks
- Attenuator Trucks
- Crane Trucks
- Terminal Tractors

TRAILERS

- Tilt Trailers
- Utility Trailers
- Dump Trailers
- Equipment Trailers
- Water Trailers
- Reel Trailers

CARTS

- Diesel
- Gas
- Electric



Medical Examiner's Certificate (ME Certificate)

All drivers of commercial motor vehicles in interstate commerce with a gross vehicle weight rating (vehicle only) or gross combination weight rating (vehicle plus trailer) of 10,001 pounds or more are required to obtain and maintain a valid Medical Examiner's Certificate (ME Certificate)

Commercial Driver's License (CDL)

CLASS A

Any combination of vehicles with a GVWR of 26,001 or more pounds provided the GVWR of the vehicle(s) being towed is in excess of 10,000 pounds.

GVWR/GCWR of at least

26,001 LB

TOWING MORE THAN

10,000 LB

CLASS B

Any single vehicle with a GVWR of 26,001 or more pounds, or any such vehicle towing a vehicle not in excess of 10,000 pounds GVWR.

GVWR/GCWR of at least

26,001 LB

TOWING LESS THAN

10,000 LB

CLASS C

Any single vehicle, or combination of vehicles, that does not meet the definition of Class A or Class B, but is either designed to transport 16 or more passengers, including the driver, or is placarded for hazardous materials.

License Endorsements

In addition to needing a CDL, some drivers may be required to have additional endorsements that allow them to operate specialized vehicles and carry a variety of cargo.

H – Hazardous Materials – Required in order to drive any commercial vehicle which transports hazardous materials and is placarded under state or federal regulations.

N – Tank Vehicles – A tanker endorsement is required when hauling a load with aggregate bulk packages of 119 gallons, totaling 1,000 gallons or more.

P – Passenger Transport (16 or more passengers)

X – Combination of Tank Vehicle and Hazardous Materials

License Restrictions

CDL licenses can be restricted in the following ways:

L Restriction - Air Brakes: Drivers are restricted from operating a commercial vehicle with air brakes. This restriction is issued when a driver either fails the air brake component of the general knowledge test or performs the road skills test in a vehicle not equipped with air brakes.

E Restriction - The driver may only operate a commercial vehicle with an automatic transmission.

O Restriction - The driver is restricted from operating a tractor trailer with a fifth-wheel connection if a unit with a pintle hook, or other non-fifth wheel connection is used (such as a goose neck, or ball and chain hook up) during the road skills test.

We Have a Truck for That

Herc Rentals is the only source you will need for a wide variety of quality trucks and trailers ready for rent. Choose from various cab configurations, capacities, bed lengths, and tow packages.



Gas



Diesel



Tow Package



Bluetooth*



Backup Camera



PICK-UP TRUCKS



Features:

- 1/2 Ton - 1 Ton models

GVWR
7,000-11,200 LB



UTILITY TRUCKS



Features:

- Storage Compartments

GVWR
10,700 LB



VANS



Features:

- Passenger and Cargo vans

GVWR
9,000 LB



BUCKET TRUCKS



Features:

- Insulated Bucket

GVWR
19,500 LB



STAKE BODY



Features:

- Removable Stakes
- Lift Gate

GVWR
16,500-25,999 LB



DUMP TRUCKS



Features:

- In-cab Controls
- Tarp System

GVWR
19,500-58,000 LB



WATER TRUCKS



Features:

- In-cab Controls
- 5 Spray Heads

**CDL
REQUIRED**

GVWR
33,000-62,000 LB



ATTENUATOR



Features:

- Removable Stakes
- 65 mph attenuator

GVWR
25,999 LB

ADD A TRAILER EQUIPMENT TRAILERS



GVWR
25,900-44,920 LB

PICK-UP TRUCKS


Features include:

- Back-up camera
- Bluetooth
- Tow package
- Spray-in bedliner
- ProControl NextGen

UP TO 1 TON



MAKE	MODEL	BODY / CAB STYLE	DRIVE TRAIN	FUEL TYPE	GVWR	PAYLOAD CAPACITY	TOW CAPACITY	CAT CLASS
Chevrolet	Colorado	Crew	4x4	Gas	6,000 lb	1,560 lb	7,000 lb	659-5005
Chevrolet	Silverado 1500	Regular	4x4	Gas	7,000 lb	2,052 lb	9,500 lb	659-5010
Chevrolet	Silverado 1500	Double	4x4	Gas	7,200 lb	1,967 lb	9,200 lb	659-5030
Chevrolet	Silverado 1500	Crew	4x4	Gas	7,200 lb	1,800 lb	9,100 lb	659-5050
Chevrolet	Silverado 2500	Crew	4x4	Gas	9,900 lb	2,968 lb	13,900 lb	659-5160
Chevrolet	Silverado 3500	Crew	4x4	Gas	11,000 lb	4,099 lb	13,700 lb	659-5240

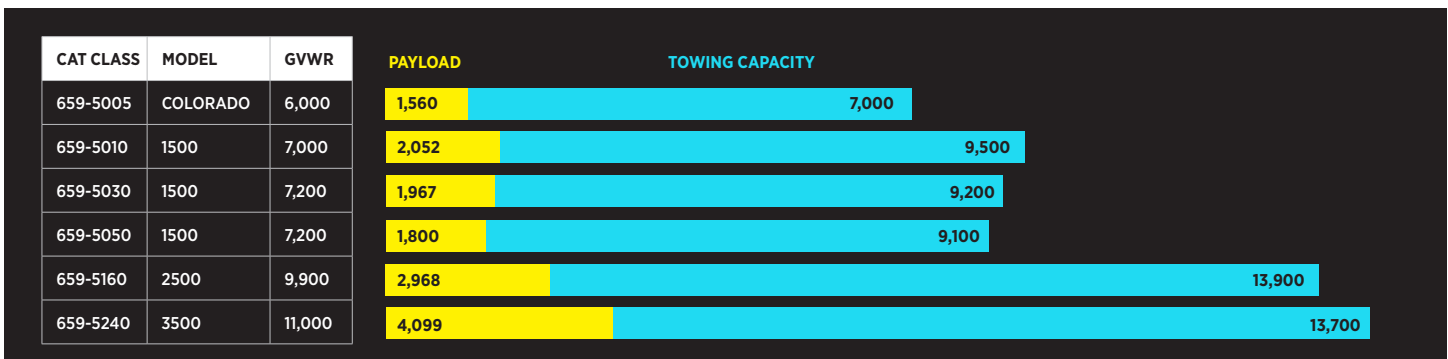

UTILITY TRUCK

Features include:

- Storage compartments
- Ladder rack
- Back-up camera
- Bluetooth
- Tow package

CREW CAB



MAKE	MODEL	DRIVE TRAIN	FUEL TYPE	GVWR	CDL REQUIRED	CAT CLASS
Chevrolet	3500	4x4	Gas	11,500 lb	No	659-5925

CONTRACTOR TRUCK

Features include:

- Fork lift loadable material rack
- Built-in cab guard
- (2) 96 inch L topside toolboxes
- (2) 48 inch L underbody toolboxes

11 FT BED



MAKE	MODEL	BODY / CAB STYLE	DRIVETRAIN	FUEL TYPE	GVWR	CDL REQUIRED	CAT CLASS
Ford	F-550	Regular	4x4	Gas	19,500	No	659-5965
Ford	F-550	Crew	4x4	Gas	19,500	No	659-5975

CARGO VANS

Features include:

- Large cargo volume behind front seat
- Swing-open rear doors; sliding side door
- Bluetooth
- Tow package
- ProControl NextGen

3/4 TON
100 IN
ROOF HEIGHT



MAKE	MODEL	DRIVE TRAIN	FUEL TYPE	GVWR	PAYLOAD CAPACITY	TOW CAPACITY	CAT CLASS
Ford	T250	4x2	Gas	9,000 lb	3,600 lb	5,200 lb	659-5470

PASSENGER VANS

Features include:

- Backup camera
- Tow package
- ProControl NextGen

UP TO 15 PERSON



MAKE	MODEL	SEATING	DRIVE TRAIN	FUEL TYPE	GVWR	PAYLOAD CAPACITY	TOW CAPACITY	CAT CLASS
Ford	T350	12 person	4x2	Gas	9,000 lb	2,800 lb	4,300 lb	659-5510
Ford	T350	15 Person	4x2	Gas	9,400 lb	2,800 lb	4,300 lb	659-5540

STAKE BODY TRUCKS

Built to be versatile and tough and are ideal for hauling bulk materials and pallets.

Features include:

- Removable stakes
- Lift gate
- Tow package

UP TO 22 FT



MAKE	MODEL	BODY / CAB STYLE	DRIVE TRAIN	FUEL TYPE	GVWR	PAYLOAD CAPACITY	TOW CAPACITY	CAT CLASS
Ford	F-550	12 ft Stake bed / Standard	4x4	Gas	19,500 lb	7,600 lb	10,000 lb	659-5630
Ford	F-550	12 ft Stake bed / Crew	4x4	Gas	19,500 lb	5,900 lb	10,000 lb	659-5725
Ford	F-750	22 ft Stake bed / Standard	4x2	Gas	25,999 lb	10,100 lb	6,000 lb	659-5790

DUMP TRUCKS

Haul gravel, sand, demolition waste or other loose material.

Features include:

- Tarp system
- In-cab bed controls
- Tow package

**UP TO 14 YD
DUMP CAPACITY**



MAKE	MODEL	BODY /CAB STYLE	DRIVE TRAIN	FUEL TYPE	GVWR	CDL REQUIRED	PAYLOAD CAPACITY	TOW CAPACITY	CAT CLASS
Ford	F-550	3 - 4 Yard / Standard	4x4	Gas	19,500	No	7,000 lb	10,000 lb	659-6110
Ford	F-550	3 - 4 Yard / Crew	4x4	Gas	19,500	No	7,000 lb	10,000 lb	659-6135
Ford	F-750	5 - 6 Yard	4x2	Gas	25,999	No	10,900 lb	10,000 lb	659-6160
Freightliner	M2-106	12 - 14 Yard - Automatic Transmission	4x2	Diesel	58,000	Yes	33,000 lb	44,920 lb	659-6210

WATER TRUCKS

Ideal for controlling dust on construction sites, as well as for mining, cleaning, fire-prevention, landscape and agricultural watering and filling swimming pools.

Features include:

- Creek and hydrant fill options
- 5 spray heads
- In-cab controls
- Back-up camera
- Bluetooth

**UP TO 4,000 GAL
TANK CAPACITY**



MAKE	MODEL	TANK CAPACITY	DRIVE TRAIN	FUEL TYPE	GVWR	CDL REQUIRED	CAT CLASS
Ford	F750	2,000 gal	4x2	Gas	33,000 lb	Yes	659-6030
Freightliner	M2-106	4,000 gal	4x2	Diesel	58,000 lb	Yes	659-6050
Freightliner	108SD	4,000 gal	6x6	Diesel	62,000 lb	Yes	659-6052

BUCKET TRUCKS

Features include:

- Articulating arm
- Insulated bucket
- 3-story reach

**45 FT
WORKING HEIGHT**



MAKE	MODEL	DRIVE TRAIN	FUEL TYPE	GVWR	CDL REQUIRED	CAT CLASS
Ford	F-550	4x4	Gas	19,500 lb	No	659-6315

ATTENUATOR TRUCKS

Designed to save lives in a construction work zone, the attenuator absorbs the impact of a high or low speed crash when struck from behind.

Features include:

- Removable stakes
- Personnel bucket
- Strobe and work lights

62 MPH
RATED ATTENUATOR



MAKE	MODEL	DRIVE TRAIN	FUEL TYPE	GVWR	CDL REQUIRED	CAT CLASS
Ford	F750	4x2	Gas	25,999 lb	No	659-6250

CRANE TRUCKS

Mobile cranes that use hydraulics to lift equipment or supplies that weigh thousands of pounds safely and efficiently.

Features include:

- Anti two-block
- Hydraulic capacity alert

18 TON | **71 FT**
BOOM



MAKE	MODEL	DRIVE TRAIN	FUEL TYPE	GVWR	CDL REQUIRED	CAT CLASS
Ford	F-750	4x2	Diesel	33,000 lb	Yes	659-6380

TERMINAL TRACTORS

Ideal for ports, intermodal, or warehouse and distribution purposes where there are rough surface conditions like potholes and railroad crossings.

Features include:

- 33 mph max road speed
- Backup alarm, front and rear tow eyes

70,000 LB
TOW CAPACITY



MAKE	MODEL	DRIVE TRAIN	FUEL TYPE	GVWR	CDL REQUIRED	CAT CLASS
Capacity	TJ5000	4x2	Diesel	81,000 lb	Yes	659-6440
Ottawa	T2	4x2	Diesel	81,000 lb	Yes	659-6440

TILT TRAILERS

Ideal for transporting equipment, riding mowers, off-road vehicles, motorcycles and more.

Features include:

- D-rings/corner ties
- Chains/binders
- Headache rack

UP TO 18 FT
LENGTH



MAKE	MODEL	DESCRIPTION	GVWR	PAYLOAD CAPACITY	HITCH TYPE	CAT CLASS
Felling	FT-6T-GW	12 ft Pan Tilt	7,000 lb	5,350 lb	2 in Ball	610-1766
Felling	FT-10IT-I-G	16 ft Tilt	9,980 lb	7,380 lb	3 in Pintle	610-1770
Felling	FT-12IT-I-G	18 ft Tilt	15,200 lb	12,000 lb	3 in Pintle	610-1780

UTILITY TRAILERS

Lightweight trailers easily attach to any hitch and provide the extra room you need for tools, equipment, supplies or yard waste.

Features include:

- Tailgate ramp
- Safety chains
- LED taillights
- D-rings/corner ties

UP TO 10 FT
LENGTH

UP TO 36 IN
DEPTH



MAKE	MODEL	DESCRIPTION	GVWR	PAYLOAD CAPACITY	HITCH TYPE	CAT CLASS
Felling	FT-3-G	10 ft Pan Utility	2,900 lb	1,800 lb	2 in Ball	610-1059
Best	5x8US	8 ft Open Top Box	2,999 lb	2,000 lb	2 in Ball	610-2600

DUMP TRAILERS

When you need to haul heavy loads, but your project doesn't require a full-sized dump truck.

Features include:

- Swing-open rear doors or ramp with gate
- Magnetized remote
- Roll tarp

UP TO 10 FT
LENGTH



MAKE	MODEL	GVWR	PAYLOAD CAPACITY	HITCH TYPE	CAT CLASS
Felling	FT-6DT-GAS-G	7,000 lb	4,500 lb	2 in Ball	610-2200
Felling	FT-10DT-GAS-G	9,980 lb	7,000 lb	3 in Pintle	610-2230

CABLE REEL TRAILERS

Design to move reels of cable from job site to job site.



MAKE	MODEL	DESCRIPTION	GVWR	PAYLOAD	CAT CLASS
Felling	FT8-R-G	Single cable reel trailer	9,200 lb	7,200 lb	610-1500

EQUIPMENT TRAILERS

The payload capacity you need to move the biggest and heaviest equipment from one job site to another.

Features include:

- Toolbox with lockable cover
- LED lighting
- D-rings

**20 FT
DECK LENGTH**



MAKE	MODEL	DESCRIPTION	GVWR	PAYLOAD CAPACITY	BRAKE TYPE	HITCH TYPE	CAT CLASS
Felling	FT-20LP	20 ft Flat deck with ramps	25,900 lb	20,000 lb	Electric	3 in Pintle	610-1170
Felling	FT-40LP	40 ft Flat deck with ramps	44,920 lb	36,320 lb	Air	3 in Pintle	610-1240

WATER TRAILERS

Ideal for a variety of uses, including dust control, emergency fire response, construction, agricultural support and washing down field equipment.

Features include:

- 2-inch centrifugal pumps
- DOT/NHTSA approved dual axle trailer
- Quick fill tank

**150 GAL
PER MINUTE**

**525 GAL
TANK CAPACITY**




MAKE	MODEL	GVWR	TANK CAPACITY	HITCH TYPE	CAT CLASS
Multiquip	WT5C	10,000 lb	525 gal	2 in ball	610-2420
Wylie	EXP-800-S	10,000 lb	800 gal	2 in ball	610-2430

HercRentals®

**We'll give
you the tools...
you provide
the talent**

Learn more at careers.hercrentals.com

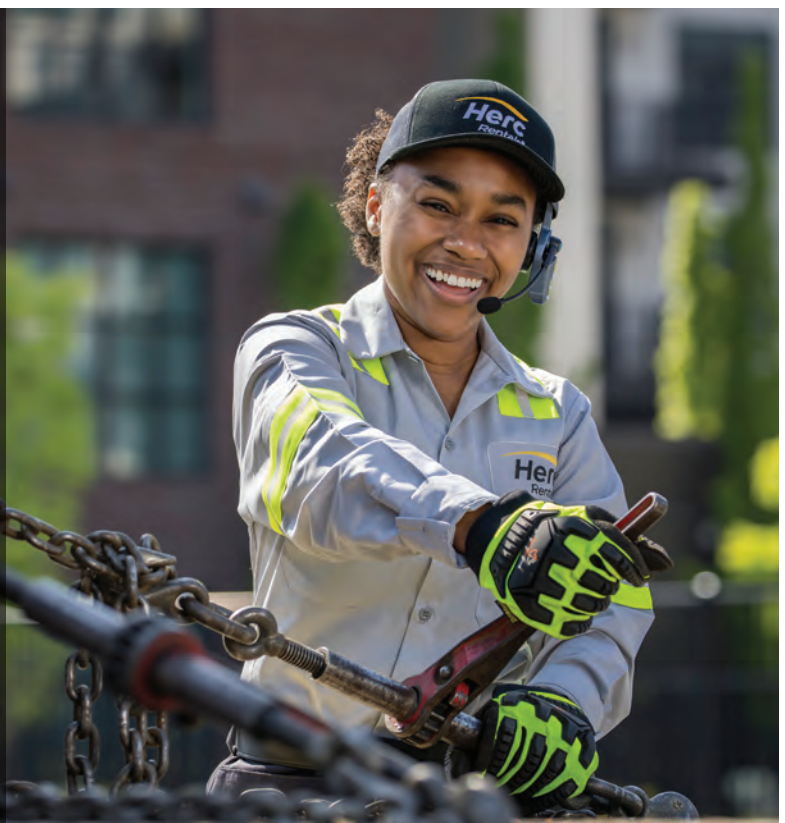

OFF-ROAD VEHICLES

Off-road utility passenger vehicles, sometimes called side-by-sides or UTVs, are small, two-to-six person, 4WD, off-road vehicles.

Features include:

- Seatbelts
- Roll-over protection
- Dynamic braking
- Rear cargo box can be modified into a hydraulic dumping bed
- 19.1 cu. ft. of dump bed capacity with rear seats removed

UP TO 4 PASSENGERS
Kubota



MAKE	MODEL	TOP SPEED	SHORT BED CAPACITY	LONG BED CAPACITY	PASSENGERS	DRIVE TRAIN	FUEL TYPE	HORSEPOWER	CAT CLASS
John Deere	815E	25 mph	N/A	1,000 lb	2	4WD	Diesel	18.2 hp	630-1230
Kubota	RTV-X1100 CAB	25 mph	N/A	1,102 lb	2	4WD	Diesel	24.8 hp	630-1240
Kubota	RTV-X1140 ROPS	25 mph	661 lb	1,102 lb	2 or 4	4WD	Diesel	24.8 hp	630-1280
John Deere	855M	32 mph	N/A	1,000 lb	4	4WD	Diesel	22.8 hp	630-1280

CARTS

Small Motorized vehicle designed to transport personnel typically on paved or hard surfaces.

Features include:

- Bench Style Seating
- Shaded Canopy

UP TO 6 PASSENGERS
EZGO CUSHMAN



MAKE	MODEL	PASSENGERS	POWER TYPE	DIMENSIONS (LWH)*	CAT-CLASS
Club Car	Tempo	4	Gas	108 in / 43.75 in / 71 in	630-1120
Club Car	Tempo	4	Electric	108 in / 43.75 in / 71 in	630-1130
EZGO	TXT	4	Electric	115 in / 48.5 in / 82 in	630-1130
Cushman	Shuttle 6 EFI	6	Gas	136 in / 48.5 in / 72 in	630-1160

BURDEN CARTS

Carriers are that are equipped with a platform that can be used to carry materials and supplies.


Features include:

- Up to 40 Mile Range
- 3000 lb Load Capacity

7,500 LB TOWING CAPACITY
TAYLOR-DUNN



MAKE	MODEL	TOWING CAPACITY	PASSENGERS	RANGE	POWER TYPE	CAT-CLASS
Taylor Dunn	Bigfoot 36V	7,500 lb	2	30 Miles	Electric	630-1060
Taylor Dunn	Bigfoot 48V	7,500 lb	2	40 Miles	Electric	630-1060
Taylor Dunn	Bigfoot 48V	7,500 lb	4	40 Miles	Electric	630-1080

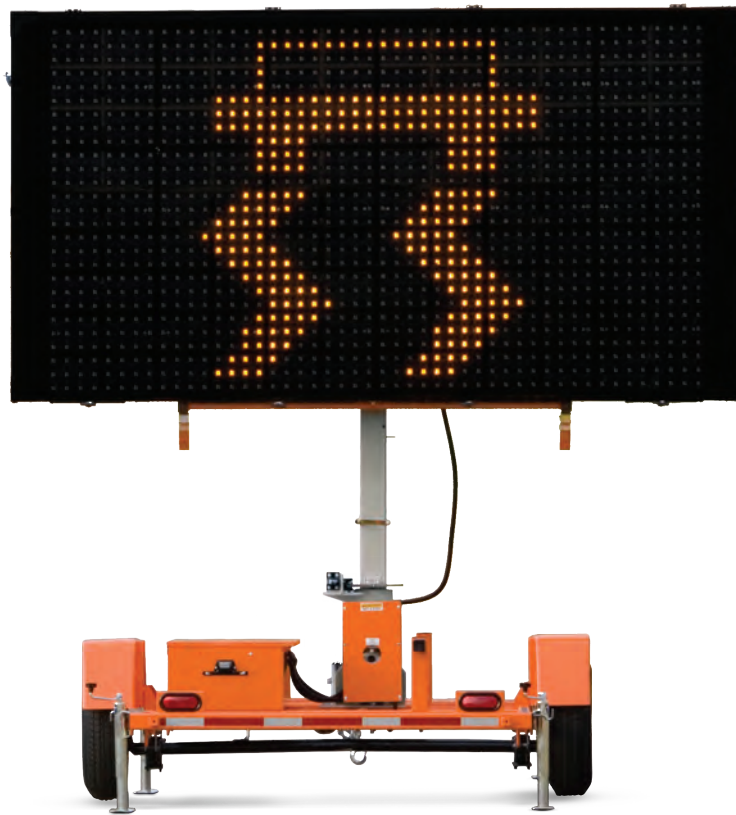

JOB SITE AND TRAFFIC SOLUTIONS



Storage Containers
Surveillance
Ground Protection
Noise Reduction Panels
Traffic Cones

Barriers and Fencing
Message Boards
Arrow Boards
Speed Radar

STORAGE CONTAINERS

Protect your tools, equipment and building materials with Herc Rentals' storage containers.

Features include:

- Steel containers with wood floors
- Lockbox cover to deter theft
- 20-foot container has door handles at 36-inches for easy opening/closing, 4 vents for improved air circulation and moisture build-up prevention
- 40-foot container has doors on each side, making access easier and allows for installation of dividing wall for office space

20-40 FT CONTAINERS



MAKE	MODEL	EXTERNAL DIMENSIONS (LWH)	EMPTY WEIGHT	CAT CLASS
Waterfront Container	20 ft	20 ft / 8 ft / 8 ft 6 in	4,800 lb	610-2810
Waterfront Container	40 ft	40 ft / 8 ft / 8 ft 6 in	8,400 lb	610-2845

SURVEILLANCE

Keep a watchful eye on your job site, parking lot, outdoor event and more.

Features include:

- Heavy-duty secure battery box
- Tie-downs can be anchored to the ground or other equipment
- High-speed 4G LTE cellular modem with built-in GPS
- LAN Wi-Fi connectivity, 2.4 or 5.8 GHz
- Cameras are day/night PTZ dome style with 360° rotation



MAKE	MODEL	POWER SOURCE	DIMENSIONS (LWH)	WEIGHT	CAT CLASS
Wanco	WCTS-Mini HD secondary camera	390W Solar Panel, (2) 200AH AGM Batteries	72 in / 82 in / 108 in	1,300 lb	175-1100
Wanco	Mini-Dome	Surveillance Tower	22 in / 5 in / 5 in	15 lb	175-1110

GROUND PROTECTION

Wet or unsteady ground can cause trucks to become stuck, equipment to fail, and create a hazardous work environment for your team.

Features and applications include:

- Stronger than plywood and will not rot or splinter
- Each mat is 4 X 8 feet molded HDPE plastic that weighs 86 pounds
- Can be placed and positioned without any special tools
- Ideal for use in the oil and gas industry, construction sites, mining operations, pipeline construction, disaster relief, public works, special events and more



MAKE	MODEL	APPLICATION	WEIGHT CAPACITY	DIMENSIONS TOTAL (LWH)	DIMENSIONS USABLE (LWH)	WEIGHT	CAT CLASS
Blue Gator	GTMAT4X8NAT	Heavy duty	200 psi	4 ft / 8 ft / .5 in	4 ft / 8 ft / .5 in	80 lb	930-9110
Blue Gator	GTMAT4X8BLK	Heavy duty	200 psi	4 ft / 8 ft / .5 in	4 ft / 8 ft / .5 in	80 lb	930-9110

NOISE REDUCTION PANELS



Also known as noise attenuation barriers, the units are easy-to-move, easy-to-install, easy-to-store and a cost-effective way to curtail noise.

Features and applications include:

- Can be double or triple stacked for added sound reduction
- Reflective strips enhance nighttime visibility
- Lightweight, waterproof and fire, chemical and dust resistant

UP TO 40 DB
NOISE CONTROL



MAKE	MODEL	DIMENSIONS (LWH)	CAT CLASS
Justrite	26460H	4.3 ft / 6.7 ft	913-3860

SAFETY CONES

Traffic control devices are highly-visible and durable.

Features include:

- Hot and cold weather performance
- High visibility
- Industry leading stability and durability



MAKE	MODEL	TYPE	HEIGHT	WEIGHT	CAT CLASS
TrafFix Devices	16036-HIWB-10 Enviro-Cone	Traffic Cone	36 in	12 lb	913-3747

TRAFFIC CONES

With our urbanite pedestrian barrier, you can create a safe pedestrian walkway around or through a construction zone.

Features include:

- Industry leading stability and durability
- Built-in handles for ease of movement and deployment



MAKE	MODEL	TYPE	HEIGHT	WEIGHT	CAT CLASS
TrafFix Devices	42144-TS0212-HIP Grabber-Tube II	Delineators	42 in	12 lb	913-3712

CRASH BARRIERS / FENCING

Designed with water fill-holes for stability and integrated steel cables to reduce vehicle penetration on impact.

Features include:

- Stackable, lock together and have forklift slots for easy movement
- Capable of attaching 6-foot fencing and gate for added protection



MAKE	MODEL	DESCRIPTION	DIMENSIONS (LWH)	CAT CLASS
TrafFix Devices	45332	Water-cable crash barrier (TL-1 + TL-2 rated)	6 ft / 1.5 ft / 3.2 ft	913-3766
TrafFix Devices	45032-WWF	Chain link fence section for crash barrier	6 ft / 2 in / 4 ft	913-3780
TrafFix Devices	45032-WWFG-C	Chain link gate kit for crash barrier	6 ft / 2 in / 6 ft	913-3782

PEDESTRIAN BARRIERS

Create a safe pedestrian walkway around or through a construction zone.

Features include:

- Integrated handrail system
- Lock together



MAKE	MODEL	DESCRIPTION	DIMENSIONS (LWH)	WEIGHT	CAT CLASS
Traffix Devices	45032-WWF	6 ft Chain Link Fence Section	72 in / 2 in / 48 in	32 lb	913-3780
Traffix Devices	45032-WWFG-C	6 ft Single Gate Attachment	72 in / 2 in / 72 in	65 lb	913-3782


MESSAGE BOARDS



Ideal for when you need to get information to the public.

Features include:

- Easiest programming in the industry
- 2,650 lb so can be towed by most vehicles
- Rotates 360 degrees for optimal positioning



MAKE	MODEL	TYPE	POWER	LIFT TYPE	DIMENSIONS	CAT CLASS
Wanaco	WTMMB-A	Full Matrix Message Board	Battery and Solar	Hydraulic	186 in / 138 in / 123 in	660-1070
Wanaco	WTLMB-A	3-Line Message Board	Battery and Solar	Hydraulic	186 in / 138 in / 123 in	660-1040

ARROW BOARDS



Ideal for directing traffic around work zones.

Features include:

- Consumes 80% less power than other boards
- At least 1-mile visibility
- 7-pattern display and 5-pattern sequencing



MAKE	MODEL	POWER	LIFT TYPE	DIMENSIONS	CAT CLASS
Wanaco	WTSP55-LSAC	Battery and Solar	Hand-operated winch	119 in / 96 in / 136 in	660-1020

SPEED RADAR



Often deployed in school zones, work zones and high-incident areas, these signs provide a degree of traffic calming unmatched by other roadway signs.


Features include:

- Perfect for residential and 2-lane roads
- Battery powered and solar charging
- Under 900 lb, can be towed by most vehicles
- Bold, highly visible, 26-inch LED numbers



MAKE	MODEL	POWER	LIFT TYPE	DIMENSIONS	CAT CLASS
Wanaco	WSDT3-S	Battery and Solar	Hand-operated winch	106 in / 61 in / 123 in	660-1100

SCAN QR CODE TO FIND A LOCATION NEAR YOU.




TYPES OF BRANCHES



General Rental - Our classic fleet includes aerial, earthmoving, material handling, trucks and trailers, air compressors, compaction, lighting, and ProContractor specialty equipment includes professional grade tools.



ProSolutions - Our Industry-specific solutions-based services, includes power generation, climate control remediation and restoration, and studio and production equipment.

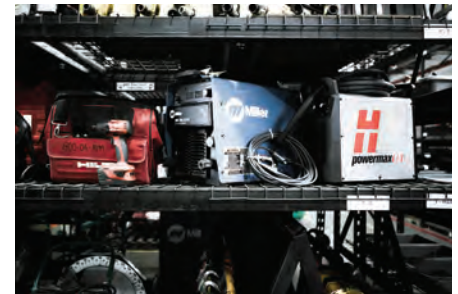

ProResources - Industrial line of products and services that include equipment, supplies, tools, customized mobile tool rooms, and high-tech asset management systems.

OTHER SPECIALITY BRANCHES

ProTrucks - Herc Rentals is the only source you will need for a wide variety of quality commercial trucks and trailers ready for rent. Choose from various cab configurations, capacities, bed lengths, and tow packages.

HES - Herc Entertainment Service (HES) specializes in Film, TV, and Live Event rentals. We carry entertainment specific products to fit your production's needs. From aerial equipment, forklifts, carts, lighting equipment, generators, ground cover, and climate products.

ProControlTM

NextGen

The Future of the Equipment Rental Industry is Here.



Account Management

Customize your dashboard to put analytics, PO management, bill payment and more right at your fingertips.




Fleet Management

Real-time analytics, utilization, diagnostics, and alerts. Use actionable data to reduce downtime, right-size rental fleet and eliminate redundancy.



Herc Rentals Ecommerce

Customer-focused ecommerce experience. Browse and rent equipment anytime, from anywhere.

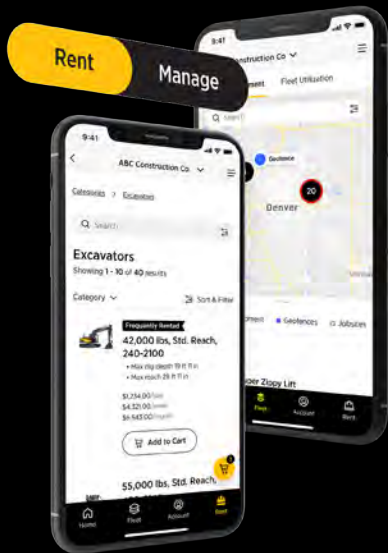

ProControl NextGen delivers visibility and insight into your entire rental and fleet management experience.

ProControl NextGen from Herc Rentals is the new standard for fleet and account management in the equipment rental industry. This new solution uses advanced technology to power a feature-rich website and mobile app, a user-friendly ecommerce solution, robust account management tools, a revolutionary fleet management platform, including telematics for optimum fleet productivity and analytics, and unparalleled custom reporting — all-in-one, easy to navigate place.



HercRentals[®]

HercRentals.com